PROJECT NO. 5985-0839-7

FED. SUP CLASS
5985

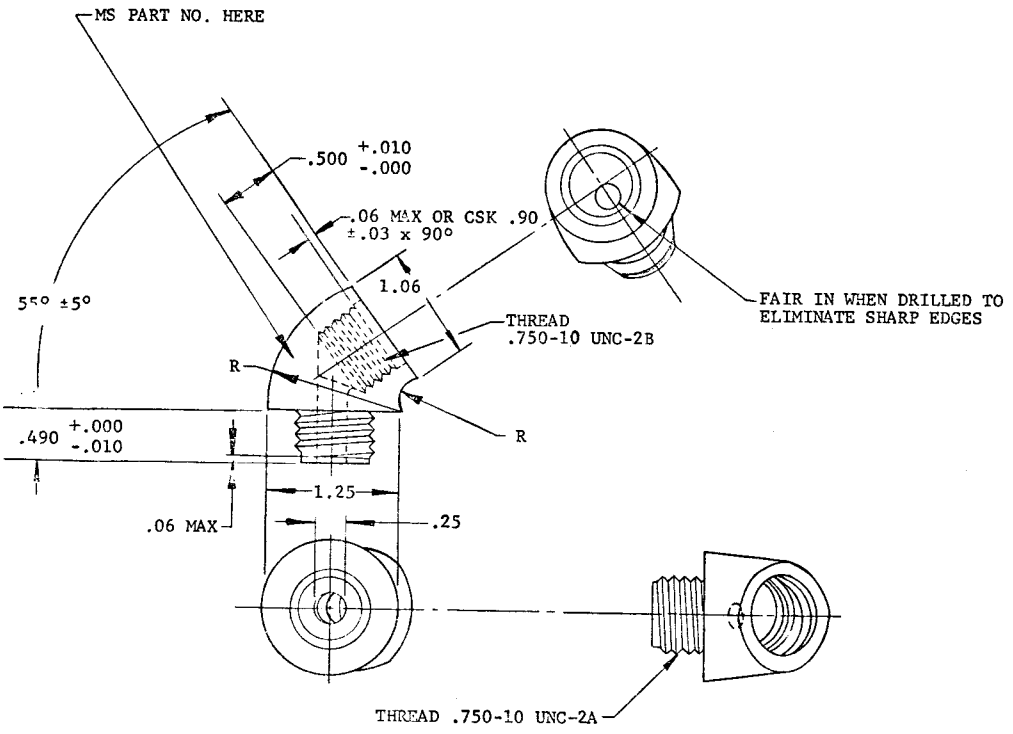

MS PART NO.
MS25055-1A
MS25055-1B

NOTES:

1. MATERIAL: DIELECTRIC MATERIAL SUITABLE FOR THE PURPOSE.
2. EXAMPLES OF PART NUMBERS: MS25055-1A = ELBOW, LEAD-THROUGH INSULATOR, ANTENNA, 7,500 VOLTS.
   MS25055-1B = ELBOW, LEAD-THROUGH INSULATOR, ANTENNA, 10,000 VOLTS.
3. DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.01, THREE-PLACE DECIMALS ±.005, ANGLES ±1/2°.
4. THREADS SHALL CONFORM TO MIL-S-7742.
5. MAXIMUM WEIGHT .08 POUND.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 18 AUG 55 REVISED (A) 18 JUNE 76

(A) REVISED

P.A. NAVY - AS Other Cust	TITLE	MILITARY STANDARD
USAF - 85	ELBOW, LEAD-THROUGH INSULATOR, ANTENNA	MS25055
PROCUREMENT SPECIFICATION: MIL-A-7965	SUPERSEDES: MS25055(ASG)	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO. 23065

☆U.S. GOVERNMENT PRINTING OFFICE: 1976—603-766/5441

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:02Z
Check the source to verify that this is the current version before use.