
FED. SUP CLASS
5950

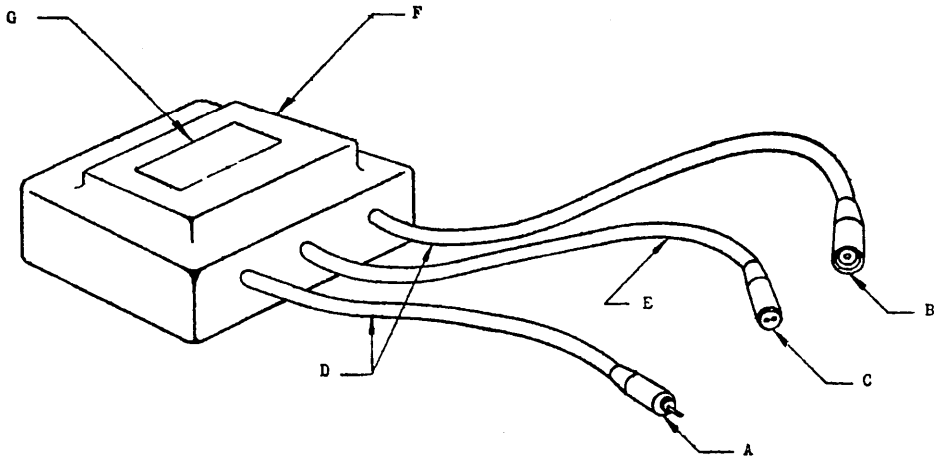

ELECTRICAL CHARACTERISTICS					
PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS (A)	LOAD (A)
6.6	95	90		6.53-6.67	12.0 OHMS (a)
6.6				6.6 -7.1	SHORT CIRCUITED
6.6			230	0	OPEN CIRCUITED
5.2				5.1 -5.4	10.0 OHMS (a)
4.1				4.0 -4.3	8.3 OHMS (a)
3.4				3.3 -3.6	7.0 OHMS (a)
2.8				2.7 -3.0	5.0 OHMS (a)

(a) THE LOAD MAY BE EITHER A 500W, 6.6A LAMP OR THE OHMIC RESISTANCE SPECIFIED.

A PLUG FIGURE 6a FAA SPECIFICATION L-823.
B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823.
C RECEPTACLE FIGURE 1c FAA SPECIFICATION L-823.
D PRIMARY CABLE.
E SECONDARY CABLE.
F CASE.
G IDENTIFICATION MARKING (LOCATION OPTIONAL).

PART NO.	LEAD LENGTH INCHES	
	D	E
MS27135-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES.

MAXIMUM WEIGHT 25 POUNDS.

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 May 64 REVISED (A) 18 Aug 65

P.A. USAF - 11 Other Cust Navy - WP	TITLE TRANSFORMER, POWER, ISOLATION; AIRPORT LIGHTING, 500W/6.6A/6.6A/5000V	MILITARY STANDARD MS27135(ASG)
PROCUREMENT SPECIFICATION MIL-T-27535	SUPERSEDES:	SHEET 1 OF 1

Review activities: AF - 85, 11
Navy - WP

This standard is approved by the [illegible] (Department of the Air Force) and the Department of the Navy and is mandatory for use by all activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.