
FED. SUP CLASS
5950

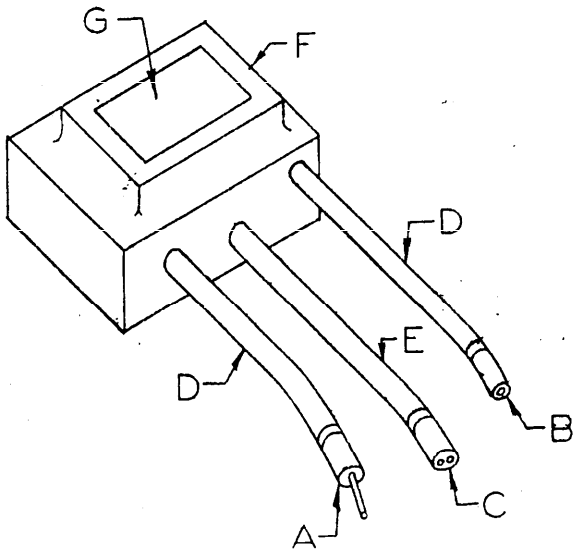

ELECTRICAL CHARACTERISTICS

PRI AMPS	PRI POWER FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS	LOAD (A)
20	95	85	65	19.8-20.2	0.27 OHMS (a)
20				20.0-22.0	SHORT CIRCUITED
20				0	OPEN CIRCUITED
15.6				15.6-16.2	0.21 OHMS (a)
12.4				12.2-12.9	0.17 OHMS (a)
10.3				10.2-10.8	0.15 OHMS (a)
8.5				8.4-8.9	0.11 OHMS (a)

(a) THE LOAD MAY BE EITHER A 100W, 20A LAMP OR THE OHMIC RESISTANCE SPECIFIED.

A PLUG FIGURE 6A FAA SPECIFICATION L-823
B RECEPTACLE FIGURE 6B FAA SPECIFICATION L-823
C RECEPTACLE FIGURE 1C FAA SPECIFICATION L-823
D PRIMARY CABLE
E SECONDARY CABLE
F CASE
G IDENTIFICATION MARKINGS

PART NO.	LEAD LENGTH	
	D	F
MS27362-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES.

MAXIMUM WEIGHT 20 POUNDS.

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

APPROVED 1 Dec 64 REVISED (A) 18 Aug 65

Review activities: USAF - 85, 11 Navy - WP

This standard has been approved by the Department of the Air Force (11) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - WP	TITLE TRANSFORMER, POWER, ISOLATION; AIRPORT LIGHTING 100W/20A/20A/5,000V	MILITARY STANDARD MS27362(ASG)
PROCUREMENT SPECIFICATION MIL-T-27535	SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.