USER SYMBOLS:

REVIEWER SYMBOLS:

"Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

FED. SUP CLASS
6610

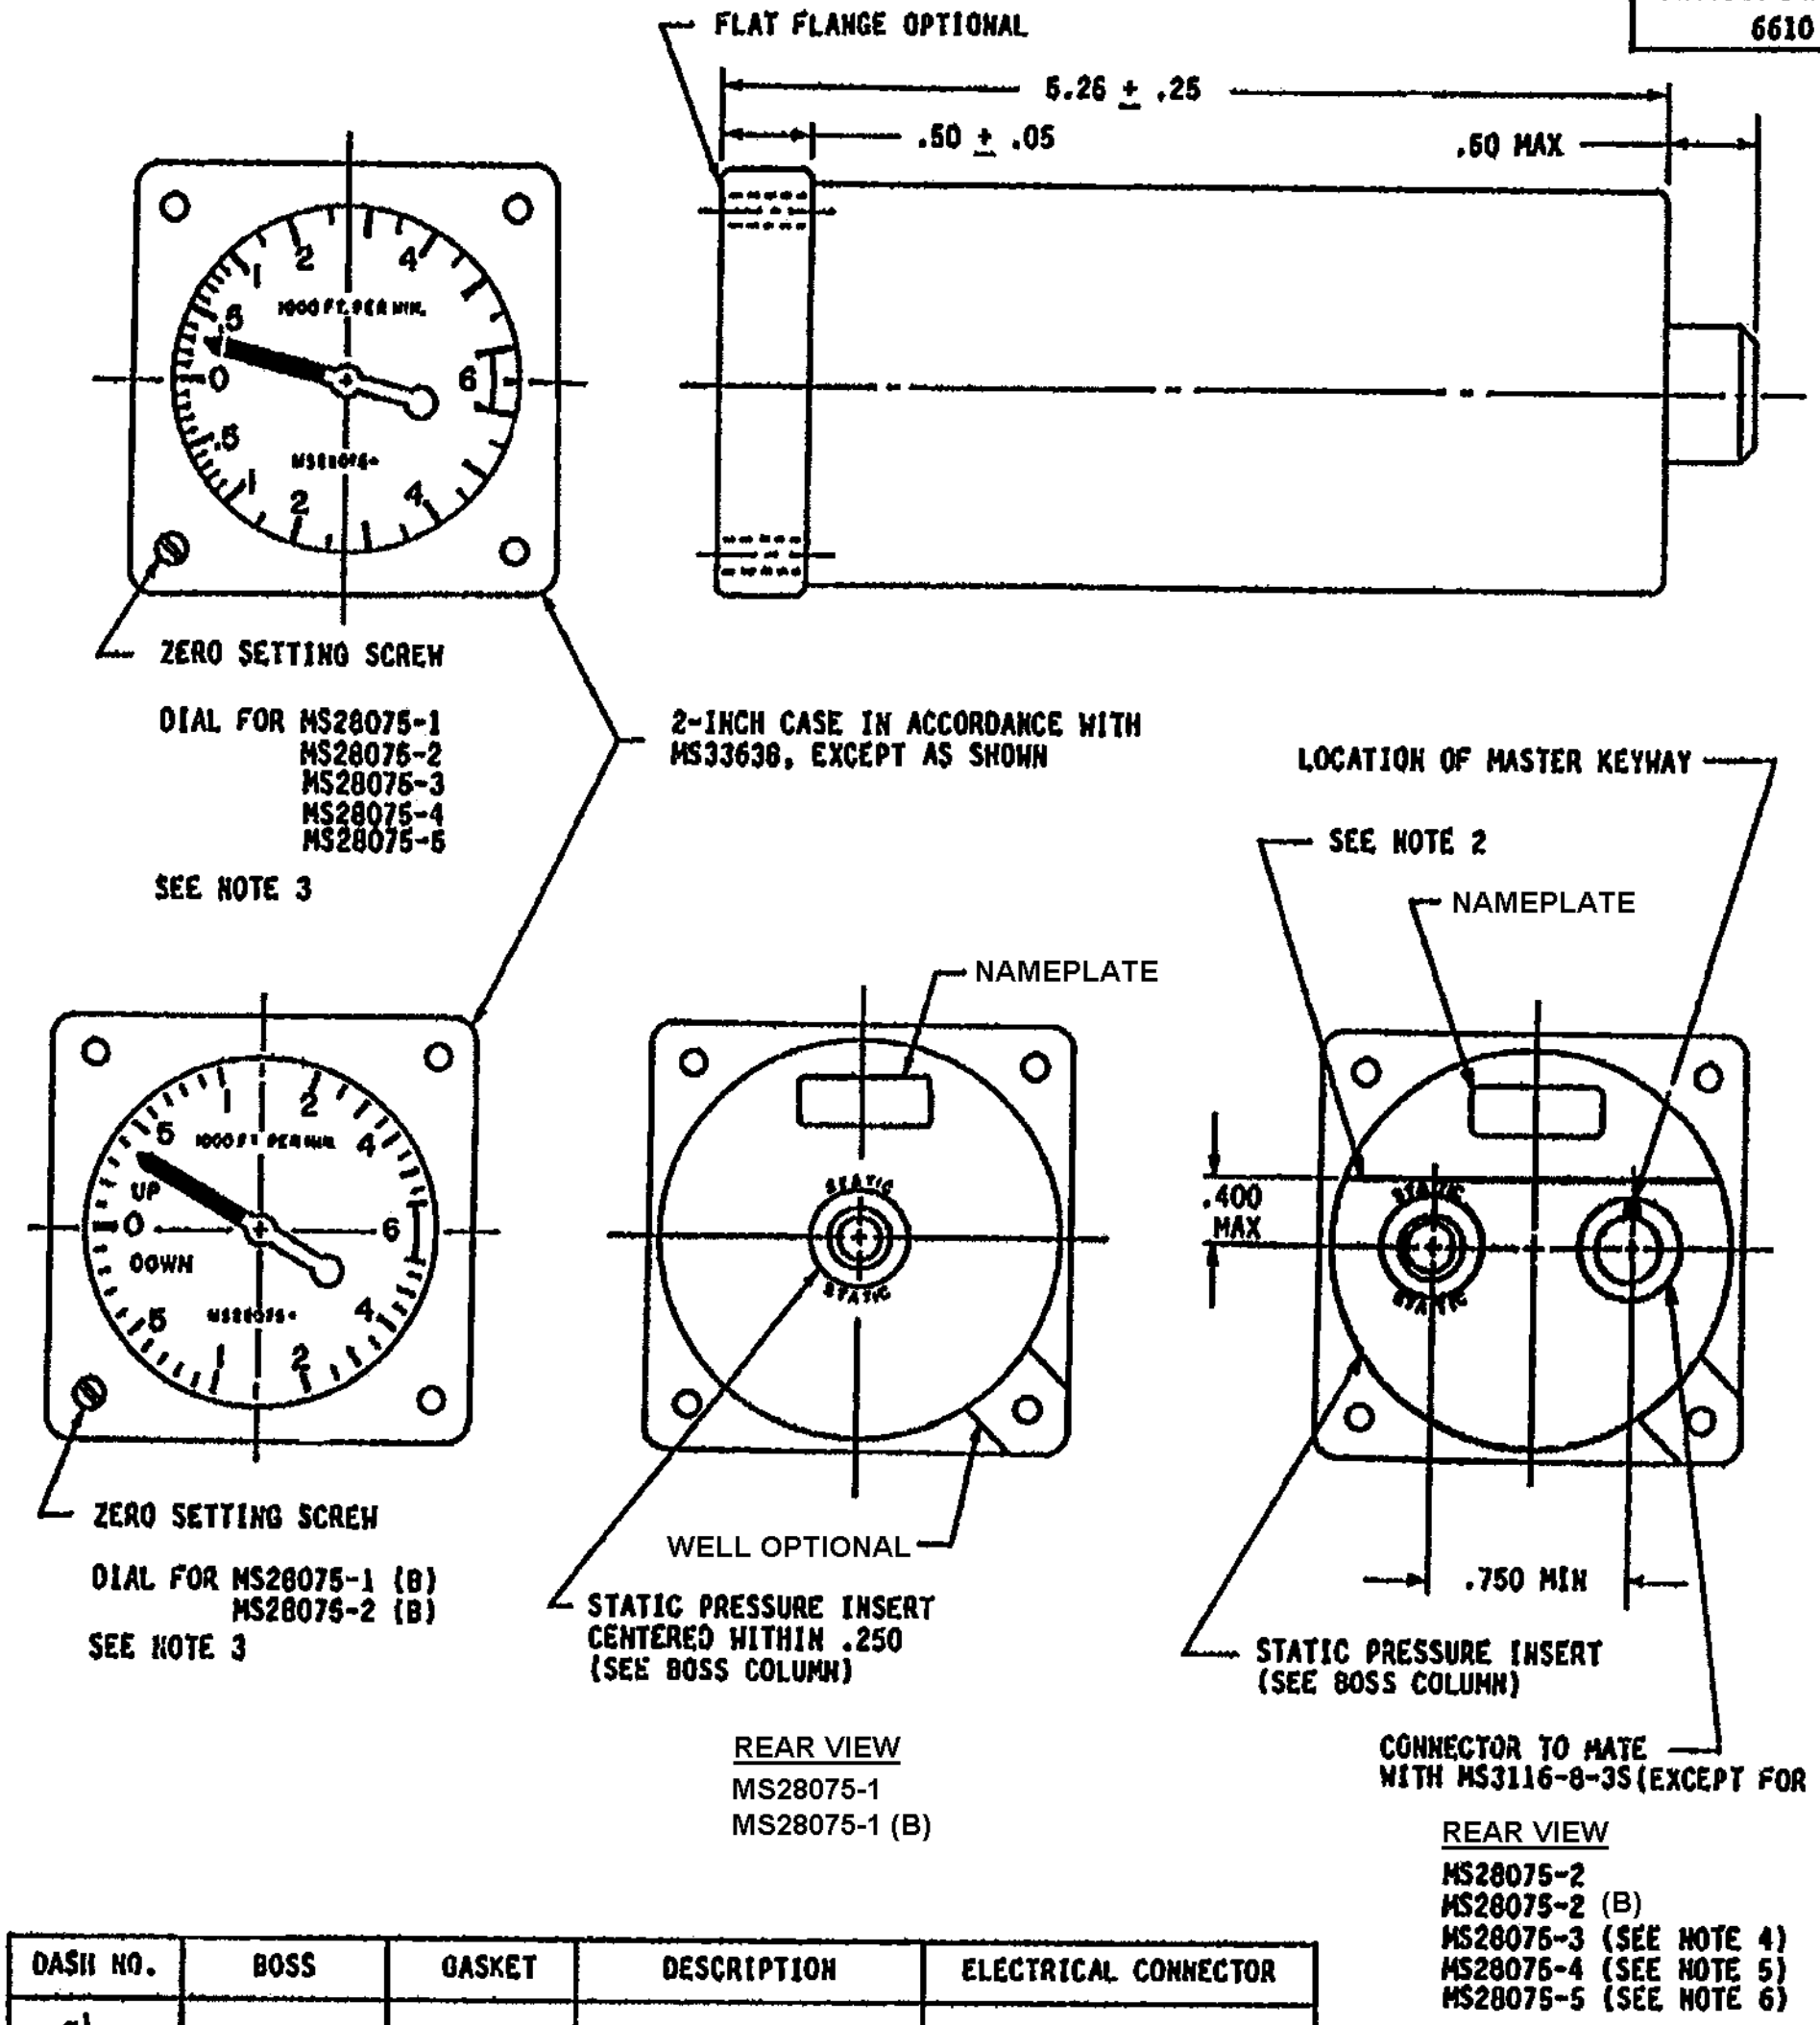

FLAT FLANGE OPTIONAL

5.26 ± .25

.50 ± .05

.60 MAX

ZERO SETTING SCREW

DIAL FOR MS28075-1
MS28075-2
MS28075-3
MS28075-4
MS28075-5

SEE NOTE 3

2-INCH CASE IN ACCORDANCE WITH MS33638, EXCEPT AS SHOWN

LOCATION OF MASTER KEYWAY

SEE NOTE 2

NAMEPLATE

NAMEPLATE

.400 MAX

ZERO SETTING SCREW

DIAL FOR MS28075-1 (B)
MS28075-2 (B)

SEE NOTE 3

WELL OPTIONAL

STATIC PRESSURE INSERT CENTERED WITHIN .250 (SEE BOSS COLUMN)

.750 MIN

STATIC PRESSURE INSERT (SEE BOSS COLUMN)

CONNECTOR TO MATE WITH MS3116-8-3S (EXCEPT FOR -3)

REAR VIEW
MS28075-1
MS28075-1 (B)

REAR VIEW
MS28075-2
MS28075-2 (B)
MS28075-3 (SEE NOTE 4)
MS28075-4 (SEE NOTE 5)
MS28075-5 (SEE NOTE 6)

DASH NO.	BOSS	GASKET	DESCRIPTION	ELECTRICAL CONNECTOR
-1 -1(B)	AND10050-4	MS28778-4	UNLIGHTED	NONE
-2 -2(B)	AND10050-4	MS28778-4	LIGHTED (5 VOLTS AC OR DC, 3 WATT)	A 5V COMMON B 5V AC OR DC (BLU-WHT) C 5V AC OR DC (RED)
-3	AND10050-4	MS28778-4	LIGHTED (5 VOLTS AC OR DC, 3 WATT)	A 5V AC OR DC (RED) B OPEN (NOTE 4) C 5V COMMON
-4	AND10050-4	MS28778-4	LIGHTED (5 VOLTS AC OR DC, 3 WATT)	A 5V COMMON B 5V AC OR DC (IPL-WHT) C 5V AC OR DC (RED)
-5	AND10050-4	MS28778-4	LIGHTED (5 VOLTS AC OR DC, 3 WATT)	A 5V COMMON B 5V AC OR DC (NVIS CLASS B GRN A) C OPEN

Ⓒ REVISED AND REDRAWN

REVISED Ⓒ 9 NOV 1987

APPROVED 24 OCT 56

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS UNLIMITED.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

P.A. NAVY — AS Other Cust ARMY - AV AIR FORCE - 11 NAVY - AS	TITLE INDICATOR, VERTICAL SPEED, 0-6000 FPM 2-INCH	MILITARY STANDARD MS28075	
PROCUREMENT SPECIFICATION MIL-I-18804	SUPERSEDES: BUAER DRAWING NO. 55A94A1	SHEET 1	OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

SYSTEMS ENGINEERING
AND STANDARDIZATION
DEPARTMENT, NAVAL AIR
ENGINEERING CENTER
LAKEHURST, NEW JERSEY 08733

DATE

DRAWN BY

TYPED BY

CHECKED BY

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 5/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T19:57Z
Check the source to verify that this is the current version before use.

851994

FED. SUP CLASS
6610

USER SYMBOLS:

REVIEWER SYMBOLS:

*Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

NOTES:

1. DIMENSIONS IN INCHES.

2. LOCATION OF FITTINGS OPTIONAL IN SHADED AREA EXCEPT A MINIMUM SPACING OF .750 INCH IS REQUIRED.

3. DIAL AND POINTER SHOWN FOR REFERENCE ONLY. SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.

4. -3 SAME AS GRUMMAN SPECIFICATION CONTROL DWG. 128SCAV-108-1 CONNECTOR MATES WITH AMPHENOL 67-06P12-60S.

5. -4 SAME AS MCDONNELL SPECIFICATION CONTROL DWG. 74J808056; BACK OF THE MOUNTING FLANGE AND ONE INCH OF THE CASE ARE TIN PLATED.

6. -5 SAME AS -4 EXCEPT FOR LIGHTING.

IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 24 OCT 56 REVISED Ⓒ FOR CHANGES SEE SHEET 1 AND 2

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

P.A. NAVY — AS Other Cust ARMY - AV AIR FORCE - 11 NAVY - AS	TITLE INDICATOR, VERTICAL SPEED, 0-6000 FPM 2-INCH	MILITARY STANDARD MS28075
PROCUREMENT SPECIFICATION MIL-I-18804	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

SYSTEMS ENGINEERING AND STANDARDIZATION DEPARTMENT, NAVAL AIR ENGINEERING CENTER
LAKEHURST, NEW JERSEY 08733

DATE

DRAWN BY

TYPED BY

CHECKED BY

NOTES TO PRINTER REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.

851904