
FED. SUP CLASS
2915

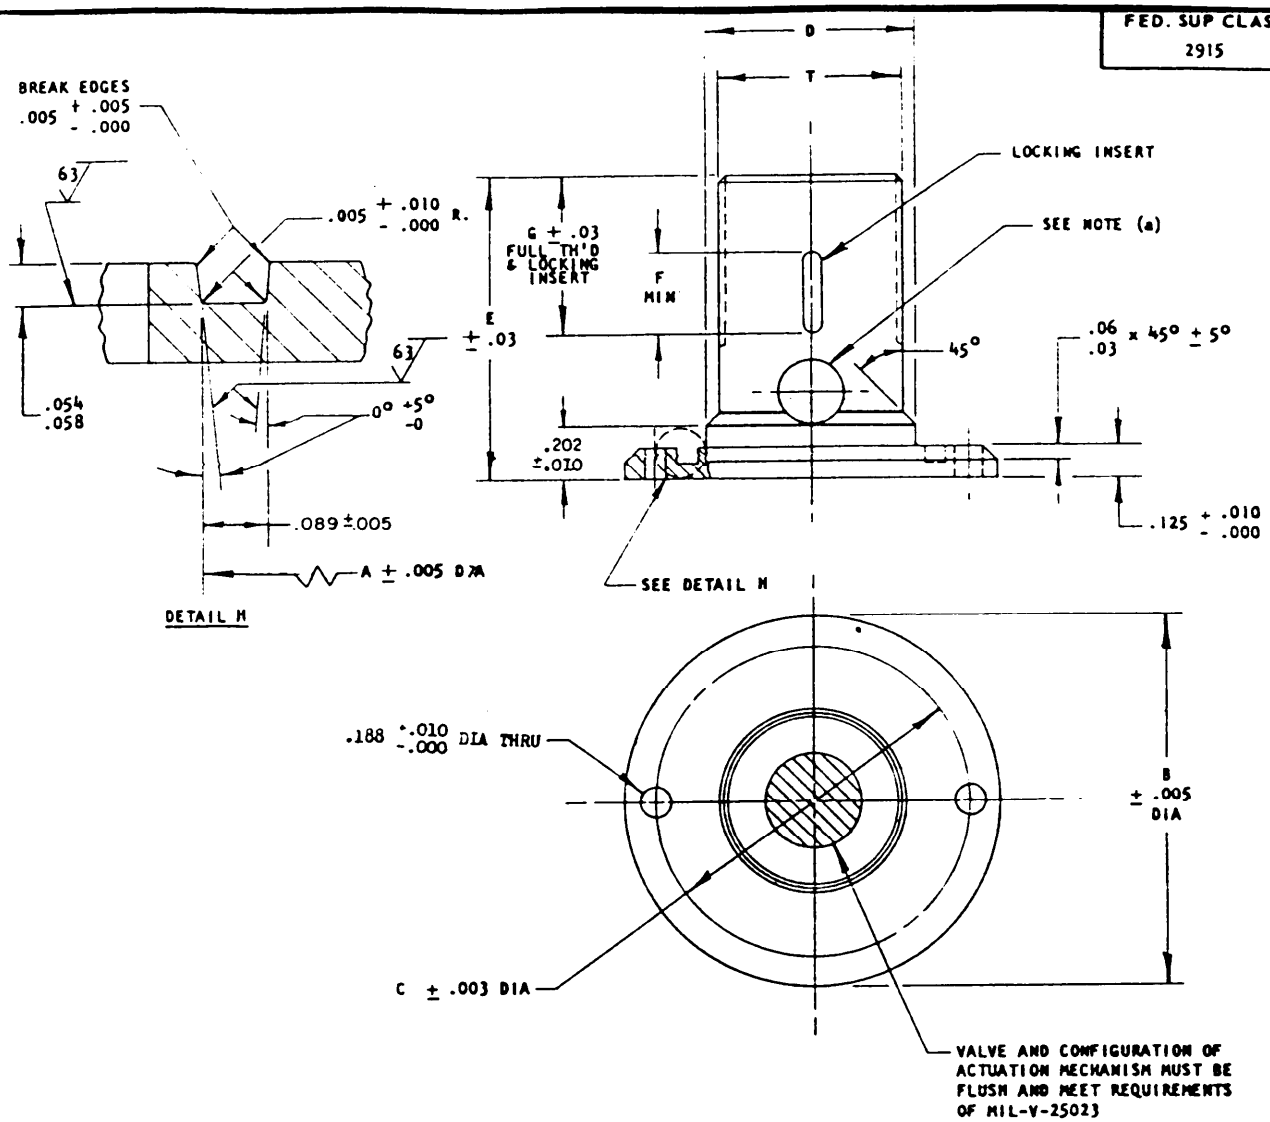

DASH NO.	THREAD T PER MIL-S-8879	A (C)	B (C)	C (C)	D ±.005	E	F	G
MS 29571-1	.7500-16UNJF-3A	1.061	1.562	1.281	.798	1.23	.38	.70
MS 29571-2	1.0625-12UNJF-3A	1.374	1.874	1.593	1.110	1.96	.60	1.20
MS 29571-3	1.3125-12UNJF-3A	1.624	2.124	1.843	1.360	2.27	.60	1.30
MS 29571-4	1.6250-12UNJF-3A	1.874	2.375	2.093	(b)	2.27	.60	1.30

(a) CONFIGURATION AND NUMBER OF INLET PORTS IN VALVE OPTIONAL EXCEPT THAT THE VALVE SHALL MEET THE REQUIREMENTS OF MIL-V-25023 WHEN TANK MOUNTED USING MAX AND MIN TANK WALL THICKNESS, AS NOTED ON MS 27262.

(b) DIMENSION T CONTROLS

(c) DIAMETERS ARE TO BE CONCENTRIC WITHIN .006 T.I.R.

MATERIAL: SEE PROCUREMENT SPECIFICATION.

SURFACE TEXTURE: ANSI B46.1-1962.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

REMOVE BURRS AND BREAK SHARP EDGES. CHAMFER ALL HOLES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 17 Aug 67 REVISED (A) 8 Jul 69 (B) 28 Sept 70 (C) 16 Sept 71

User activities:

Review activities: USAF - 82
Army -
Navy -

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 11 Other Cust Army - AV Navy - AS	TITLE VALVE, FUEL DRAIN, SELF-LOCKING, FLUSH TYPE	MILITARY STANDARD MS 29571
PROCUREMENT SPECIFICATION MIL-V-25023	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.