
FED. SUP CLASS
2915

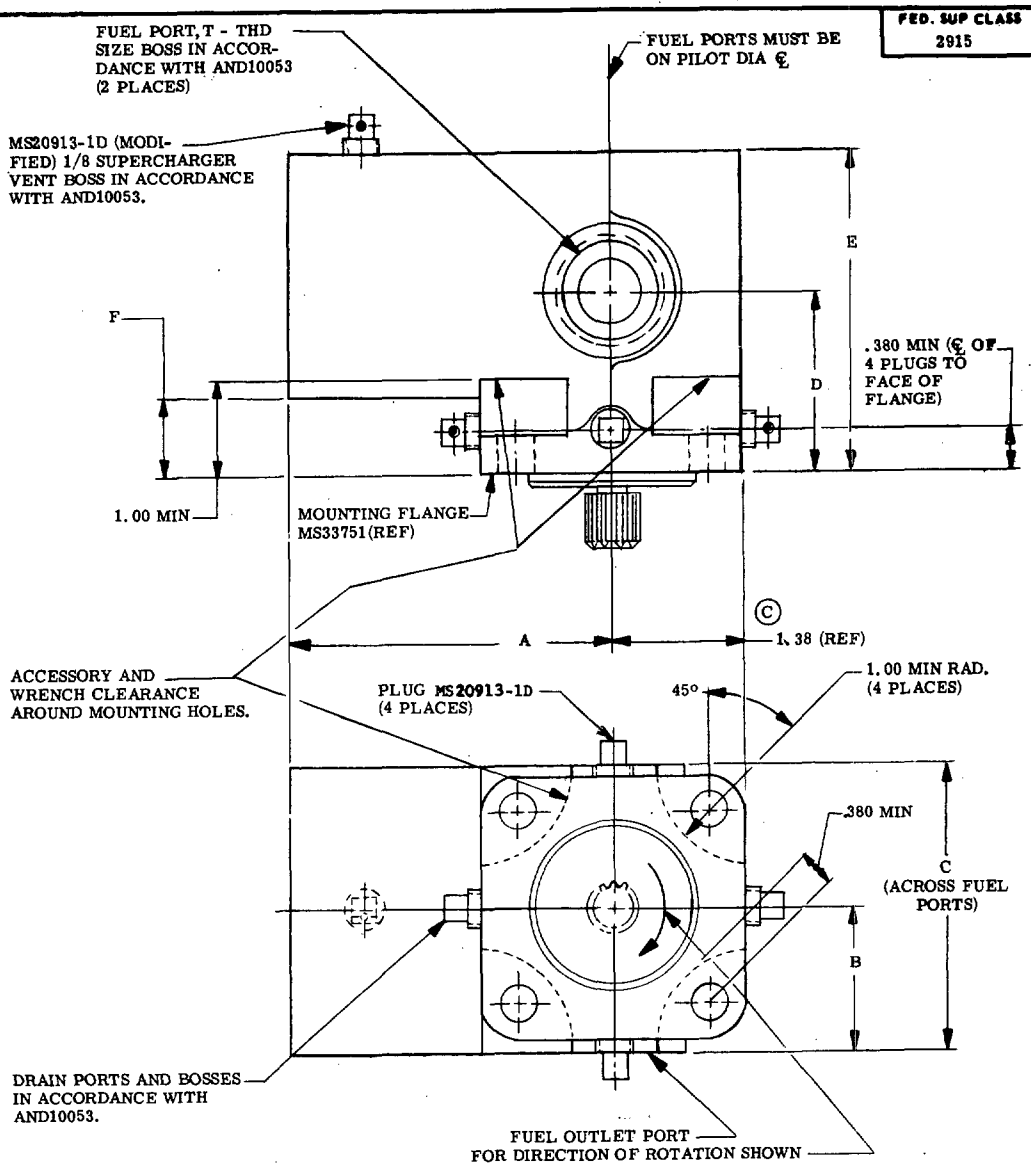

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO PLACE DECIMALS ±.02, ANGLES ±0°30'.
2. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
3. ROTATION: COUNTERCLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END.
4. THREADS IN ACCORDANCE WITH HANDBOOK H28. Ⓒ

REQUIREMENTS

1. THE PUMP SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE OF 0 CC TO 2 CC PER HOUR FROM THE ENGINE ACCESSORY DRIVE.
2. NORMAL RATED SPEED SHALL BE 2500 RPM.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓒ REVISED

APPROVED 22 JAN 1962 REVISED Ⓑ 2 AUG 1965 Ⓒ 1 JUN 71

P.A. NAVY - AS Other Cust ARMY - AV USAF - 82	TITLE PUMP, ROTARY, POWER DRIVEN, FUEL, AIRCRAFT (TAPER THREADED PORTS)	MILITARY STANDARD MS 29584 THRU 29587
PROCUREMENT SPECIFICATION MIL-P-25030	SUPERSEDES: SEE TABLE I	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

REVIEWER SYMBOLS: ARMY - AV, USAF - 82, NAVY - AS

USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
ARMY - AV
USAF - 82
NAVY - AS

USER SYMBOLS:

TABLE I

DASH NO.	PUMP SIZE	A (MAX)	B	C	D	E (MAX)	F (MIN)	T-THD	WGT (MAX LB)	PRESS. ADJ. RANGE	SUPERSEDES
MS29584-1	100 GPH	4.75	1.36	2.72 ±.03	1.90	3.35	.750	1/2 NPTF	2.1	3 - 20 PSI	———
MS29585-1	200 GPH	3.62	1.44	2.88 ±.03	2.00	3.50	.750	3/4 NPTF	3.0	3 - 20 PSI	AN4100
MS29585-2										5 - 25 PSI	
MS29586-1	400 GPH	4.12	1.62	3.25 ±.03	2.19	3.75	.750	3/4 NPTF	4.0	5 - 25 PSI	AN4101
MS29587-1	700 GPH	4.50	1.81 ±.06	3.62 ±.12	2.31	4.12	.750	1 NPTF	5.0	5 - 30 PSI	AN4102

DD FORM 1 SEP 67 672-1 (Coordinated)

P.A. NAVY - AS
Other Cust
ARMY - AV
USAF - 82

PROCUREMENT SPECIFICATION
MIL-P-25030

SUPERSEDES:
SEE TABLE I

TITLE
PUMP, ROTARY POWER DRIVEN, FUEL, AIRCRAFT (TAPER THREADED PORTS)

MILITARY STANDARD

MS 29584 THRU 29587

SHEET 2

FED. SUP CLASS 2915

APPROVED 2 AUG 1965 REVISED (C) FOR CHANGES SEE SHT 1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15920

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.