

FED. SUP CLASS
5220

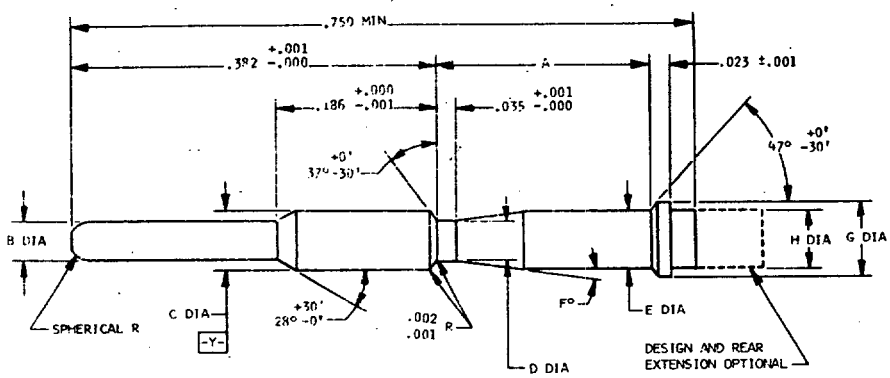

DASH NUMBER	A +.001 -.000	B +.0005	C +.0002 -.0000	D +.0000 -.0002	E +.0002 -.0000	F +30' -0'	G +.0005	H ±.001
-23A	.249	.0270	.0490	.0390	.0520	7°	.0630	.049
-20A	.254	.0405	.0760	.0655	.0780	10°	.1010	.077
-16A	.254	.0625	.1100	.0990	.1010	10°	.1310	.102
-12A	.254	.0945	.1580	.1450	.1480	10°	.1880	.156

FIGURE I
GAGE FOR PIN LOCATION AND RETENTION FEATURE TEST
SERIES 1 AND 2 CONNECTORS ONLY

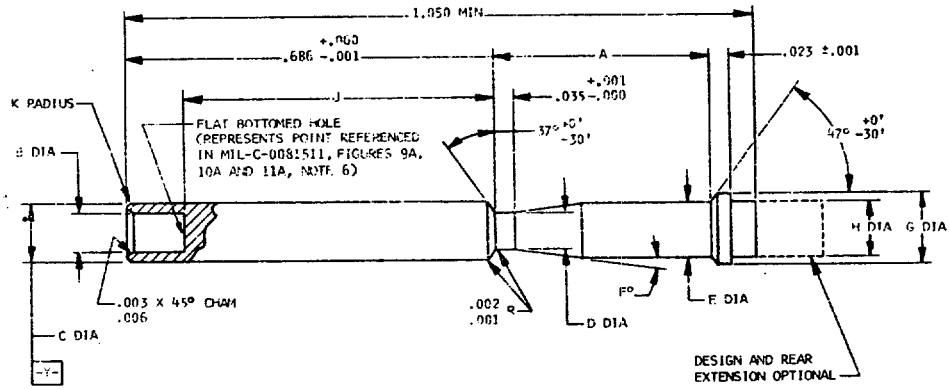

DASH NUMBER	A +.001 -.000	B ±.0005	C +.0002 -.0000	D +.0000 -.0002	E +.0002 -.0000	F +30' -0'	G ±.0005	H ±.001	J +.001 -.000	K ±.001
-23B	.249	.0295	.0490	.0390	.0520	7°	.0630	.049	.636	.005
-20B	.254	.0425	.0760	.0650	.0780	10°	.1010	.077	.629	.008
-16B	.254	.0655	.1100	.0990	.1010	10°	.1310	.102	.624	.011
-12C	.254	.0975	.1580	.1450	.1480	10°	.1880	.156	.624	.016

FIGURE II
GAGE FOR SOCKET LOCATION AND RETENTION FEATURE TEST
SERIES 1 CONNECTORS ONLY

NOTES: SEE SHEET 2

Reviewer symbols:
Navy – EC

APPROVED 18 OCT 71 REVISED


This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy – AS Other Cust	TITLE TEST GAGE, CONTACT LOCATION AND RETENTION FEATURE, MIL-C-0081511 SERIES 1 AND 2 CONNECTORS	MILITARY STANDARD MS 3434 (NAVY)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM SEP 67 672-1 N — LIMITED COORDINATION — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — PROJECT NO. 5220-N129

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

Reviewer symbols:
Navy – EC

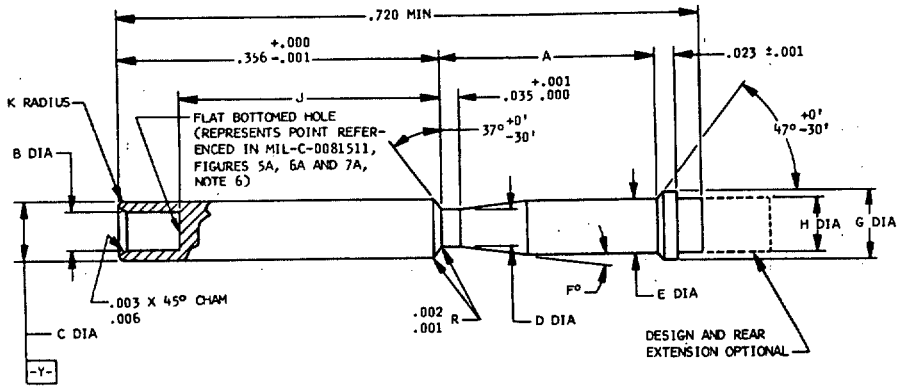

DASH NUMBER	A +.001 -.000	B ±.0005	C +.0002 -.0000	D +.0000 -.0002	E +.0002 -.0000	F +30' -0'	G ±.0005	H ±.001	J +.001 -.000	K ±.001
-23C	.249	.0295	.0490	.0390	.0520	7°	.0630	.040	.306	.005
-20C	.254	.0425	.0760	.0650	.0780	10°	.1018	.077	.299	.008
-16C	.254	.0655	.1100	.0990	.1010	10°	.1310	.102	.294	.011
-12C	.254	.0975	.1580	.1450	.1480	10°	.1880	.156	.294	.016

FIGURE III
GAGE FOR SOCKET LOCATION AND RETENTION FEATURE TEST
SERIES 2 CONNECTORS ONLY

5. PART NUMBER EXAMPLE: MS[illegible]-20A
   BASIC PART NUMBER — DASH NUMBER (CORRESPONDS TO CAVITY SIZE)
4. ALL DIAMETERS TO BE CONCENTRIC TO -Y- WITHIN .002 TIR.
3. DIMENSIONS IN INCHES UNLESS OTHERWIS SPECIFIED.
2. SURFACE ROUGHNESS: 32 MICROINCH OR BETTER.
1. MATERIAL: STEEL.

NOTES:

APPROVED 18 OCT 71 REVISED

This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy – AS Other Cust	TITLE TEST GAGE, CONTACT LOCATION AND RETENTION FEATURE, MIL-C-0081511 SERIES 1 AND 2 CONNECTORS	MILITARY STANDARD MS 3434 (NAVY)
PROCUREMENT SPECIFICATION	SUPERSEDES: --	SHEET 2

DD FORM 672-1 N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1974—603-109/1490

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.