
FED. SUP CLASS
5315

User activities:
ARMY -AT, EL
NAVY - OS, SH
AIR FORCE

Review activities:
ARMY - AV, EA, MI
NAVY -
AIR FORCE - NS
DLA - IS

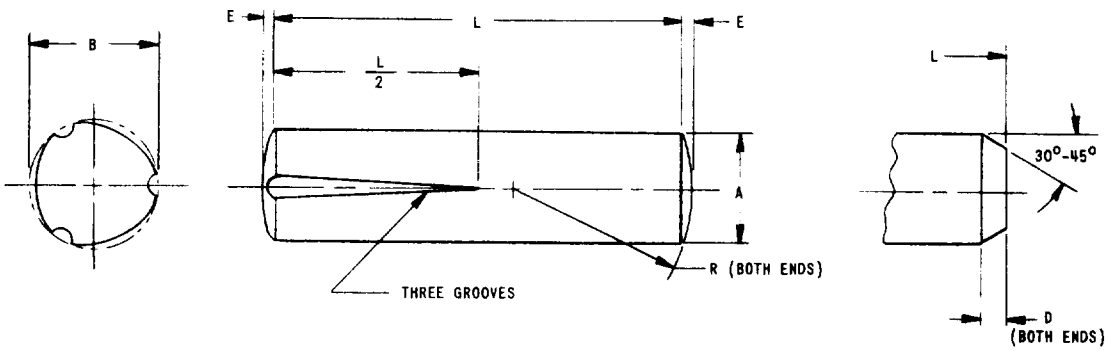

NOTES:

1. MATERIAL: CORROSION-RESISTING STEEL, 300 SERIES (AUSTENITIC STEEL) FED-STD-66. MINIMUM ULTIMATE SHEAR STRENGTH, 90,000 PSI.
2. PROTECTIVE FINISH: PASSIVATED IN ACCORDANCE WITH QQ-P-35.
3. DIMENSIONS ARE IN INCHES.
4. DIAMETER "B" IS THE EXPANDED DIAMETER AS MEASURED WITH A GO AND NOT GO RING GAGE MADE TO Z TOLERANCES.
5. MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS51605-1.
6. THIS ITEM SERVES AS A DOWEL PIN IN APPLICATIONS WITH A THRU HOLE.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 27 SEP 65 REVISED (A) 14 OCT 66 (B) 15 MAY 78

(B) ENTIRE STANDARD REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AR	TITLE	MILITARY STANDARD
Other Cust AS 99	PIN, GROOVED, HEADLESS (HALF LENGTH TAPER GROOVE) CORROSION-RESISTING STEEL	MS 51605
PROCUREMENT SPECIFICATION MIL-P-20700	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

User activities:
ARMY - AT, EL
NAVY - OS, SH
AIR FORCE -

Review activities:
ARMY - AV, EA, MI
NAVY -
AIR FORCE - NS
DLA - IS

A DIAMETER		.0469 +.0000 -.0010		.0625 +.0000 -.0010		.0781 +.0000 -.0010		.0938 +.0000 -.0010		.1250 +.0000 -.0020	
D CHAMFER LENGTH 1/	MIN	---		.016		.016		.016		.016	
E CROWN HEIGHT 1/	REF	---		.0065		.0087		.0091		.0130	
R RADIUS	+.010	---		.078		.094		.125		.156	
RECOMMENDED HOLE SIZE DRIVE FIT	MAX	.0482		.0640		.0798		.0956		.1271	
	MIN	.0469		.0625		.0781		.0938		.1250	
SINGLE SHEAR STRENGTH	LBS-MIN	150		270		430		620		1100	
L LENGTH	+.010	DASH NO.	B DIA +.001	DASH NO.	B DIA +.001	DASH NO.	B DIA +.001	DASH NO.	B DIA +.001	DASH NO.	B DIA +.002
.500		-1	.050	-3	.066	-8	.082	-13	.099	-19	.132
.625		-2	.050	-4	.066	-9	.082	-14	.099	-20	.132
.750				-5	.066	-10	.082	-15	.099	-21	.132
.875				-6	.066	-11	.082	-16	.099	-22	.132
1.000				-7	.066	-12	.082	-17	.099	-23	.132
1.250								-18	.099	-24	.132
1.500										-25	.132

A DIAMETER		.1563 +.0000 -.0020		.1875 +.0000 -.0020		.2188 +.0000 -.0020		.2500 +.0000 -.0020	
D CHAMFER LENGTH 1/	MIN	.031		.031		.031		.031	
E CROWN HEIGHT 1/	REF	.0170		.0180		.0220		.0260	
R RADIUS	+.010	.188		.250		.281		.312	
RECOMMENDED HOLE SIZE DRIVE FIT	MAX	.1587		.1903		.2219		.2534	
	MIN	.1563		.1875		.2188		.2500	
SINGLE SHEAR STRENGTH	LBS-MIN	1720		2480		3380		4420	
L LENGTH	+.010	DASH NO.	B DIA ±.002	DASH NO.	B DIA +.002	DASH NO.	B DIA +.002	DASH NO.	B DIA +.002
.500		-26	.164	-33	.195	-40	.227	-47	.260
.625		-27	.164	-34	.195	-41	.227	-48	.260
.750		-28	.164	-35	.195	-42	.227	-49	.260
.875		-29	.164	-36	.195	-43	.227	-50	.260
1.000		-30	.164	-37	.195	-44	.227	-51	.260
1.250		-31	.164	-38	.195	-45	.227	-52	.260
1.500		-32	.164	-39	.195	-46	.227	-53	.260

1/ ENDS MAY BE CROWNED OR CHAMFERED OR MAY BE SQUARE WITH .01 TO .02 RADIUS ON THE EDGES.

APPROVED 27 SEP 65 REVISED (B) FOR CHANGES SEE SHEET 1

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	AR	TITLE	MILITARY STANDARD
Other Cust	AS 99	PIN, GROOVED, HEADLESS (HALF LENGTH TAPER GROOVE) CORROSION-RESISTING STEEL	MS 51605
PROCUREMENT SPECIFICATION MIL-P-20700		SUPERSEDES	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.