FED. SUP CLASS
9510

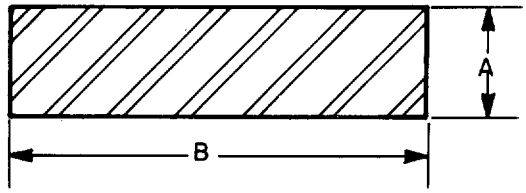


TABLE I. DASH NUMBERS

DASH NO	A	B	SUFFIX 1/	GRADE 2/
001	.188	2.500	10	A
003	.188	3.000	10	A
005	.188	3.500	10	A
007	.188	6.000	10	A
009	.250	.500	10	A
011	.250	1.500	12	C
013	.312	.500	10	A
015	.375	.500	10	A
017	.375	2.000	10	A
019	.500	1.000	12	C
021	.500	1.250	10	A
023	.500	1.500	10	A
025	.500	2.000	10	A
027	.500	2.500	12	A
029	.500	4.500	12	A
031	.625	2.000	9	A
033	.750	2.500	12	A
035	.750	3.500	8	A
037	1.000	2.000	9	C
039	1.000	2.500	12	A
041	1.000	3.000	9	A
043	1.250	4.000	9	C
045	1.500	6.000	9	C

1/ SEE REQT 2
2/ SEE REQT 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
ARMY-AR,EA,MI
AIR FORCE-84
DLA-IS

APPROVED 31 JUL 85 REVISED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
MR		BAR, FLAT, TOOL STEEL, TYPE W1	MS52081
Other Cust 99			
PROCUREMENT SPECIFICATION: ASTM-A686	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9510-0504

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:19Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9510

REQUIREMENTS:

1. MATERIAL. TOOL STEEL TYPE W1 (UNS T72301), AS SPECIFIED IN PROCUREMENT DOCUMENT.

2. CONDITION.

SUFFIX	CARBON RANGE OF
8	.8 - .9
9	.9 - 1.0
10	1.0 - 1.1
12	1.2 - 1.3

GRADE A IS REFERRED TO AS EXTRA OR SPECIAL; THE CHEMICAL COMPOSITION IS HELD TO CLOSEST LIMITS FOR CONTROLLED HARDENABILITY - REGULAR HARDENING.

GRADE C IS REFERRED TO AS REGULAR OR STANDARD; IT IS INTENDED FOR APPLICATIONS THAT DO NOT REQUIRE CONTROLLED HARDENABILITY AND WHERE SOME LATITUDE IN UNIFORMITY IS PERMISSIBLE.

3. LENGTH. STANDARD LENGTH OF FLAT BAR IS 10 FEET MINIMUM, 12 FEET MAXIMUM.

4. FORMING PROCESS. HOT FORMED.

5. FINISH. AS SPECIFIED IN PROCUREMENT DOCUMENT.

6. HEAT TREATMENT. ANNEALED.

7. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS52081-001
- 001 — DASH NUMBER FROM TABLE I
- MS52081 — BASIC MS NUMBER

8. MARKING. TOOL STEEL SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 31 JUL 85 REVISED

USER ACTIVITIES:

REVIEWER ACTIVITIES:
ARMY-AR,EA,MI
AIR FORCE-84
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
MR		BAR, FLAT, TOOL STEEL, TYPE W1	MS52081
Other Cust 99			
PROCUREMENT SPECIFICATION ASTM-A686	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9510-0504

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:19Z
Check the source to verify that this is the current version before use.