
FED. SUP CLASS
6680

PREFERRED CONSTRUCTION

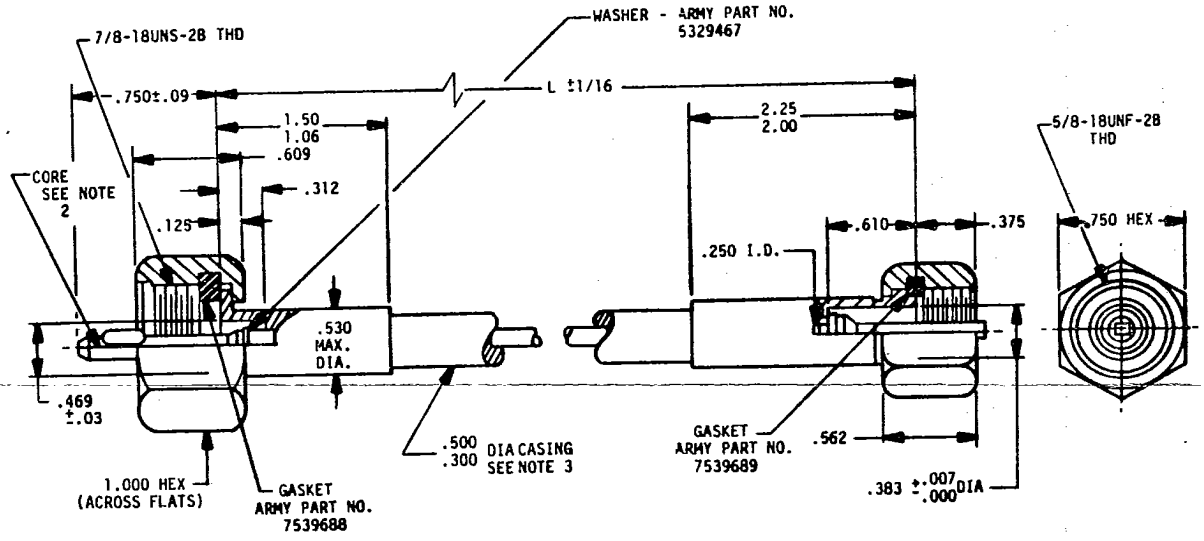

MS PART No.	SHAFT LENGTH (L)
MS52116 - 1	17 - 1/2
- 2	22 - 1/2
- 3	40
- 4	55
- 5	62 - 1/2
- 7	67 - 1/2
- 8	72 - 1/2
- 9	77 - 1/2
- 10	85
- 11	90
- 12	95
- 13	100
- 14	107 - 1/2
- 15	144
- 16	156
- 17	168
- 18	216
- 19	120
- 20	138

Ⓐ ENTIRE STANDARD REVISED

P. A. ARMY-AT Other Cust AF-99	INTERNATIONAL INTEREST	TITLE SHAFT ASSEMBLY: FLEXIBLE, PLASTIC, TACHOMETER, AND SPEEDOMETER	MILITARY STANDARD MS52116
PROCUREMENT SPECIFICATION MIL-S-10215	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6680-0207

APPROVED 18 FEBRUARY 1971 REVISED Ⓐ 19 JANUARY 1988

USER ACTIVITIES: ARMY-ME, NAVY-NC

REVIEWER ACTIVITIES: DLA-GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.
AMSC N/A


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES: ARMY-ME, NAVY-MC
REVIEWER ACTIVITIES DLA-GS
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.
AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
6680

OPTIONAL CONSTRUCTION

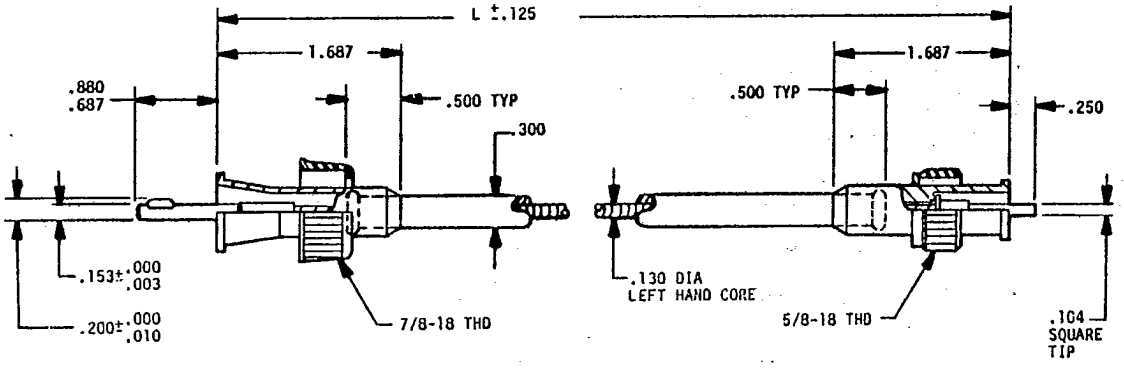

MS PART No.	SHAFT LENGTH (L)	MS PART No.	SHAFT LENGTH (L)
MS52116 - 21	72	MS52116 - 31	192
- 22	84	- 32	204
- 23	96	- 33	216
- 24	108	- 34	228
- 25	120	- 35	240
- 26	132	- 36	252
- 27	144	- 37	264
- 28	156	- 38	276
- 29	168	- 39	288
- 30	180	- 40	300

NOTES:

1. TYPE 1, GROUP A AND B, CLASS 9, (SHAFT ASSEMBLY, FLEXIBLE PLASTIC) OF PROCUREMENT SPECIFICATION.
2. ASSOCIATED CORES SHALL CONFORM TO MS51072.
3. CASING SHALL BE PLASTIC (ASTM STD D4066-85 OR EQUAL) REINFORCED WITH STEEL WIRE WITH PERFORMANCE IN ACCORDANCE WITH REQUIREMENTS OF PROCUREMENT SPECIFICATION.
4. FOR ASSOCIATED ADAPTERS, SEE MS39130, MS39132, AND MS53099.
5. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
6. FOR INFORMATION OTHER THAN SHOWN HEREON, SEE PROCUREMENT SPECIFICATION.
7. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.010 ON DECIMALS.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
10. REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 18 FEBRUARY 1971 REVISED (A) 19 JANUARY 1988

P. A. ARMY-AT Other Cust AF-99	INTERNATIONAL INTEREST	TITLE SHAFT ASSEMBLY: FLEXIBLE, PLASTIC, TACHOMETER, AND SPEEDOMETER	MILITARY STANDARD MS 52116
PROCUREMENT SPECIFICATION MIL-S-10215	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 6680-0207

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.