
FED. SUP CLASS
4730

FIGURE 1

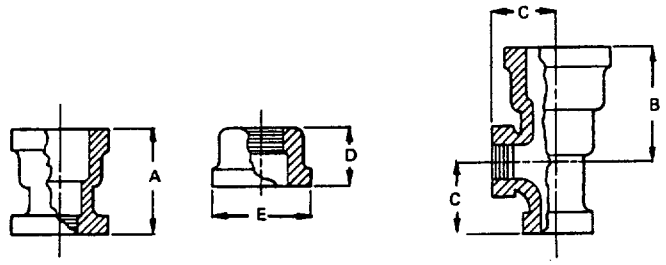

TUCKER CONNECTION ROOF CONNECTION TUCKER Y-BRANCH

(A) TABLE I. Dimensions.

Nominal Pipe Size	Length A	Center Tucker End B	Center To Threaded End C	Length D	Width E
1-1/4	3-3/4	3-15/16	2-1/4	...	...
1-1/2	4	4-1/4	2-1/2	3	2-7/8
2	4-1/2	4-11/16	3-1/16	3-13/16	2-1/2
3	4-3/4	5-3/8	4-1/4	4-15/16	3
4	7	...	...	6	3
5	7	...	...		
6	7	...	...		

(A) NOTES:

1. MATERIAL: Material shall be in accordance with ANSI B16.12.
2. COATINGS: Coatings shall be in accordance with ANSI B16.12 and shall be uncoated, coated with a bituminous composition or zinc coated as specified by the MS part number.
3. DIMENSIONS AND DESIGN:
   (a) All dimensions are in inches and shall be in accordance with ANSI B16.12.
   (b) A Tucker connection of 2 inch nominal pipe size may be made of malleable iron having a diameter to fit within a nominal 4 inch building wall.
   (c) Tucker connections of 4, 5, and 6 inch nominal pipe size are provided with loose rings to slip into hubs over wrought pipe. Other sizes may be provided with loose rings at the option of the manufacturer.
   (d) Roof connections are not made to standard dimensions except for the thread which may be either straight or tapered pipe threads as stated in ANSI B16.12.
4. THREADED ENDS: The threaded ends shall be in accordance with ANSI B16.12. All drainage fittings having openings at a 90 degree nominal angle shall be tapped with a pitch of 1/4 inch in one foot with the pitch in the direction shown in ANSI B16.12.
5. GENERAL:
   (a) The hubs on Tucker connections, roof connections, and Tucker Y-branches are designed to be used with wrought iron and steel pipe of the nominal pipe size.
   (b) Referenced documents shall be of the issue in effect on date of invitations for bid or requests for proposal.
   (c) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. PART NUMBER: The MS part number is formed by combining the MS number with a dash after it, the size code number, the fitting style letter, and the coating identification number.

(A) DENOTES CHANGES

(A) User activities: Army - CE
Navy - MC
Air Force - 99

(A) Review activities: Army -
Navy -
Air Force -
DLA-CS

APPROVED 31 October 1972 REVISED (A) 11 January 1983

P.A	International Interest	TITLE	MILITARY STANDARD
NAVY-YD Other Cust ARMY-ME (A)		Y-BRANCH, TUCKER AND ROOF CONNECTIONS, CAST-IRON THREADED DRAINAGE	MS90527
Procurement Specification ANSI B16.12 (A)		SUPERSEDES: MS90527	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-0407

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:38Z
Check the source to verify that this is the current version before use.

MS 90527 - X X X

Size code number (see note 7)
Fitting style letter (see note 8)
Coating identification number (see note 9)

7. SIZE: The nominal pipe size is designated by a digit (see table II).

TABLE II. Code Number to Size.

Code Number	Nominal Pipe Size	Code Number	Nominal Pipe Size
1	1 1/4 inch	5	4 inch
2	1 1/2 inch	6	5 inch
3	2 inch	7	6 inch
4	3 inch		

8. FITTING STYLE: The style of the fitting is designated by a single letter (see table III).

TABLE III. Code Letter to Fitting Style.

Code Letter	Fitting Style
X	Tucker connection
Y	Roof connection
Z	Tucker Y-branch

9. COATING: The type of coating is designated by a digit (see table IV).

TABLE IV. Code Number to Coating.

Code Number	Coating
1	Uncoated
2	Bituminous composition
3	Zinc coated

User activities: Army - CE
Navy - MC
Air Force - 99

Review activities: Army -
Navy -
Air Force -
DLA-CS

APPROVED 31 October 1972 REVISED (A) 11 January 1983

P.A	International interest	TITLE	MILITARY STANDARD
NAVY-YD Other Cust ARMY-ME (A)		Y-BRANCH, TUCKER AND ROOF CONNECTIONS, CAST-IRON THREADED DRAINAGE	MS90527
Procurement Specification ANSI B16.12 (A)		SUPERSEDES: MS90527	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-0407

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:38Z
Check the source to verify that this is the current version before use.