

FED SUP CLASS
5355

User activities
Army - AR
Navy - CG, MC, OS

Review activities
Army - AT, AV, ME, EA
Navy - AS, SH
DLA - IS
NS

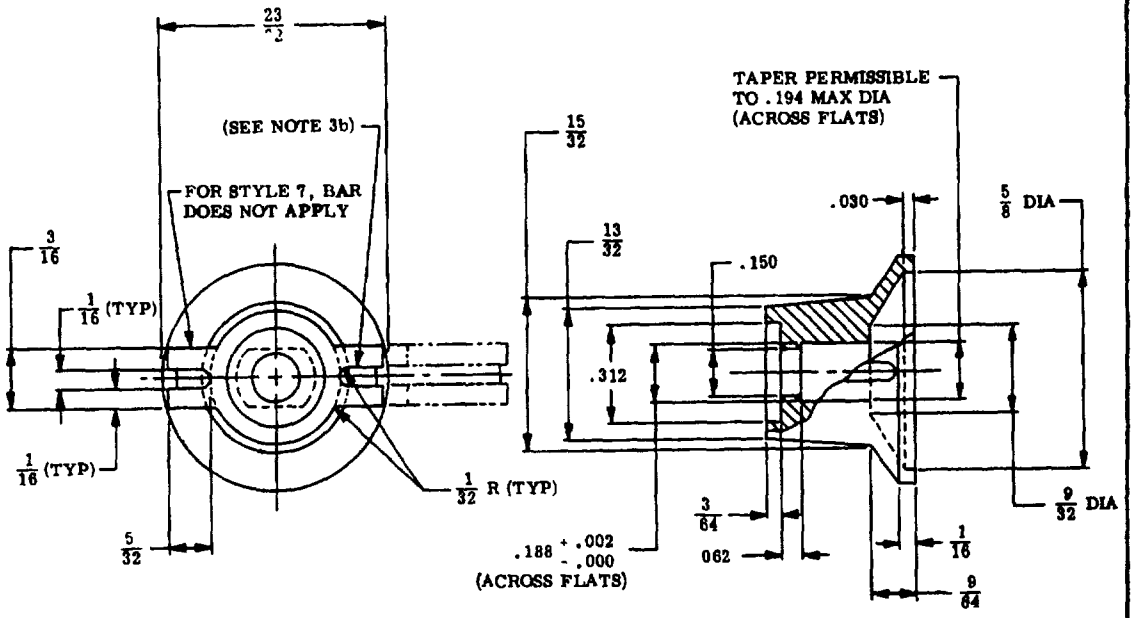

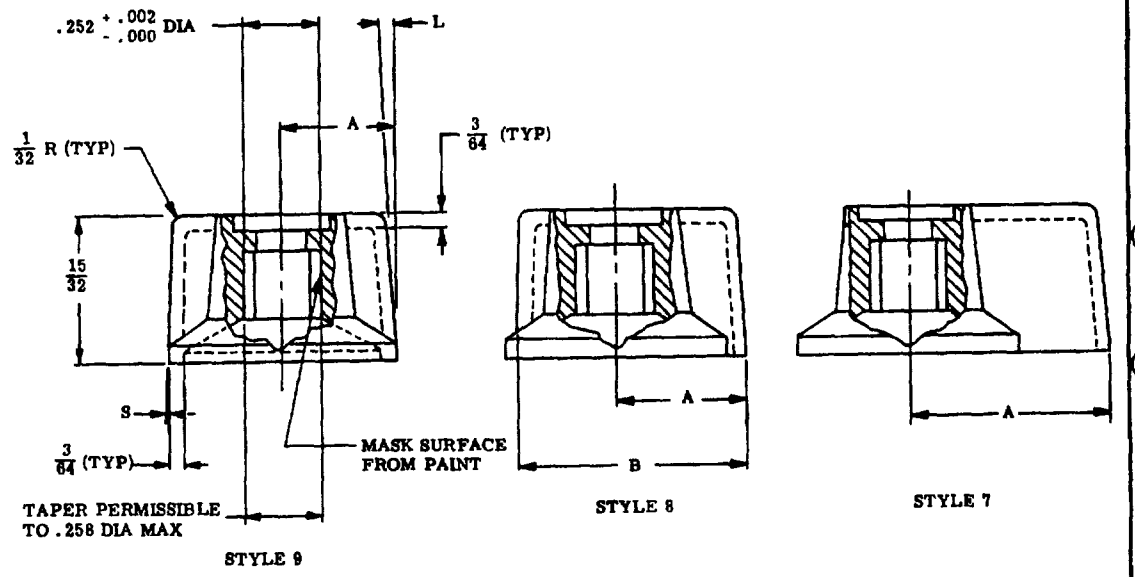

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

(E) DENOTES CHANGES

APPROVED 15 SEP 1954 REVISED (D) 21 JUN 79 (E) 14 AUGUST 1980

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

P A.	EC	TITLE	MILITARY STANDARD
Other Cust	ER	KNOBS, CONTROL SHORT BAR METAL AND PLASTIC	MS91524
	11		
PROCUREMENT SPECIFICATION MIL-K-3926		SUPERSEDES	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:42Z
Check the source to verify that this is the current version before use.

TABLE I - KNOB SIZES

MS DASH NO.	SERIES	A	B
SEE TABLE II	9	23/64	23/32
	8	27/64	23/32
	7	23/32	—

(E) INTERCHANGEABILITY (SEE NOTE 7)
CANCELLED, MS91524-1, SUPERSEDED, MS91524-9AP3TOX

TABLE II - MS DASH NUMBER

MS91524-9 AW 3 T 0 X

SERIES	STYLE	BAR ANGLE S	BAR ANGLE L	COLOR	GROOVES
	AW-ALUM KNOB, WHITE LINE				
9	AP-ALUM KNOB, PHOSPH. LINE	1=0°	R=0°	B=BLACK	SEE
8	AF-ALUM KNOB, FLUOR. LINE	2=2°	S=2°	G=GRAY	TABLE
7	PW-PLASTIC KNOB, WHITE LINE	3=4°	T=4°	O=OLIVE DRAB	III
	PP-PLASTIC KNOB, PHOSPH LINE	4=6°	U=6°		
	PF-PLASTIC KNOB, FLUOR. LINE				

TABLE III - GROOVED PARTS

Z - SHORT BAR PART ONLY
Y - LONG BAR PART ONLY
X - BOTH BAR PARTS.
W - BOTH BAR PARTS - TOP ONLY

(E) TABLE IV - INTERCHANGEABILITY 1/

MS 91524 DASH NUMBER	
CANCELLED	SUPERSEDING
-1	-9AP3TOX
-2	-9AW3TOX
-3	-9AP3TBX
-4	-9AW3TBX
-5	-9AP3TGX
-6	-9AW3TGX

1/ SEE NOTE 7

NOTES

1. MATERIAL ALUMINUM ALLOY, OR PLASTIC
2. PROTECTIVE FINISH, PER MIL-F-7179, TYPE I
3. COLOR
   a. KNOB COLOR PER FED-STD-595
      OLIVE DRAB, SEMIGLOSS #24087
      BLACK, SEMIGLOSS #27038
      GRAY, SEMIGLOSS #26231
   b. LINE (APPLY TO FINISHED KNOB)
      GREEN TO YELLOW GREEN, PHOSPHORESCENT PER MIL-L-3891, TYPE P,
      OR TT-P-54, TYPE I
      GREEN, FLUORESCENT PER MIL-L-3891, TYPE F
      WHITE, LUSTERLESS #37875 PER FED-STD-595
4. DIMENSIONS ARE IN INCHES
5. UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ±1/64, ANGLES ±1°
6. ALL REQUIREMENTS OF MIL-K-3926 APPLY WITH THE EXCEPTION OF THE FOLLOWING
   a. TORQUE TEST NOT APPLICABLE
   b. STYLE AP, AF, PP AND PF KNOBS THERMAL SHOCK TO TEST CONDITION A, METHOD 107 OF MIL-STD-202
(E) 7. EXISTING STOCK OF KNOBS MAY BE USED UNTIL DEPLETED. FOR NEW ORDERS USE ONLY KNOB DASH NUMBERS AS SHOWN IN TABLE II

User activities.
Army - AR
Navy - CG, MC, OS

Review activities:
Army - AT, AV, ME, EA
Navy - AS, SH
DLA - IS
MS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for retrofitting are shall be made from this document, when applicable.

(E) REVISED (E) FOR CHANGES SEE SHEET 1

P.A.	EC	TITLE	MILITARY STANDARD
Other Cust	ER	KNOBS, CONTROL, SHORT BAR METAL AND PLASTIC	MS91524
	11		
PROCUREMENT SPECIFICATION MIL-K-3926		SUPERSEDES	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:42Z
Check the source to verify that this is the current version before use.