
MS9375 (ASG)

FED SUP CLASS 5330

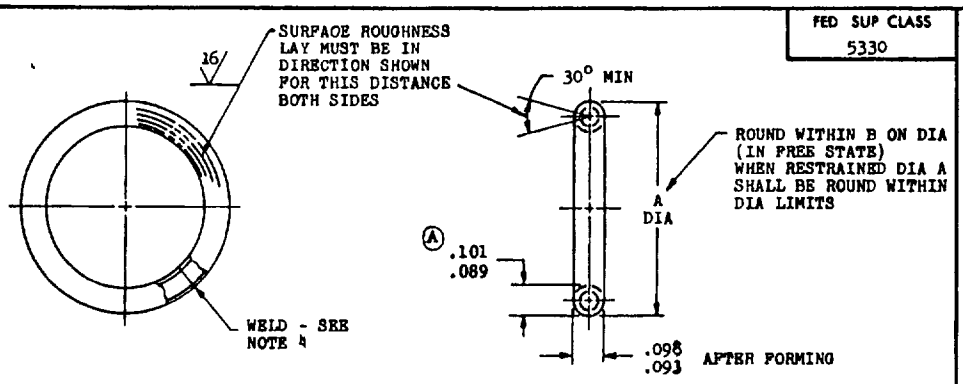

PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100	PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100	PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100
*MS9375-010	1.000	.030	.336	*MS9375-047	2.750	.060	.924	MS9375-107	6.500	.090	2.182
MS9375-012	1.031	.030	.346	MS9375-048	2.812	.060	.945	MS9375-111	6.750	.090	2.265
MS9375-013	1.062	.030	.356	MS9375-049	2.875	.060	.965	*MS9375-115	7.000	.090	2.350
MS9375-014	1.094	.030	.368	MS9375-050	2.938	.060	.987	MS9375-119	7.250	.090	2.432
*MS9375-015	1.125	.030	.378	*MS9375-051	3.000	.060	1.008	MS9375-123	7.500	.090	2.520
MS9375-016	1.156	.030	.388	MS9375-052	3.062	.060	1.028	MS9375-127	7.750	.090	2.600
MS9375-017	1.188	.030	.399	MS9375-053	3.125	.060	1.049	*MS9375-131	8.000	.090	2.690
MS9375-018	1.219	.030	.409	MS9375-054	3.188	.060	1.070	MS9375-135	8.250	.090	2.770
*MS9375-019	1.250	.030	.419	MS9375-055	3.250	.060	1.090	MS9375-139	8.500	.090	2.860
MS9375-020	1.281	.030	.431	MS9375-056	3.312	.060	1.112	MS9375-143	8.750	.090	2.940
MS9375-021	1.312	.030	.441	MS9375-057	3.375	.060	1.132	*MS9375-147	9.000	.090	3.020
MS9375-022	1.344	.030	.451	MS9375-058	3.438	.060	1.155	MS9375-151	9.250	.090	3.105
*MS9375-023	1.375	.030	.462	*MS9375-059	3.500	.060	1.175	MS9375-155	9.500	.090	3.200
MS9375-024	1.406	.030	.472	MS9375-060	3.562	.060	1.195	MS9375-159	9.750	.090	3.280
MS9375-025	1.438	.030	.484	MS9375-061	3.625	.060	1.218	*MS9375-163	10.000	.090	3.360
MS9375-026	1.469	.030	494	MS9375-062	3.688	.060	1.238	MS9375-167	10 250	125	3.440
*MS9375-027	1.500	.030	.504	MS9375-063	3.750	.060	1.260	MS9375-171	10.500	.125	3.520
MS9375-028	1.562	.030	.524	MS9375-064	3.812	.060	1.280	MS9375-175	10.750	125	3.610
MS9375-029	1.625	.030	.546	MS9375-065	3.875	.060	1.300	*MS9375-179	11.000	.125	3.700
MS9375-030	1.688	.030	.567	MS9375-066	3.938	.060	1.322	MS9375-183	11.250	.125	3.780
*MS9375-031	1.750	.030	.587	*MS9375-067	4.000	.060	1.342	MS9375-187	11.500	.125	3.860
MS9375-032	1.812	.030	.610	MS9375-069	4.125	.060	1.385	MS9375-191	11.750	.125	3.950
MS9375-033	1.875	.030	.630	MS9375-071	4.250	.060	1.428	*MS9375-195	12.000	.125	4.040
MS9375-034	1.938	.030	.651	MS9375-073	4.375	.060	1.470				
*MS9375-035	2.000	.030	.671	*MS9375-075	4.500	.060	1.510				
MS9375-036	2.062	.030	.691	MS9375-077	4.625	.060	1.555				
MS9375-037	2.125	.030	.714	MS9375-079	4.750	.060	1.600				
MS9375-038	2.188	.030	.735	MS9375-081	4.875	.060	1.640				
*MS9375-039	2.250	.030	.755	*MS9375-083	5.000	.060	1.680				
MS9375-040	2.312	.030	.776	MS9375-085	5.125	.090	1.720				
MS9375-041	2.375	.030	.797	MS9375-087	5.250	.090	1.760				
MS9375-042	2.438	.030	.820	MS9375-089	5.375	.090	1.805				
*MS9375-043	2.500	.030	.840	*MS9375-091	5.500	.090	1.850				
MS9375-044	2.562	.060	.860	MS9375-095	5.750	.090	1.933				
MS9375-045	2.625	.060	.881	*MS9375-099	6.000	.090	2.018				
MS9375-046	2.688	.060	.903	MS9375-103	6.250	.090	2.098				

1. RING SHALL BE FLAT WITHIN B.
2. *PREFERRED SIZES.
3. MATERIAL: CORROSION AND HEAT RESISTANT STEEL TUBING AMS 5570 OR AMS 5576. TUBE SIZE .093-.097 DIA., WALL THICKNESS .009-.011.
Ⓐ 4. FINISH WELD FLUSH WITH TUBE OD. SMOOTH BLEND WITHIN .125 OF WELD DIMENSIONS AT BLEND SHALL NOT BE MORE THAN .004 BELOW ADJACENT SURFACES.
5. FINISH SILVER PLATE AMS 2410 .0010-.0015 THICK.DIMENSIONS TO BE MET BEFORE PLATING. CONTACT POINTS PERMISSIBLE ON ID OF RING.
6. SURFACE ROUGHNESS AS 291
7. MANUFACTURING SPECIFICATION AMS 7325
8. IDENTIFICATION: MARK MS9375-XXX & MANUFACTURER'S IDENTIFICATION ON CONTAINER
9. DIMENSIONS IN INCHES
10. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

Reviewers and Users: USAF - 11, Navy - AS

APPROVED 19 Aug 64 — REVISED Ⓐ 20 Jan 1967

This standard has been approved by the USAF (11) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P.A	TITLE	MILITARY STANDARD
USAF - 11	GASKET - METAL O-RING, .094 TUBE X .010 WALL, SILVER PLATED	MS9375 (ASG)
Other Cust: Navy - AS		
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 NOV 67 672-1 (Limited coordination) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1967-251 816/1230

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.