FED SUP CLASS
5306

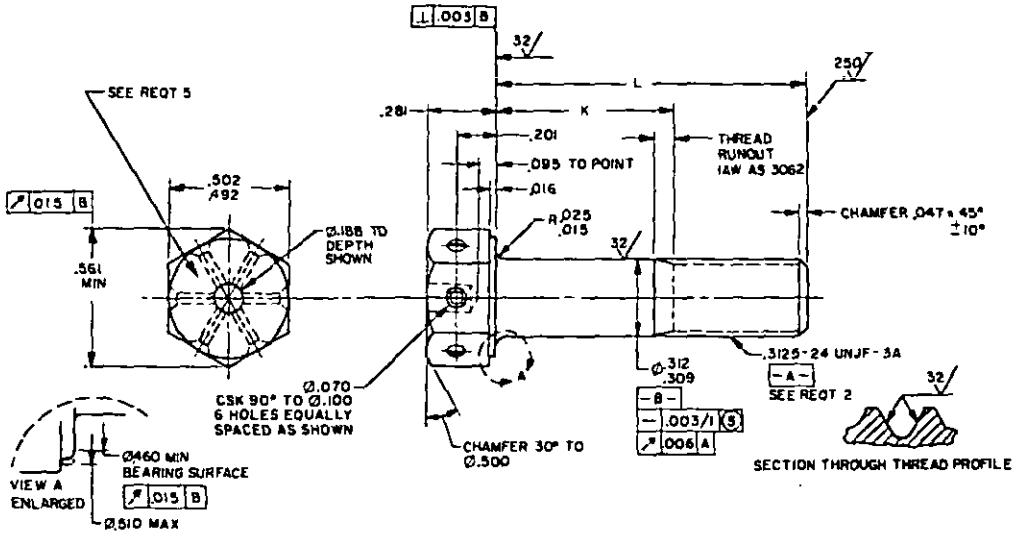


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	L	K	APPROX WEIGHT LB/100
-04	.500	.088-.108	2.59
-05	.562	.088-.108	2.73
-06	.625	.088-.108	2.86
-07	.688	.088-.108	3.00
-08	.750	.088-.108	3.14
-09	.812	.088-.108	3.27
-10	.875	.088-.108	3.41
-11	.938	.088-.108	3.54
-12	1.000	.088-.125	3.68
-13	1.062	.128-.188	3.81
-14	1.125	.190-.250	3.95
-15	1.188	.252-.312	4.08
-16	1.250	.315-.375	4.22
-17	1.312	.378-.438	4.35
-18	1.375	.440-.500	4.49
-19	1.438	.502-.562	4.62
-20	1.500	.565-.625	4.76
-21	1.562	.628-.688	4.89
-22	1.625	.690-.750	5.03
-23	1.688	.752-.812	5.17
-24	1.750	.812-.875	5.30
-25	1.875	.940-1.000	5.57
-26	2.000	1.065-1.125	5.84
-27	2.125	1.190-1.250	6.11
-28	2.250	1.315-1.375	6.38
-29	2.375	1.440-1.500	6.65
-30	2.500	1.565-1.625	6.92
-31	2.625	1.690-1.750	7.19
-32	2.750	1.815-1.875	7.47
-33	2.875	1.940-2.000	7.74
-34	3.000	2.065-2.125	8.01
-35	3.125	2.190-2.250	8.28
-36	3.250	2.315-2.375	8.55
-37	3.375	2.440-2.500	8.82
-38	3.500	2.565-2.625	9.09
-39	3.625	2.690-2.750	9.36
-40	3.750	2.815-2.875	9.63
-41	3.875	2.940-3.000	9.90
-42	4.000	3.065-3.125	10.17
-43	4.125	3.190-3.250	10.44
-44	4.250	3.315-3.375	10.71
-45	4.375	3.440-3.500	10.98
-46	4.500	3.565-3.625	11.25
-47	4.625	3.690-3.750	11.52
-48	4.750	3.815-3.875	11.80
-49	4.875	3.940-4.000	12.07
-50	5.000	4.065-4.125	12.34
-51	5.125	4.190-4.250	12.61
-52	5.250	4.315-4.375	12.88
-53	5.375	4.440-4.500	13.15
-54	5.500	4.565-4.625	13.42
-55	5.625	4.690-4.750	13.69
-56	5.750	4.815-4.875	13.96
-57	5.875	4.940-5.000	14.22
-58	6.000	5.065-5.125	14.50
-59	1.812	.878-.938	5.44
-60	1.938	1.002-1.062	5.71

Ⓑ ENTIRE STANDARD REVISED

APPROVED 5 MAY 1965 REVISED Ⓑ 30 SEPT 87

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY – AS Other Cust AIR FORCE-99		BOLT, MACHINE HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .3125-24 UNJF-3A	MS9585
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1180

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE – 82
ARMY – MI
DLA – IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5731 (UNS S66286).
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645.
4. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
5. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478 CLASS A.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
8. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9585-04



MS9585-04 INDICATES - BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK AMS 5731, .3125-24 UNJF-3A x .500 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 5 MAY 1965 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE - 82
ARMY - MI
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY - AS Other Cust AIR FORCE-99		BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .3125-24 UNJF-3A	MS9585
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1180

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:20Z
Check the source to verify that this is the current version before use.