MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, PIN CONTACTS, RIGHT-ANGLE, FOR PRINTED WIRING BOARDS (.150 SPACING)

Ⓒ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.


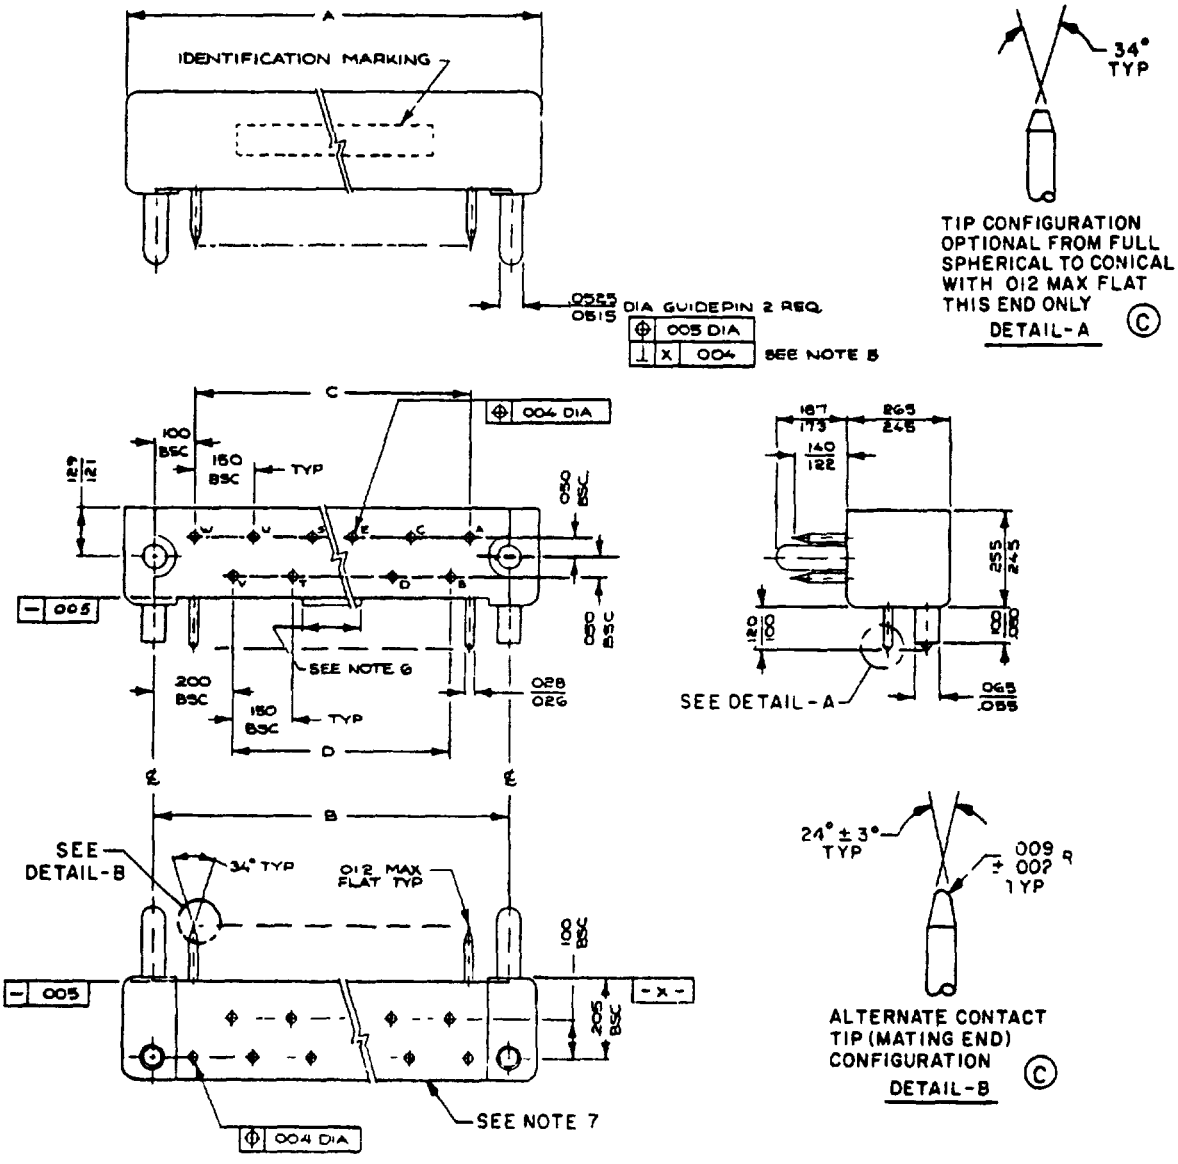


FIGURE 1 Connectors, plug (.100 spacing)


FSC 5935

Ⓒ denotes change


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

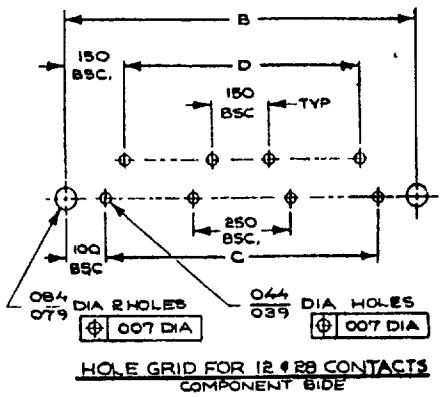

HOLE GRID FOR 12 & 28 CONTACTS
COMPONENT SIDE

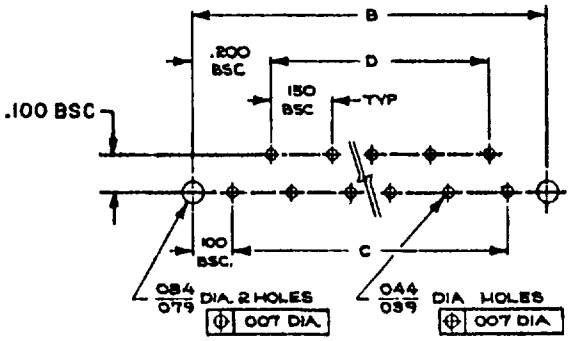

HOLE GRID FOR 7, 17 & 23 CONTACTS
COMPONENT SIDE

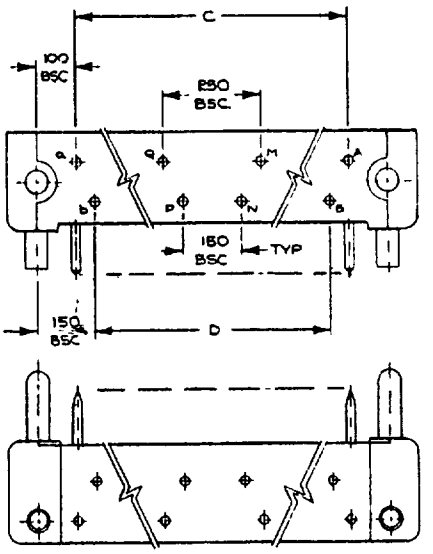

ARRANGEMENT FOR 12 & 28 CONTACTS

TABLE I. Dimensions and dash number.

Dash No.	No of contacts	A ± 005	B Basic	C Ref	D Ref
01	7	800	650	450	300
02	12	1 200	1 050	850	750
03	17	1 550	1 400	1 200	1 050
04	23	2 000	1.850	1 650	1 500
05	28	2 400	2 250	2.050	1 950

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.044	1.12	.100	2.54	.200	5.08	.750	19.05	1.850	46.99
.004	.10	.050	1.27	.120	3.05	.205	5.21	.800	20.32	1.950	49.53
.005	.13	.0515	1.308	.121	3.07	.245	6.22	.850	21.59	2.000	50.80
.007	.18	.0525	1.334	.122	3.10	.250	6.35	1.050	26.67	2 050	52.07
.009	.23	.055	1.40	.129	3.28	.255	6.48	1 200	30.48	2.250	57.15
.012	.30	.065	1.65	.140	3.56	.265	6.73	1.400	35.56	2 400	60.96
.026	.66	.079	2.01	.150	3.81	.300	7.62	1.500	38.10		
.028	.71	.080	2.03	.173	4.39	.450	11.43	1.550	39.37		
.039	.99	.084	2.13	.187	4.75	.650	16.51	1.650	41.91		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/2 and are primarily for use with single-sided, double-sided, or multilayered printed wiring boards.
5. Positional tolerances of guide pins shall apply at datum plane X.
6. Pad(s) suitable for printed circuit board support are required. Dimensions and location(s) are optional.
7. The terminating side and the side opposite mating face of the plug may be open or solid construction.

FIGURE 1. Connectors, plug (.100 spacing) - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Material:
Guide pins and guide bushing Brass composition B, 60,000 to 70,000 PSI tensile, as specified in QQ-W-321, or FC brass as specified in QQ-B-626.
(C) Plating
Guide pins and guide bushings. Gold over copper, type II, class 1, grade C, as specified in MIL-G-45204.
Contact Gold per MIL-G-45204, type II, grade C, Class 1, over nickel plating per QQ-N-290, Class 2, 50 to 150 microinches.
Contact identification Shall be alphabetical and sequential in the pattern indicated, using upper case characters followed by lower case characters.
Pin size. 23
Wire size. 22
Current rating 5 amperes, maximum.

Mating and unmating. The maximum insertion force, in pounds shall not exceed a value equal to 0.5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.11 times the number of contacts, and shall not exceed the measured insertion force.

Contact resistance The average resistance of all contact pairs measured shall not exceed .010 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm.

Dielectric withstanding voltage.
Sea level: 1,000 volts rms, 60 Hz, ac.
High altitude. 500 volts rms, 60 Hz, ac.

Part number: M55302/1- (dash number from figure 1).

Replacement data The connectors covered by this specification were formerly identified with printed circuits as UPC-150-MR-( ).

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review Activities:
Army - MI
Navy - AS
Air Force - 11, 85, 99
DLA - ES

User activities
Army - AT, AV,
Navy - MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3095-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
FORT MONMOUTH, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation.

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:43Z
Check the source to verify that this is the current version before use.