INCH-POUND

MIL-C-55302/83B(USAF)
2 March 1989
SUPERSEDING
MIL-C-55302/83A(USAF)
15 October 1979

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, 41, 66, 114 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 X .050 OFFSET GRID)

Ⓑ Inactive for new design after 1 July 1989

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302.


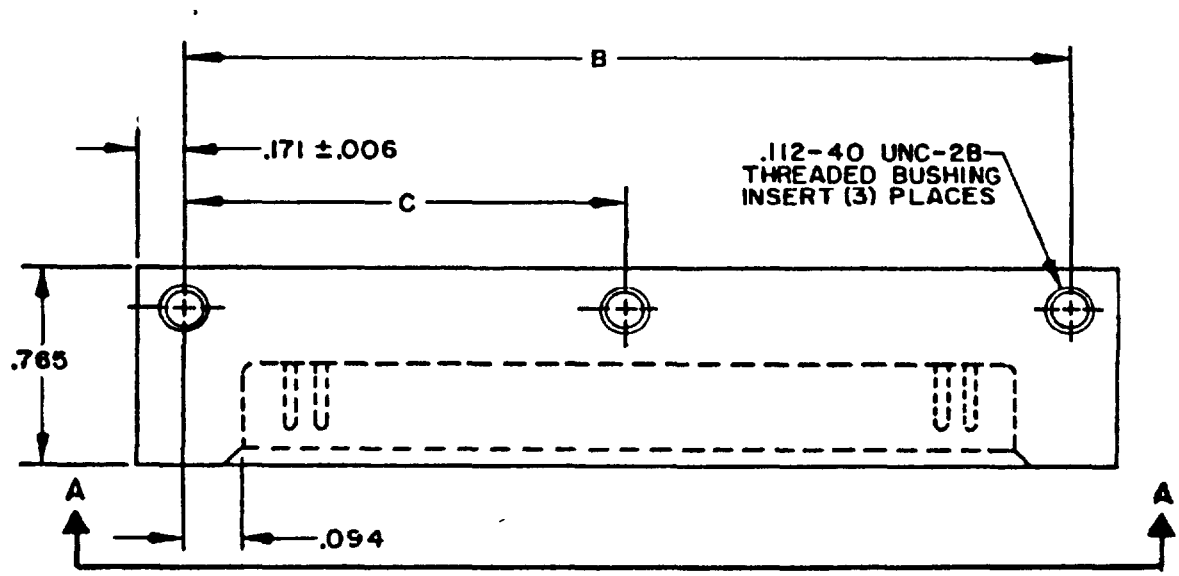


FIGURE 1. Connectors, plug (.100 x .050 offset grid).

Ⓑ denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

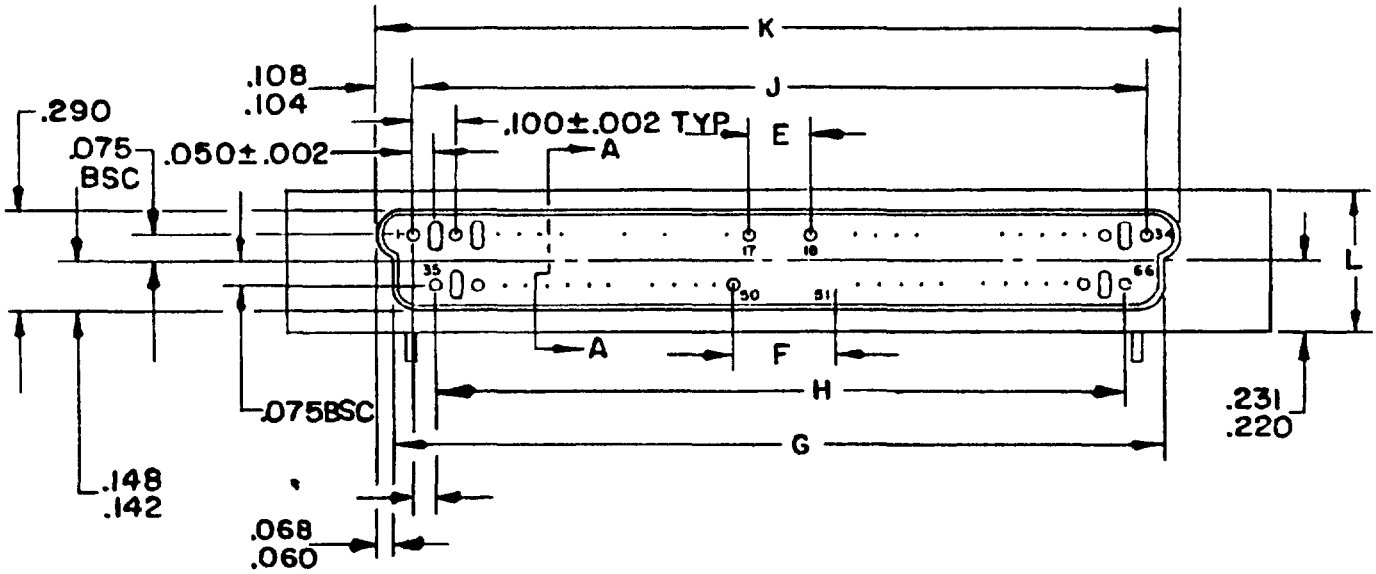

VIEW A-A

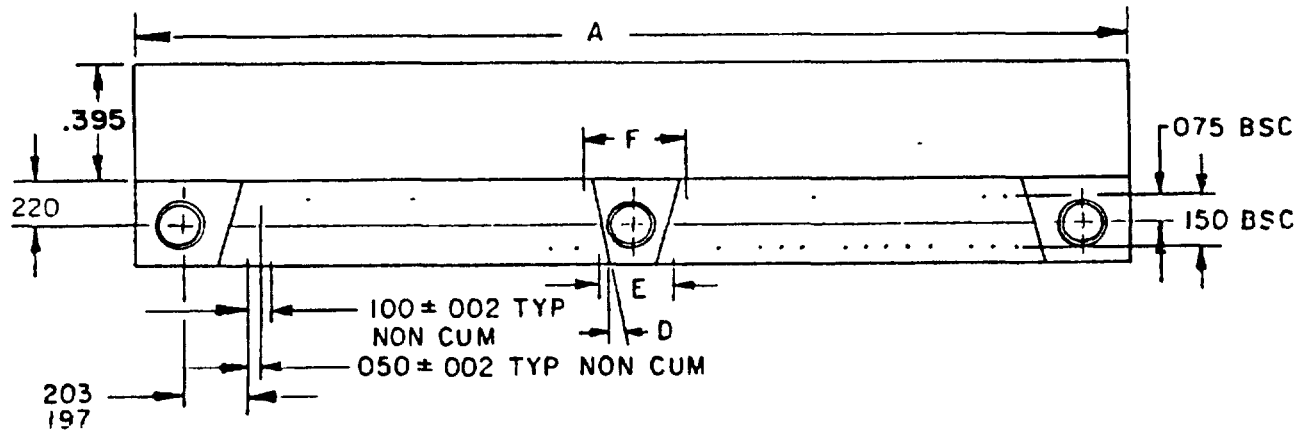


FIGURE 1. Connectors, plug (.100 x .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

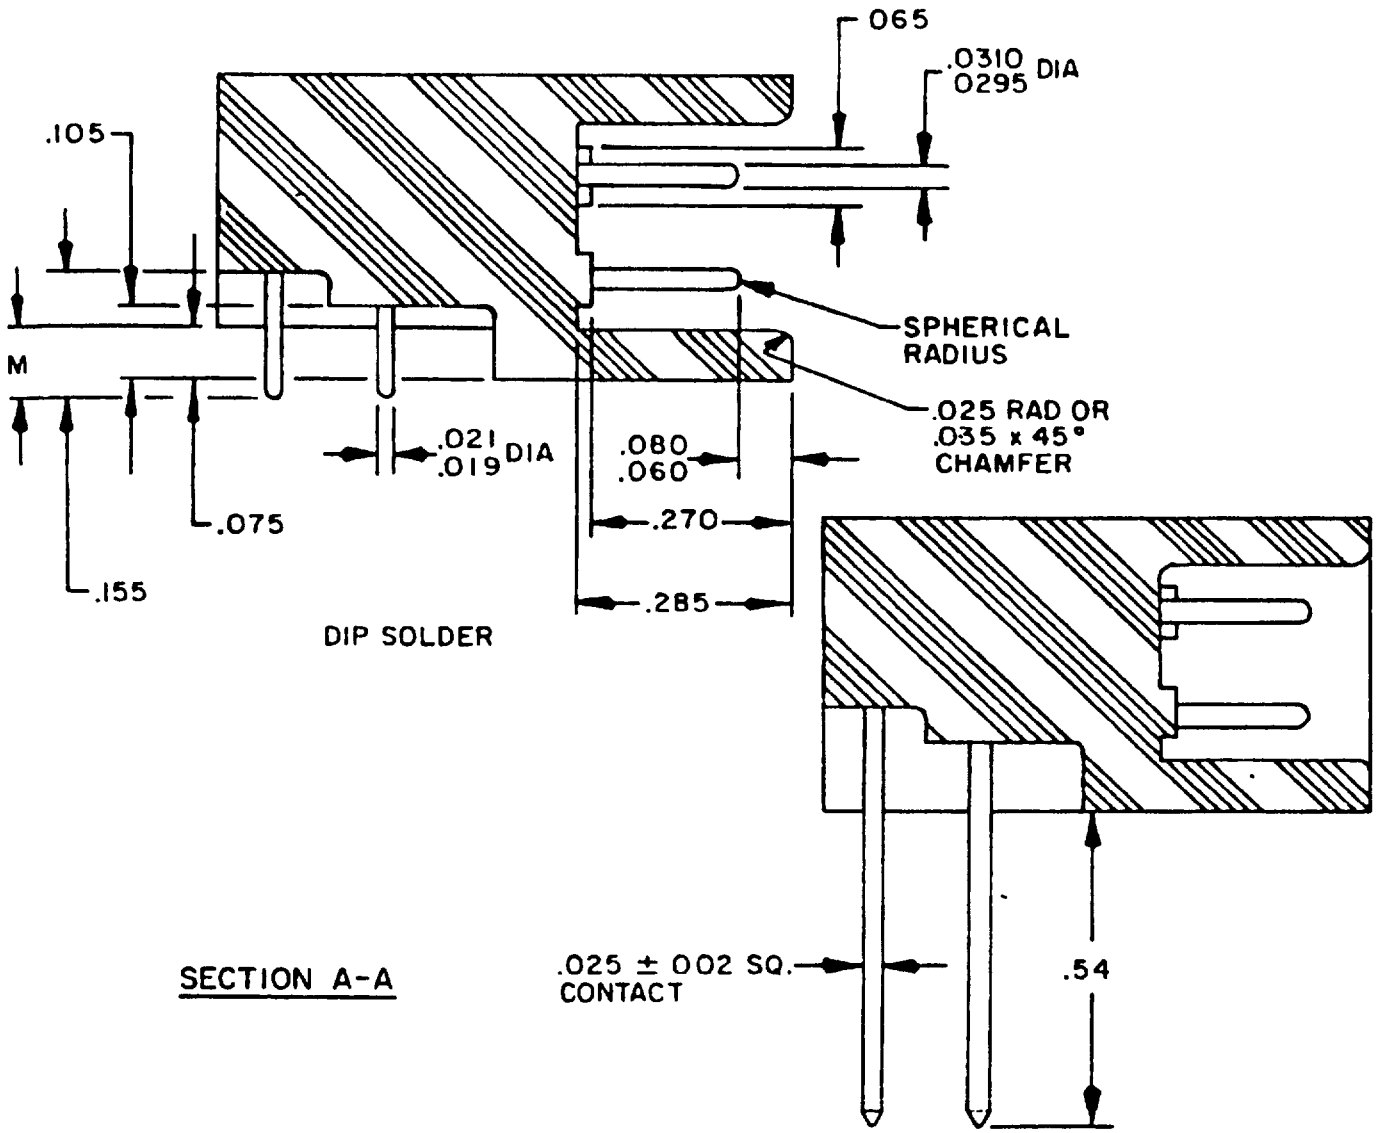


FIGURE 1. Connectors, plug (.100 x .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.100	2.54	.231	5.87	2.74	69.6
.010	0.25	.104	2.64	.270	6.86	3.200	81.28
.019	0.48	.105	2.67	.285	7.24	3.400	86.36
.021	0.53	.108	2.74	.290	7.37	3.500	88.90
.025	0.64	.125	3.18	.300	7.62	3.585	91.06
.0295	0.749	.142	3.61	.365	9.27	3.712	94.28
.031	0.79	.148	3.76	.400	10.16	3.900	99.06
.035	0.89	.150	3.81	.436	11.07	4.24	107.7
.050	1.27	.155	3.94	.452	11.48	5.900	149.86
.060	1.07	.160	4.06	.500	12.70	6.000	152.40
.068	1.12	.172	4.37	.54	13.72	6.085	154.56
.075	1.68	.197	5.00	.765	19.43	6.215	157.86
.080	1.27	.203	5.16	1.950	49.53	6.400	162.56
.094	1.52	.220	5.59	2.400	60.96	6.74	171.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) for three place decimals, ±.02 (0.5 mm) for two place decimals, and ±2° on angles.
4. These connectors mate with connectors in accordance with MIL-C-55302/82.

FIGURE 1. Connectors, plug (.100 x .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dash num contacts, and dimensions.

Dash number	Number of contacts	P.C. board thickness	Type of termination	Dimensions											
				A	B	BSC C	D	BSC E	BSC F	G	H	J	K	L	M
-01	66	1/16 inch	Dip solder	4.24	3.900	1.950	18° 30'	.300	.400	3.585	3.400	3.500	3.712	.436	.105
-02 1/	66	1/16 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.105
-03	66	3/32 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.160 .125
-04 1/	66	3/32 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.160 .125
-05	66	N/A	Wrappost	"	"	"	"	"	"	"	"	"	"	"	N/A
-06	41	1/16 inch	Dip solder	2.74	2.400	2.400	N/A	N/A	N/A	2.085	1.900	2.000	2.212	.436	.105
-07 1/	41	1/16 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.105
-08	41	3/32 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.160 .125
-09 1/	41	3/32 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.160 .125
-10	114	1/16 inch	Dip solder	6.74	6.400	3.200	18° 30'	.400	.500	6.085 ±.010	5.900	6.000	6.215 ±.010	.452	.105
-11 1/	114	1/16 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.105
-12	114	3/32 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.160 .125
-13 1/	114	3/32 inch	Dip solder	"	"	"	"	"	"	"	"	"	"	"	.160 .125
-14	114	N/A	Wrappost	"	"	"	"	"	"	"	"	"	"	"	N/A

1/ No SN60 or SN63 on termination end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I. Connector is designed for assembly to a .068/.058 or .099/.089 printed circuit board.

Material: In accordance with MIL-C-55302.

Contacts: Phosphor bronze in accordance with QQ-W-321, alloy 510.

Plating: The contact plating shall be gold in accordance with MIL-G-45204, type II, grade C, class 1 over suitable copper plate. The termination end of the pin contact shall be hot dipped in SN60 and SN63 solder in accordance with QQ-S-571, to within .015 of mounting surface. The thickness of the solder shall be no less than .0001 and no more than .001 inch. Not more than .000050 inch of gold shall be retained after dipping.

Contact identification: See figure 1.

Contact resistance. The potential drop across mated contacts at 3.0 amperes test current shall not exceed 25 millivolts, and after corrosion test shall not exceed 30 millivolts.

Dielectric withstanding voltage:

Sea level: 1500 V ac (rms) test.

50,000 feet altitude: 500 V ac (rms) test.

Current rating: 3.0 amperes maximum per contact; 2.25 amperes continuous per contact per connector at room ambient.

Part number: See table I.

(B) Required testing limited to group A tests only. Qualification requirements are not applicable.

CONCLUDING MATERIAL

Custodian
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F344-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.