[INCH-POUND]
A-A-2591
December 22 1995

COMMERCIAL ITEM DESCRIPTION

CLAMPING TOOL, STRAP BAND, HOSE

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Federal Specification GGG-C-413 for all federal agencies.

1. SCOPE.

This description covers a clamping tool used in applying metal strapping to pliable tubing, when fixing it to rigid tubing, splicing electric welding cable, tying conduit or cable to pipe lines or girders and making cable line taps.

2. CLASSIFICATION.

Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Material. The clamping tool shall be made from drop forged carbon or alloy steel.

3.2 Design. The clamping tool shall be similar to the figure herein and capable of providing tension forces from 0 to 2250 pounds to steel strapping. Components parts of the tool shall be interchangeable.

3.3 Performance. The clamping tool shall be capable of tightening and cutting steel strapping placed around a two inch rubber hose, assembled over a rigid male fitting, in the maximum time of one minute.

3.4 Dimensions. The maximum dimensions shall be as shown in the figure. The strapping clamp head shall travel three and one-half inches plus or minus 1/4 inch.

3.5 Distortion resistance. The clamping tool shall withstand 2250 pounds of tension. There shall be no slippage of the strap gripped by the jaws when tested in accordance with 5.5.

3.6 Durability. The clamping tool shall have the capability of tensioning metal strapping in sizes 3/8 through 3/4 inch in width and 0.025 through 0.030 inch in thickness when tested in accordance with 5.6.

3.7 Hardness. The grippers (jaws) shall have a Rockwell C hardness of 56-62. The cutters shall have a Rockwell C hardness of 56-63. Hardness test shall be tested in accordance with ASTM E 18.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Tools and Appliances Commodity Center, Washington, DC 20406.


FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

3.8 Coating. The visible surfaces of the clamping tool shall be electroplated with zinc or nickel or shall be painted with an epoxy paint.

3.9 Instructions. Complete operating, maintenance and safety instructions shall be furnished with each tool.

3.10 Illustration. Except for the technical requirements (e.g., dimensions and design), the illustration herein is descriptive and not intended to preclude the purchase of items otherwise conforming to the requirements of this description.

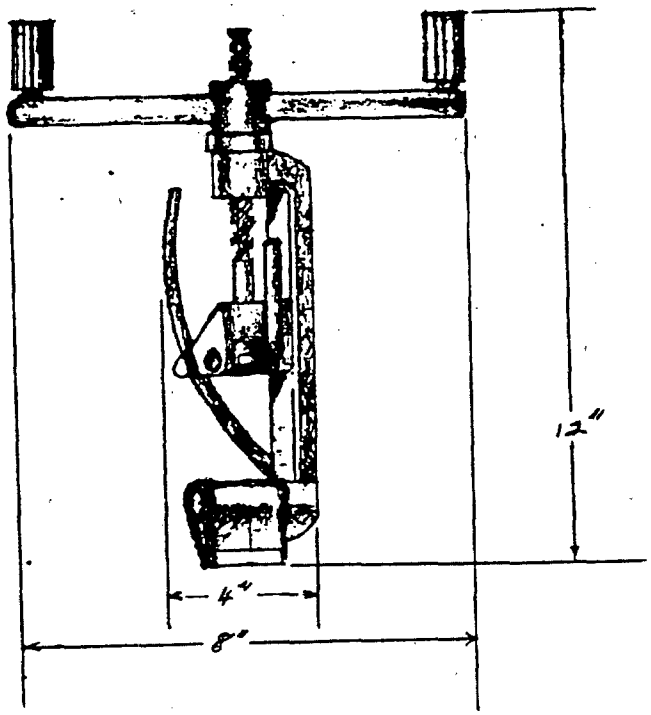

3.11 Identification marking. The clamping tool shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All marking shall be engraved, etched, molded, or stamped directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.12 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free of manufacturing workmanship defects (eg., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the Contracting Officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Contractor's certification. The contractor shall provide certification and maintain substantiating evidence that items being offered for acceptance meet the requirements of this Commercial Item Description and conform to the manufacturer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

5.5 Strength test. The frame of the clamping tool shall be securely fastened in a stationary fixture. One end of a piece of strapping shall be placed in the jaws of the tool and the other end attached to a tension measuring device. A load of 2250 pounds shall be developed by actuating the handle of the tension screw. The tool shall sustain this load for at least 5 minutes without deformation of any component or slippage of the strapping in the jaws. A deformed component or slippage of strapping in the jaws is a defect and shall be cause for rejection.

5.6 Durability test. A 3/4 inch wide by 0.030 inch thick steel steel strapping shall be severed by a cutting device on the sample tool while the strapping is under no stress or tension. This operation shall be repeated 50 times without the necessity for repair or replacement of any component of the tool. Failure of any component during the above testing is a defect and shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1 Packaging. Requirements for preservation, packing, packaging, and marking of containers shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents.

ASTM: American Society for Testing Materials, 1916 Race St., Philadelphia, PA 19103.

ANSI/ASQC: American Society for Quality Control, P. O. Box 3005, 611 E. Wisconsin Ave., Milwaukee, WI 43201-4606.

Federal Acquisition Regulations (FAR): Government Pringint Office, Superintendent of Document, Washington, DC 20402-9371.

Federal Specifications: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN.
(c) When applicable, the specific type, styles, classes, sizes, etc., as specified in the Commercial Item Description.
(d) If bid samples are required and the number of samples.
(e) If first article samples are required and the number of samples.
(f) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection and testing. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample tool shall be examined for all salient characteristics. The Inspection Level shall be Level 3 with an Acceptable Quality Level of 2.5 percent defective.

Testing. Each sample tool shall be tested for all salient characteristics. The Inspection level for the hardness test shall be S-2 with Acceptable Quality of 2.5 percent defective.

(g) What preservation, packaging, and marking are required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

7.3 National Stock Number (NSNs). The following NSN is associated with this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN 5120-00-278-9925

MILITARY INTERESTS:

MILITARY COORDINATING ACTIVITY

Army - GL

Custodians

Air Force - 99

Review Activity

Air Force - 84

User Activity

Army - ME, ER
Navy - MC

DoD Project 5120-C072

Preparing Activity:

GSA -FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.