[INCH-POUND]

A-A-2651
February 14,1991

COMMERCIAL ITEM DESCRIPTION

BINDER, AWARD CERTIFICATE

The General Services Administration has authorized the use of this commercial item description.

This description covers requirements for Award Certificate Binders for the following military activities:

TYPE I - U.S. AIR FORCE
TYPE II - U.S. ARMY
TYPE III - U.S. MARINE CORPS
TYPE IV - U.S. NAVY

1. Salient Characteristics

A. Design of the binder, the bound side shall be to the left, when the binder is closed. The binder opens as a book.

B. The cover material, hinge reinforcement strip and corner pockets shall be 0.013 ± 0.001 thick vinyl plastic.

C. The front and back covers shall have a commercial board filler, grained long, 1/8 ± 1/32 inch thick.

D. The front and back covers shall be padded with 1/8 ± 1/32 inch thick polyurethane foam , which shall be inserted between the outside covers and the commercial board filler.

E. The exposed surfaces of the plastic cover material and corner pockets shall be embossed with a shallow grain.

F. The binder and protector sheet shall be of the dimensions specified in FIGURE 1.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

G. Four right angled corner pockets, 1-3/4 ± 1/16 inches in length on the seam sides, shall be constructed on the inside of both the front and back covers. The slit construction method is not acceptable.

H. The four corner pockets on each of the front and back covers shall be constructed such that, they accept and retain, in a flat state, one protective sheet and one 0.010 inch thick award certificate (SEE FIGURE 1).

I. Two clear polyester film window protector sheets shall be provided with each binder (SEE FIGURE 1). The protector sheets shall be inserted into the pockets provided on each cover.
Note: The minimum size binder must accept the maximum size certificate and protector.

J. All seams and welds shall be made by the electronic sealing method.

K. The front cover shall have an unbroken debossed (no color added) border 1/16 ± 1/64 inch wide, and 1/2 ± 1/16 inch from the sealed edge, all around. The lines shall appear straight (except for corners) and parallel to the outside edges, as viewed by the naked eye.

L. The binder shall be constructed with a ribbed back with not less than 4 single bar scores and the inside hinge area shall be reinforced with vinyl 2-3/8 ±1/16 inches wide.

M. Requirements Applicable To Specified Types:

1) TYPE I (AIR FORCE) - The color of the plastic material shall be a general match to color chip 15090 of FED-STD-595. The binder shall have centered on the front cover, debossed and hot stamped in silver, an Air Force Seal, 2-1/8 ± 1/16 inches in diameter.

2) TYPE II (ARMY) - The color of the plastic material shall be a general match to color chip 14109 of FED-STD-595. The binder shall have centered on the front cover, debossed and hot stamped in gold, an Army Seal, 2-1/2 ± 1/16 inches in diameter.

3) TYPE III (MARINE CORPS) - The color of the plastic material shall be a general match to color chip 11105 of FED-STD-595. The binder shall have centered on the front cover, debossed and hot stamped in gold, a Marine Corps seal, 2-1/2 ± 1/16 inches in diameter.


4) TYPE IV (NAVY) - The color of the plastic material shall be a general match to color chip 15090 of FED-STD-595. The binder shall have centered on the front cover, debossed and hot stamped in gold, a Navy seal, 2-1/2 ± 1/16 inches in diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

N. Color
Color shall be determined visually as a general match to the applicable color as determined in accordance with ASTM D 1729. If doubt remains regarding this general match, the color shall be inspected in accordance with ASTM D 2244, and a color variance of $\triangle$ E 1.75 maximum shall be considered acceptable.

SEE FIGURE 1
Page 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

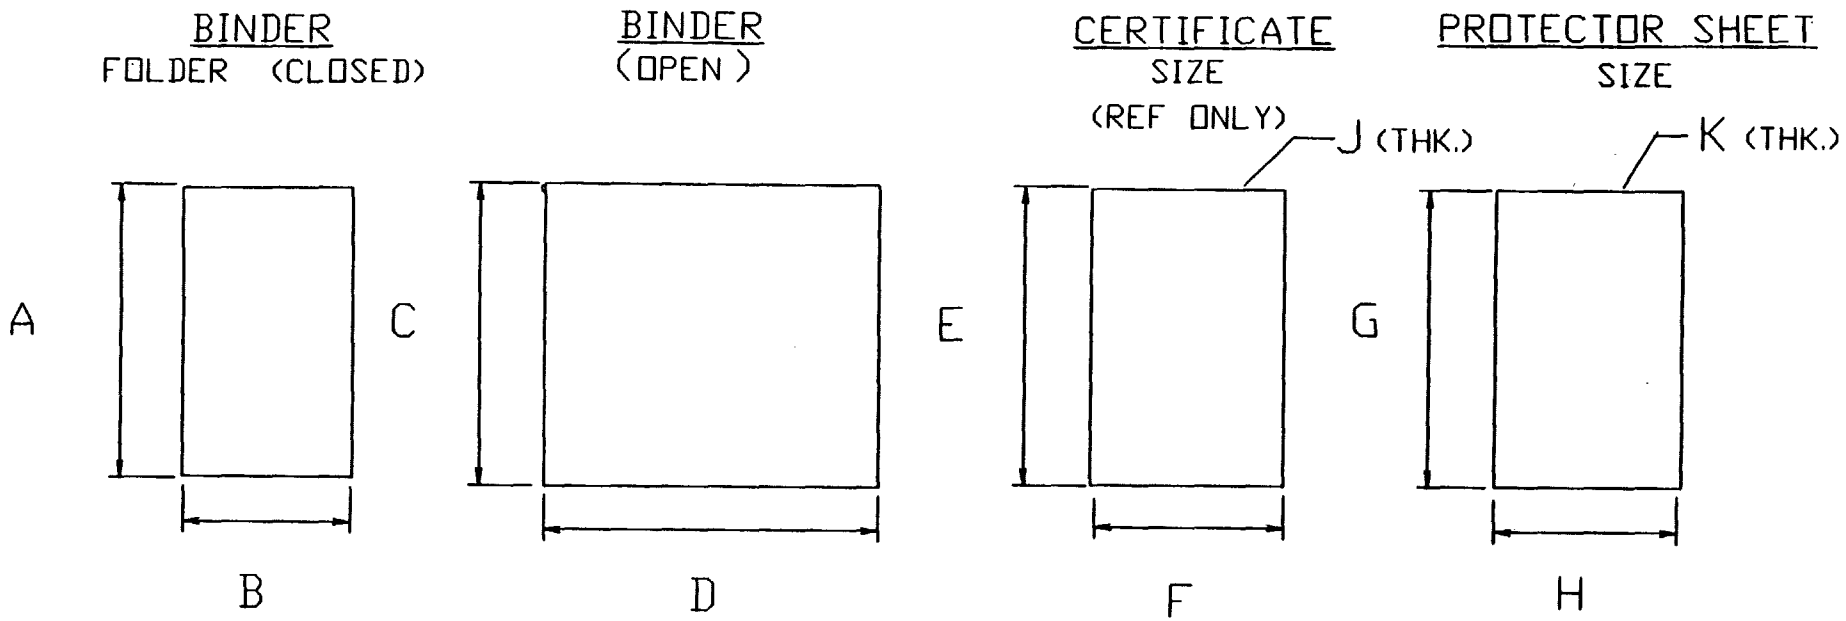

TYPE	A	B	C	D	E	F	G	H	J	K
TOL.	± 1/16	± 1/16	± 1/16	± 1/16	REF	REF	± 1/16	± 1/16	REF	± 0.001
I	9	11-5/8	9	23-1/4	8-1/2	11	8-1/2	11	0.010	0.005
II	8-1/2	11-1/8	8-1/2	22-1/4	8	10-1/2	8	10-1/2	0.010	0.005
III	9	11-5/8	9	23-1/4	8-1/2	11	8-1/2	11	0.010	0.005
IV	9	11-5/8	9	23-1/4	8-1/2	11	8-1/2	11	0.010	0.005

A-A-2651

FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

2. Recovered materials

The offeror/ contractor is encouraged to use recovered materials in accordance with Public Law 94-580, to the maximum extent practicable.

3. Workmanship

Completed binders shall present a neat, finished appearance both inside and outside. The binders shall be free from defects which may affect their durability, serviceability, or appearance.

4. Quality Assurance Provisions

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the government. The Government reserves the right to perform any of the inspections set forth in the Commercial Item Description, where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

Each lot of binders shall be inspected for conformance to the requirements herein. Sampling for Inspection shall be in accordance with MIL-STD-105 using the sampling plans specified below.

A. Visual characteristics - Inspection Level S-2 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one binder.

B. Dimensional characteristics - Inspection Level S-2 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one binder.

C. Packaging, Packing, and Marking - Inspection Level S-2 with an AQL of 4.0 percent defective. The sample unit shall be one fully prepared shipping container.

5. Preparation for Delivery

Packaging, packing and marking shall be as specified in the contract or order.

6. Application for copies of technical documents referenced herein: The issue date in effect on date of invitation for bids or request for proposal shall apply (Unless Otherwise Specified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

ASTM standard test methods can be obtained from the American Society for Testing and Materials; 1916 Race Street; Philadelphia, PA 19103

Fed-STD-595 is available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Auburn, WA.

Military Specifications are available from the, Standardization Documents Order Desk, Building 4D, 700 Robins Ave., Philadelphia, PA. 19111-5094

Public Law 94-580, Resource Conservation and Recovery Act, is part of U.S. Code, Title 42. Available from congressional sales office, U.S. Government Printing Office, Washington, D.C. 20402.

7. Notes:

A. Ordering Data:

Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

1) Type of binder

2) Packaging, packing and marking.

B. Item Identifiers/Reference Part Number System (For Cataloging Use Only)

Part Reference Numbers:

AA2651-1 :This example describes a
BINDER,AWARD CERTIFICATE -TYPE I,U.S.AIR FORCE

1 - TYPE I, U.S.AIR FORCE

2 - TYPE II, U.S. ARMY

3 - TYPE III, U.S. MARINE CORPS

4 - TYPE IV, U.S. NAVY

Military Interests:
Custodians
ARMY-GL
NAVY-SA
AIR FORCE-99

Preparing Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.