[INCH-POUND]
A-A-2979
October 11, 1996

COMMERCIAL ITEM DESCRIPTION

JACK, RACK BAR

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of the type VI, class 1, style B rack bar jack specified in GGG-J-51E for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a rack bar jack for heavy duty use in handling heavy machinery, automotive equipment, and construction and maintenance equipment.

2. CLASSIFICATION.

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The rack bar jack consists of a base and frame, a rack bar, retaining and lifting pawls, trunnions, bearings, socket lever, lever bar, and cap. The jack shall be single acting and operate on the downward stroke of the lever. The rack bar jack shall be similar to Figure 1 and conform to the dimensions specified in Table I.

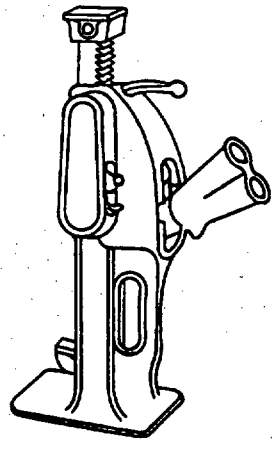


Figure 1. Jack, rack bar (ratchet-lever lowering, lever type), solid base with foot lift, double-socket.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

TABLE I. Rack bar jack (ratchet-lever lowering, lever type), solid base with foot lift, double-socket

Rated capacity (Tons)	Closed height (maximum) (Inches)	Rise (minimum) (Inches)	Weight of jack (maximum) (Pounds)	Size of base (bottom) (minimum) (Square Inches)	Head (cap) size (minimum) (Square Inches)
10	22	11-1/2	65	54	7-1/2

3.2 Base and frame. The base and frame shall be of one-piece construction made of malleable iron, steel, or aluminum. The rack bar shall be solid steel, properly hardened and equipped with a forged claw or foot lift. The teeth of the rack bar shall be machine cut and smoothly finished. A suitable device shall be provided to permit the jack, while under load, to be lowered safely when and as controlled by the operator.

3.3 Pawls. The lifting and sustaining pawls shall be of steel, properly heat treated and so arranged in the jack mechanism that one or the other will always be in mesh with the rack bar when the jack is under load.

3.4 Trunnions and bearings. The trunnions, on which the lever socket oscillates, shall be of steel and the bearings, in which the trunnions rotate, shall have case-hardened bushings.

3.5 Carrying handle. Suitable drop-type handles or an opening in the base shall be provided to allow for carrying or placing the jack.

3.6 Socket. The jack shall have round double sockets and a 1-1/4 inch minimum diameter steel lever bar.

3.7 Rated capacity. The jack shall conform to the dimensions and load capacity specified in Table I.

3.8 Performance. The jacks shall be subjected to the load test and load-sustaining test specified in 3.8.1 and 3.8.2. The jacks and their component members shall show no mechanical defects or ineffective operation and shall not fail, fracture, take permanent set, or show any evidence of instability, bending, shearing, or undue or excessive wear. The jacks and their component's control devices and trip mechanism shall operate properly and effectively, and there shall be no mechanical defects at the completion of the tests.

3.8.1 Load test. The jack shall support the respective test load specified in Table II. The jack shall be in a vertical position and the load shall be balanced. The rack shall be set at any position other than fully retracted position.

3.8.2 Load-sustaining test. The jack shall sustain (support) the respective test loads specified in Table II for 10 minutes. The load shall be applied at maximum rise.

TABLE II. Load test

Jack	Rated capacity (Tons)	Test load support		Test sustain load for 10 minutes
		Head, saddle (cap), hook lift (Tons)	Foot lift (Tons)	Head, saddle (cap), hook lift (Tons)
Rack bar (ratchet-lever lowering, double socket)	10	11	5	11

3.9 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) The applicable rated capacity, as specified in the Commercial Item Description.
(d) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(e) If first article samples are required and the number of samples required.
(f) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample tool shall be examined for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

Testing. Each sample tool shall be tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(g) What preservation, packing, packaging, and marking or packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the jack specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN	RATED CAPACITY (TONS)
5120-00-542-4011	10 ton

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.