[INCH-POUND]
A-A-2980
October 2, 1996

COMMERCIAL ITEM DESCRIPTION

VISE, PIPE, CHAIN-STYLE

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of the type I, class 1 chain-style pipe vises specified in GGG-V-415A for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers chain-style pipe vises used to grip pipe and hold irregular shapes.

2. CLASSIFICATION.

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The chain vise shall consist of a base, jaw(s), screw, chain, crank handle, and nut. The chain vise shall be properly proportioned in all parts so as to be strong, durable, and easy to operate. The nominal pipe size capacity, screw diameter, and weight shall be in accordance with the dimensions specified in Table I. The chain vise shall be similar to Figure 1.

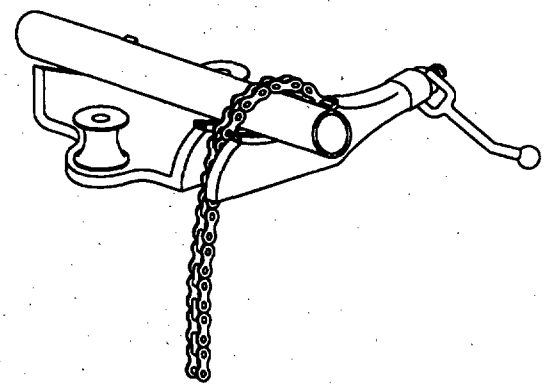


Figure 1. Vise, pipe, chain style.

3.2 Base. The base shall be of forged steel, malleable iron, or ductile cast iron and have at least three mounting holes. The base shall be notched or other means shall be provided to anchor the chain by means of the chain pins.

3.3 Jaw(s). The jaw(s) shall be of steel and rigidly mounted or forged integral with the base. The clamping surface of the jaw(s) shall be V-shaped or semicircular and have mill cut V-shaped teeth for gripping the pipe.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited. FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

TABLE I. Vise, pipe, chain style

National Stock Number (NSN)	Nominal pipe size capacity * (Inches)	Screw diameter (minimum) (Inch)	Weight (minimum) (Pounds)
5120-00-221-1066	1/8 to 2-1/2	11/16	3-3/4
5120-00-180-0670	1/8 to 4	3/4	10
	1/4 to 6	3/4	18
5120-00-180-0647	1/2 to 8	3/4	30
5120-00-078-6662	3/4 to 12	1-1/8	120

* Capacities noted are minimum and maximum required but are not intended to preclude vises with capacity below the minimum or above the maximum (by not more than 1 inch), provided all other requirements are met.

3.3.1 Jaw(s) hardness. The jaw(s) hardness adjacent to the teeth (within 1/4 inch ± 1/32 inch) shall have a hardness of between 52 and 60 on the Rockwell C scale. When tested in accordance with ASTM E18, the hardness shall be as specified.

3.4 Chain. The chain shall be steel with a minimum tensile strength of 90,000 pounds per square inch (psi), and be of the flat-link type with projecting link pins to engage the slot in the base. The chain shall be replaceable and of such length as to grip the pipe for the maximum size for which the vise is designed.

3.4.1 Chain and pin hardness. The chain hardness shall be 34 to 47 on the Rockwell C scale, and the pin hardness shall be 40 to 52 on the Rockwell C scale. When tested in accordance with ASTM E18, the hardness shall be as specified.

3.5 Crank handle. The crank handle shall be located on the top of the vise as shown in Figure 1. The crank handle shall be forged steel, malleable iron, ductile iron, cast iron, or integral pin and yoke section of forged steel and secured to the nut.

3.6 Nut. The nut shall be malleable iron, ductile iron, or steel and threaded internally to engage the thread of the screw. The length of the nut shall be at least equal to the major diameter of the screw.

3.7 Screw. The vise screw shall be of steel with a minimum of 55,000 psi yield and 65,000 psi tensile strength.

3.8 Coating. The base shall be given either one coat of enamel or lacquer, or one coat of primer and one coat of enamel or lacquer. All other components shall have an oil coating.

3.9 Interchangeability of parts. All parts having the same manufacturer's number shall be directly and completely interchangeable with each other with respect to installation and performance.

3.10 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.11 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:28Z
Check the source to verify that this is the currentversion before use.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

ASTM E18: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) When applicable, the specific pipe size, as specified in the Commercial Item Description.
(d) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(e) If first article samples are required and the number of samples required.
(f) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(g) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the vise specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN	NOMINAL PIPE SIZE CAPACITIES
5120-00-221-1066	1/8 inch to 2-1/2 inches
5120-00-180-0670	1/8 inch to 4 inches
5120-00-180-0647	1/2 inch to 8 inches
5120-00-078-6662	3/4 inch to 12 inches

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.