
FED. SUP CLASS
5340

MS124651 THRU MS124690

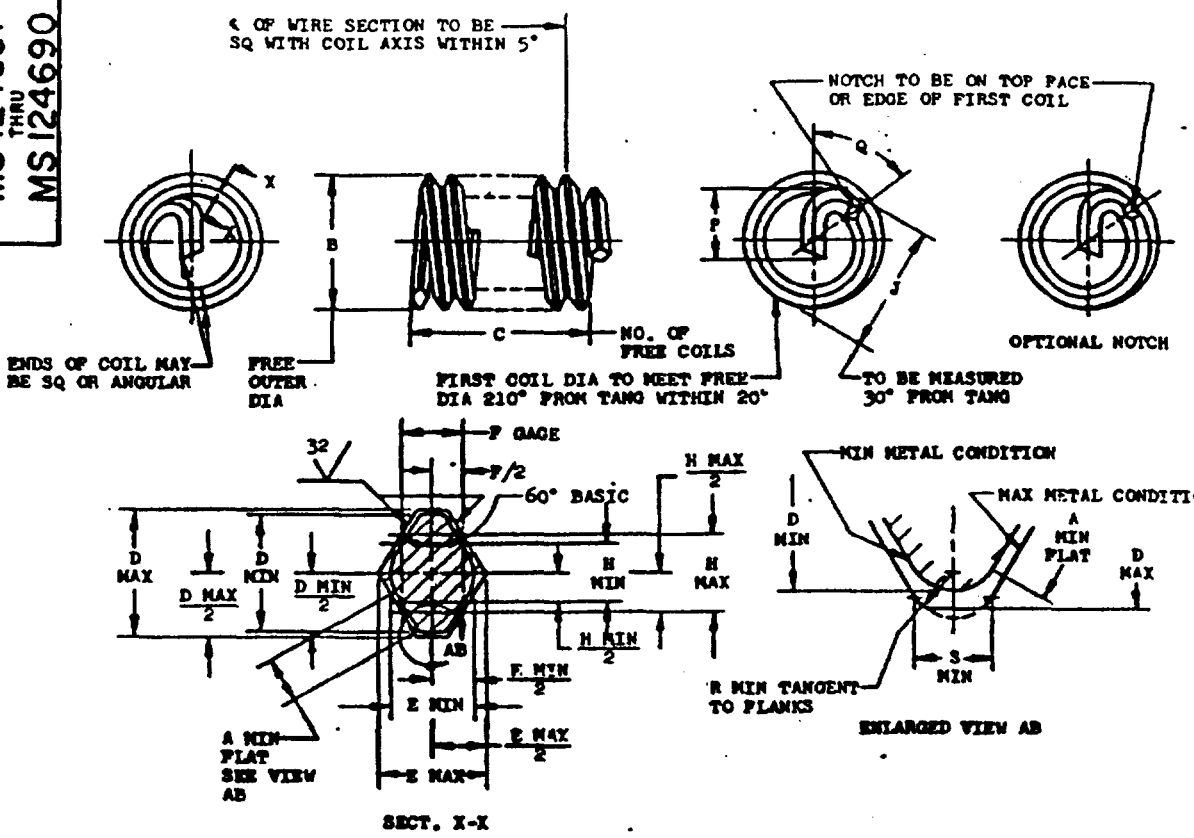

THREAD SIZE	** NOMINAL LENGTH	A MIN	B MIN	B MAX	C* 2.250 COIL	D MIN	D MAX	E MIN	E MAX	F GAGE	H MIN	H MAX
.099 -56	.099	.0027	.131	.146	3.375	.0163	.0193	.0126	.0156	.00893	.0112	.0140
.112 -48	.112	.0043	.147	.162	3.375	.0196	.0226	.0152	.0182	.01042	.01313	.01353
.138 -40	.138	.0068	.173	.193	3.500	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.164 -36	.164	.0059	.204	.224	3.875	.0261	.0301	.0203	.0243	.01389	.01764	.01804
.190 -32	.190	.0076	.236	.256	4.125	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.250 -28	.250	.0085	.306	.326	5.000	.0347	.0387	.0253	.0313	.01786	.02270	.02320
.3125-24	.312	.0120	.380	.400	5.500	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.375 -24	.375	.0120	.448	.468	6.875	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.4375-20	.438	.0164	.524	.549	6.625	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.500 -20	.500	.0164	.592	.617	7.875	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.5625-18	.562	.0176	.666	.691	8.000	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.625 -18	.625	.0176	.733	.758	9.000	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.750 -16	.750	.0215	.876	.901	9.750	.0636	.0677	.0477	.0547	.03125	.04009	.04059
.875 -14	.875	.0267	1.021	1.051	9.875	.0730	.0770	.0545	.0625	.03571	.04589	.04639
1.000 -12	1.000	.0334	1.169	1.199	9.625	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.000 -14(b)	1.000	.0267	1.156	1.186	11.500	.0730	.0770	.0545	.0625	.03571	.04589	.04639
1.125 -12	1.125	.0334	1.304	1.334	11.125	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.250 -12	1.250	.0334	1.439	1.469	12.500	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.375 -12	1.375	.0334	1.575	1.610	13.750	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.500 -12	1.500	.0334	1.710	1.745	15.250	.0861	.0900	.0649	.0729	.04167	.05363	.05413

(D) FOR CHANGES SEE SHEETS 1 AND 2.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11 Other Cust Army - AV Navy - AS	TITLE INSERT, CRES HELICAL COIL FINE THREAD, 1 DIA NOMINAL LENGTH	MILITARY STANDARD MS 124651 THRU 124690	
PROCUREMENT SPECIFICATION MIL-I-8846	SUPERSEDES: MS21208 IN PART	SHEET 1 OF 2	

APPROVED 21 May 53 REVISED (A) 26 Nov 58 (B) 24 Oct 66 (C) 15 OCT 69 (D) 24 Feb 76

User: Army-EL, ME, MI, MU
Navy-MC, OS
Air Force -

Review activit. my - WC
-navy-
Air Force - 82

This standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21 20:44:42
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5340

THREAD SIZE	J MIN	J MAX	P MIN	P MAX	Q	R MIN	S MIN	APPROX WEIGHT LB/100	PART NUMBERS NOTCHED	PART NUMBERS UNNOTCHED(a)
.099 -56	.124	.146	.072	.090	75°-150°	.0032	.0056	.0051	MS124670	
.112 -48	.134	.150	.080	.095	75°-150°	.0038	.0065	.0099	MS124671	
.138 -40			.100	.130	25°-100°	.0045	.078	.0200	MS124653	MS124673
.164 -36			.117	.147	20°-100°	.0050	.0087	.0325	MS124654	MS124674
.190 -32			.130	.176	15° - 90°	.0056	.0098	.0474	MS124655	MS124675
.250 -28			.173	.239	15° - 70°	.0064	.0112	.109	MS124656	MS124676
.3125-24	.359	.377	.203	.291	15° - 55°	.0075	.0130	.180	MS124657	MS124677
.375 -24	.422	.439	.235	.353	15° - 75°	.0075	.0130	.259	MS124658	MS124678
.4375-20	.494	.514	.281	.416	15° - 75°	.0090	.0156	.459	MS124659	MS124679
.500 -20	.556	.576	.313	.478	15° - 75°	.0090	.0156	.995	MS124660	MS124680
.5625-18	.625	.645	.344	.541	15° - 75°	.0100	.0174	.826	MS124661	MS124681
.625 -18	.688	.708	.375	.588	15° - 75°	.0100	.0174	1.010	MS124662	MS124682
.750 -16	.820	.840	.453	.562	15° - 75°	.0113	.0195	1.695	MS124663	MS124683
.875 -14	.955	.980	.500	.640	15° - 75°	.0129	.0223	2.564	MS124664	MS124684
1.000 -12	1.094	1.119	.526	.728	15° - 75°	.0150	.0260	3.875	MS124651	
1.000 -14(b)	1.080	1.105	.526	.750	15° - 75°	.0129	.0223	3.448	~~MS124665~~	MS124685
1.125 -12	1.219	1.244	.557	.819	10° - 70°	.0150	.0260	4.917	MS124666	MS124686
1.250 -12	1.344	1.369	.679	.941	10° - 70°	.0150	.0260	6.254	MS124667	MS124687
1.375 -12	1.469	1.499	.689	1.001	10° - 70°	.0150	.0260	7.359	MS124668	MS124688
1.500 -12	1.594	1.624	.811	1.123	10° - 70°	.0150	.0260	8.799	MS124669	MS124689

** 1. NOMINAL LENGTH EQUALS BASIC THICKNESS OF PLATE FOR INSERT ASSEMBLY.
2. ASSEMBLED LENGTH OF INSERT TO BE AS SPECIFIED ON MS33537.
* 3. NUMBER OF FREE COILS TO BE COUNTED AND ASSEMBLED LENGTH OF INSERT TO BE MEASURED 90° FROM TANG.
4. MATERIAL: STEEL, CORROSION RESISTANT, AMS 7245 (MATERIAL AND MFG).
5. SURFACE TEXTURE: ANSI B46.1-1962.
6. INSERT, WHEN ASSEMBLED IN TAPPED HOLE AS SPECIFIED IN MS33537, SHALL PRODUCE A FINISHED THD MEETING ALL REQUIREMENTS OF MIL-S-7742 AND SHALL ACCEPT EXTERNAL MIL-S-8879 THREADS.
7. DIMENSIONS IN INCHES.
8. IDENTIFICATION: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
9. DO NOT USE UNASSIGNED PART NUMBERS.
(a) UNNOTCHED INSERTS INACTIVE FOR DESIGN AFTER 15 OCT 1969. USE NOTCHED INSERTS. NOTCHED INSERTS CAN UNIVERSALLY REPLACE INACTIVATED INSERTS, BUT THE INACTIVATED INSERTS CANNOT REPLACE THE SUPERSEDING NOTCHED INSERTS.
(b) ~~MS124665~~ INACTIVE FOR DESIGN AFTER 15 OCTOBER 1969. NO SUPERSEDING STANDARD.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELLY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 29 May 53 — REVISED (A) 26 May 59 (B) 24 Oct 66 (D) FOR CHANGES SEE SHEETS 1 AND 2

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Navy - NC, OS
Air Force -

Navy -
Air Force - 82

P.A.	USAF - 11
Other Cust	Army - AV
	Navy - AS

TITLE: INSERT, CRES HELICAL COIL FINE THREAD, 1 DIA NOMINAL LENGTH

MILITARY STANDARD
MS 124651 THRU 124690

PROCUREMENT SPECIFICATION: MIL-I-8846

SUPERSEDES: MS21208 IN PART

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.

* U.S. GOVERNMENT PRINTING OFFICE: 1976—603-766/3403