
FED. SUP CLASS
5340

MS124731 THRU MS124770

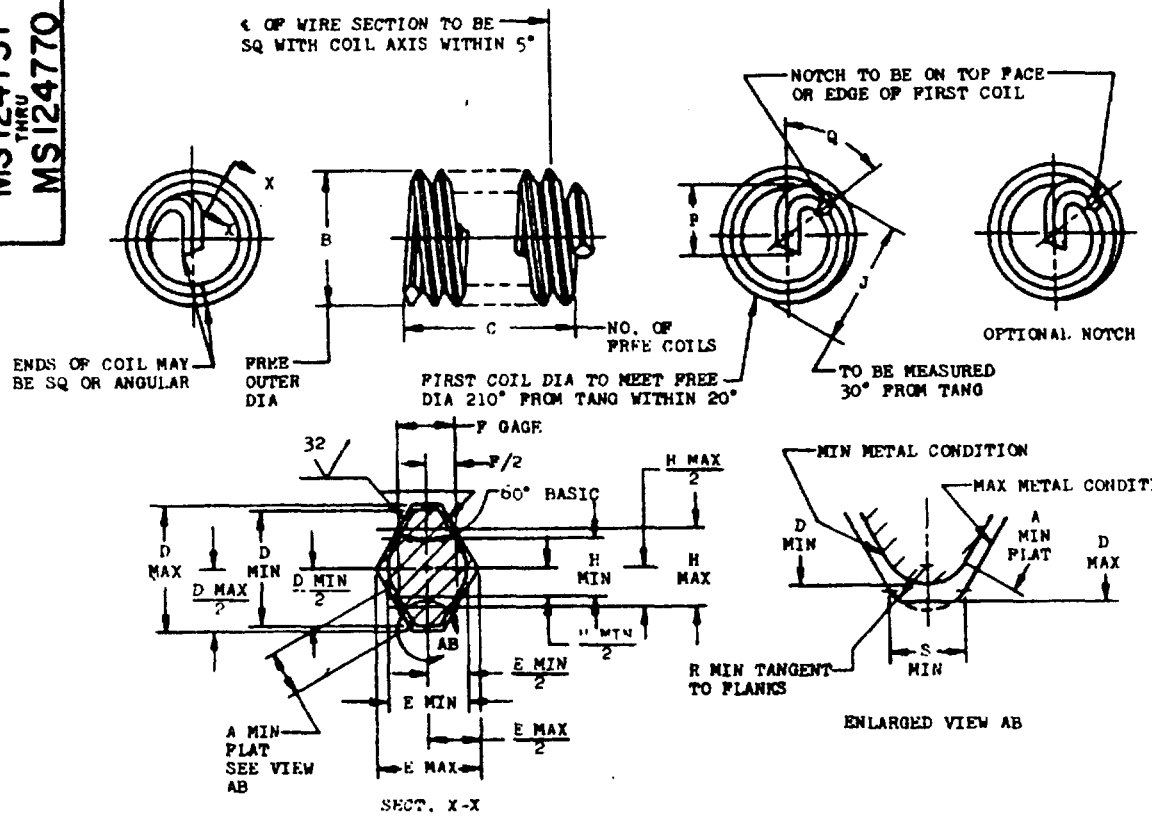

(D)

THREAD SIZE	** NOMINAL LENGTH	A MIN	B MIN	B MAX	C* ±.250 COIL	D MIN	D MAX	E MIN	E MAX	F GAGE	H MIN	H MAX
.099 -56	.198	.0027	.131	.146	8.000	.0163	.0193	.0126	.0156	.00893	.0112	.0116
.112 -48	.224	.0043	.147	.162	7.875	.0196	.0226	.0152	.0182	.01042	.01313	.01353
.138 -40	.276	.0068	.173	.193	8.375	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.164 -36	.328	.0059	.204	.224	9.125	.0261	.0301	.0203	.0243	.01389	.01764	.01804
.190 -32	.380	.0076	.236	.256	9.500	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.250 -28	.500	.0085	.306	.326	11.375	.0347	.0387	.0253	.0313	.01786	.02270	.02320
.3125-24	.625	.0120	.380	.400	12.250	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.375 -24	.750	.0120	.448	.468	15.000	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.4375-20	.875	.0164	.524	.544	14.625	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.500 -20	1.000	.0164	.592	.617	16.875	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.5625-18	1.125	.0176	.666	.691	17.125	.0560	.0600	.0446	.0486	.02778	.03558	.03608
.625 -18	1.250	.0176	.733	.758	19.250	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.750 -16	1.500	.0215	.876	.901	20.625	.0636	.0677	.0477	.0547	.03125	.04009	.04059
.875 -14	1.750	.0267	1.021	1.051	21.125	.0730	.0770	.0545	.0625	.03571	.04589	.04639
1.000 -12	2.000	.0334	1.164	1.199	20.500	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.000 -14(b)	2.000	.0267	1.156	1.186	24.250	.0730	.0770	.0545	.0625	.03571	.04589	.04639
1.125 -12	2.250	.0334	1.304	1.334	27.375	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.250 -12	2.500	.0334	1.439	1.469	26.250	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.375 -12	2.750	.0334	1.575	1.610	28.875	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.500 -12	3.000	.0334	1.710	1.745	31.625	.0861	.0900	.0649	.0729	.04167	.05363	.05413

(D) FOR CHANGES SEE SHEETS 1 AND 2.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11 Other Cust Army - AV Navy - AS	TITLE: INSERT, CRES HELICAL COIL FINE THREAD, 2 DIA NOMINAL LENGTH	MILITARY STANDARD MS 124731 THRU 124770	
PROCUREMENT SPECIFICATION: MIL-I-8846	SUPERSEDES: MS21208 IN PART	SHEET 1 OF 2	

APPROVED 29 May 53 — REVISED (A) 26 May 59 (B) 24 Oct 66 (C) 5 Oct 69 (D) 24 Feb 76

User: Army - EI, ME, MI, MU; Navy - MC, OS; Air Force -

Review activit. Army - WC; Navy -; Air Force - 82

This ...ary standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Project No. 5340-2006

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5340

User: Army - EL, ME, MI, MU
Navy - MC, OS
Air Force -

Review activities: Army - WC
Navy -
Air Force - 82

(D) THREAD SIZE	J MIN	J MAX	P MIN	P MAX	Q	R MIN	S MIN	APPROX WEIGHT LB/100	PART NUMBERS NOTCHED	PART NUMBERS UNNOTCHED(a)
.099 -56	.124	.146	.072	.090	75° -150°	.0032	.0056	.0117	MS124750	
.112 -48	.134	.150	.080	.095	75° -150°	.0038	.0065	.0222	MS124751	
.138 -40			.100	.130	25° -100°	.0045	.0078	.0408	MS124733	MS124753
.164 -36			.117	.147	20° -100°	.0050	.0087	.0680	MS124734	MS124754
.190 -32			.130	.176	15° - 90°	.0060	.0098	.112	MS124735	MS124755
.250 -28			.173	.239	15° - 70°	.0064	.0112	.212	MS124736	MS124756
.3125-24	.359	.377	.203	.291	15° - 55°	.0075	.0130	.397	MS124737	MS124757
.375 -24	.422	.439	.235	.353	15° - 75°	.0075	.0130	.553	MS124738	MS124758
.4375-20	.494	.514	.281	.416	15° - 75°	.0090	.0156	.917	MS124739	MS124759
.500 -20	.556	.576	.313	.478	15° - 75°	.0090	.0156	1.234	MS124740	MS124760
.5625-18	.625	.645	.344	.541	15° - 75°	.0100	.0174	1.695	MS124741	MS124761
.625 -18	.688	.708	.375	.588	15° - 75°	.0100	.0174	2.083	MS124742	MS124762
.750 -16	.820	.840	.469	.562	15° - 75°	.0113	.0195	3.448	MS124743	MS124763
.875 -14	.955	.980	.500	.640	15° - 75°	.0129	.0223	5.263	MS124744	MS124764
1.000 -12	1.094	1.119	.626	.728	15° - 75°	.0150	.0260	8.188	MS124731	
1.000 -14(b)	1.080	1.105	.526	.750	15° - 75°	.0129	.0223	6.667	~~MS124745~~	MS124765
1.125 -12	1.219	1.244	.557	.819	10° - 70°	.0150	.0260	10.227	MS124746	MS124766
1.250 -12	1.344	1.369	.674	.941	10° - 70°	.0150	.0260	12.750	MS124747	MS124767
1.375 -12	1.469	1.494	.689	1.001	10° - 70°	.0150	.0260	15.194	MS124748	MS124768
1.500 -12	1.594	1.624	.811	1.123	10° - 70°	.0150	.0260	18.501	MS124749	MS124769

** 1. NOMINAL LENGTH EQUALS BASIC THICKNESS OF PLATE FOR INSERT ASSEMBLY.
2. ASSEMBLED LENGTH OF INSERT TO BE AS SPECIFIED ON MS33537.
* 3. NUMBER OF FREE COILS TO BE COUNTED AND ASSEMBLED LENGTH OF INSERT TO BE MEASURED 90° FROM TANG.
4. MATERIAL: STEEL. CORROSION RESISTANT, AMS 7245 (MATERIAL AND MFG).
5. SURFACE TEXTURE: ANSI B46.1-1962
6. INSERT, WHEN ASSEMBLED IN TAPPED HOLE AS SPECIFIED IN MS33537, SHALL PRODUCE A FINISHED THD MEETING ALL REQUIREMENTS OF MIL-S-7742 AND SHALL ACCEPT EXTERNAL MIL-S-8879 THREADS.
7. DIMENSIONS IN INCHES.
8. IDENTIFICATION: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
9. DO NOT USE UNASSIGNED PART NUMBERS.
(a) UNNOTCHED INSERTS INACTIVE FOR DESIGN AFTER 15 OCT 1969. USE NOTCHED INSERTS. NOTCHED INSERTS CAN UNIVERSALLY REPLACE INACTIVATED INSERTS, BUT THE INACTIVATED INSERTS CANNOT REPLACE THE SUPERSEDING NOTCHED INSERTS.
(b) MS124745 INACTIVE FOR DESIGN AFTER 15 OCTOBER 1969. NO SUPERSEDING STANDARD.

APPROVED 29 May 53 REVISED (A) 26 May 59 (B) 24 Oct 66 (D) FOR CHANGES SEE SHEETS 1 AND 2.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11
Other Cust Army - AY
Navy - AS

TITLE: INSERT, SRES HELICAL COIL FINE THREAD, 2 DIA NOMINAL LENGTH

MILITARY STANDARD
MS 124731 THRU 124770

PROCUREMENT SPECIFICATION: MIL-I-8846
SUPERSEDES: MS21208 IN PART
SHEET 2 OF 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.