

FED. SUP CLASS
5950


## CASE, MOUNTING TERMINAL ARRANGEMENT AND MARKING

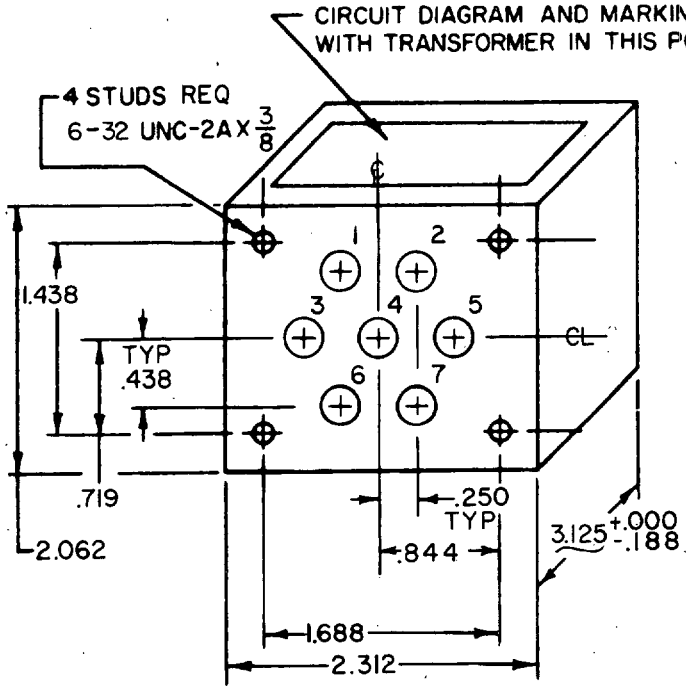


MINIMUM CHASSIS CUTOUT

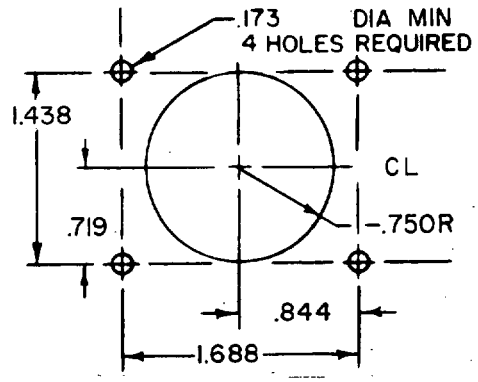


CIRCUIT DIAGRAM AND MARKING

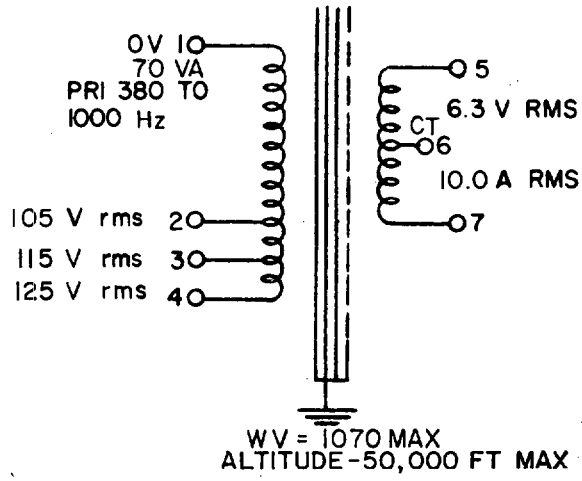


| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .173 | 4.39 | .750 | 19.05 |
| .188 | 4.78 | .844 | 21.44 |
| .250 | 6.35 | 1.438 | 36.53 |
| 3/8 | 9.53 | 1.688 | 42.88 |
| .438 | 11.13 | 2.062 | 52.40 |
| .500 | 12.70 | 2.312 | 58.75 |
| .719 | 18.26 | 3.125 | 79.38 |

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 23 JUNE 1981
NO SUPERSEDING STANDARD

NOTES:
1. All dimensions in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on case dimensions is +.000(.00 mm), -.125(3.18 mm).
4. Tolerance on mounting dimensions is ±.016(.41 mm). Mounting studs are symmetrically located with respect to the centerline of the case.
5. Tolerance on terminal position dimensions is ±.031(.79 mm). Terminals fit within minimum chassis cutout.
6. Type designation, MS part number and manufacturer's name or symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over document referenced herein.

| MS PART NO. | TYPE DESIGNATION |
|---|---|
| MS16472-1 | TF4SX01FA208 |

Ⓒ denotes changes

APPROVED 18 OCT 1956 REVISED Ⓐ 18 MAR 1966 Ⓑ 23 JUNE 1981 Ⓒ 2 June 1982

User activities: Army - MI, Navy - MC, CG, Air Force - 19, 14

Review activities: Army - AR, Navy -, Air Force - 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P.A EC<br>Other Cust ER<br>AF-85 | International interest | TITLE<br>TRANSFORMER, POWER, STEP-DOWN,<br>TYPE TF4SX01FA208 | MILITARY STANDARD<br>MS 16472 |
| Procurement Specification<br>MIL-T-27 | | SUPERSEDES: | PAGE 1 OF 2 |

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:57Z
Check the source to verify that this is the current version before use.

5950-0599-4

User activities: Army - Navy - Air Force -
Review activities: Army - Navy - Air Force -

## ELECTRICAL RATING

Primary (1–2–3–4): 70 v amp, 105/115/125 v rms, 380 to 1,000 Hz
Secondary (5–6–7): 6.3 v rms ct, 10.0 amp rms

Duty cycle - - - - - - - - - - - - - - Continuous
Life expectancy - - - - - - - - - - - 10,000 hr min
Working voltage - - - - - - - - - - - 1,070 v max
Altitude - - - - - - - - - - - - - - - 50,000 feet max
Operating temperature - - - - - - - 130° C max

Note: When numbers in parentheses, eg (1–4) are used, they indicate the winding and the extreme terminals of the winding.

## PHYSICAL CHARACTERISTICS

Case size - - - - - - - - - - - - - - - - - - - - - FA
Weight - - - - - - - - - - - - - - - - - - - - - - 1.75 lb max
Terminals - - - - - - - - - - - - - - - - - - - - Turret, standoff type
Terminal height - - - - - - - - - - - - - - - - - 0.813 (20.65 mm) max
Shock - - - - - - - - - - - - - - - - - - - - - - Method I, test condition C (50G)

| TEST | ELECTRICAL PROPERTIES | | | LIMITS |
|---|---|---|---|---|
| Dielectric withstanding voltage: | Windings | (1–4) | (5–7) | |
| At sea level | Volts rms | 2,500 | 2,500 | -- |
| At reduced barometric pressure | Volts rms | 1,340 | 1,340 | |
| No load | With 105 v, 400 Hz across (1–2): Current in (1–2): 0.350 amp<br>Power in (1–2): 5.0 watts<br>Voltage across (5–7): 6.54 v rms ct | | | Max<br>Max<br>±2% |
| Rated load | With 105/115/125 v, 380 to 1,000 Hz across (1-2-3-4): Voltage across (5–7): 6.3 v rms ct, 10.0 amp rms | | | ±2% |
| Electrostatic shielding | Voltage ratio: 5 to 1 at 20 kc | | | Min |
| DC resistance | (1–4): 2.00 ohms<br>(5–7): 0.014 ohms | | | Max |
| Temperature rise | 40° C with 105 v rms, 400 Hz across (1–2) at an ambient temperature of 90° C | | | Max |

(C)

Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B test of MIL-T-27 shall be applicable.

APPROVED 18 OCT 1956
REVISED (A) 18 MAR 1966 (B) 23 JUNE 81 (C) FOR CHANGES SEE PAGE 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A EC<br>Other Cust ER<br>AF-85 | International interest | TITLE<br>TRANSFORMER, POWER, STEP-DOWN, TYPE TF4SX01FA208 | MILITARY STANDARD<br>MS16472 |
|---|---|---|---|
| Procurement Specification<br>MIL-T-27 | | SUPERSEDES: | PAGE 2 OF 2 |



Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:57Z
Check the source to verify that this is the current version before use.