


FED. SUP CLASS
5315

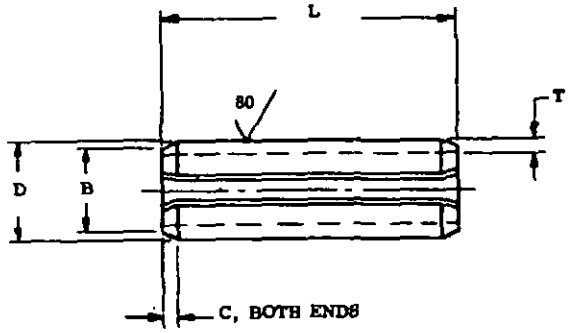


*APPROXIMATE
MIN AVERAGE DIA.
$= \frac{D_1+D_2+D_3}{3}$



ALTERNATE
END DESIGN

TABLE I

| NOM SIZE | D DIA MAX | D DIA MIN AVG | C CHAMFER MAX | C CHAMFER MIN | B CHAMFER DIA MAX | T WALL THICKNESS NOM | DOUBLE SHEAR STRENGTH LBS-MIN | RECOMMENDED HOLE SIZE MAX | RECOMMENDED HOLE SIZE MIN |
|---|---|---|---|---|---|---|---|---|---|
| .062 | .069 | .066 | .026 | .007 | .059 | .012 | 425 | .065 | .062 |
| .078 | .086 | .083 | .033 | .008 | .075 | .018 | 650 | .081 | .078 |
| .094 | .103 | .099 | .038 | .008 | .091 | .022 | 1,000 | .097 | .094 |
| .125 | .135 | .131 | .044 | .008 | .122 | .028 | 3,100 | .129 | .125 |
| .156 | .167 | .162 | .048 | .010 | .151 | .032 | 3,000 | .160 | .156 |
| .188 | .199 | .194 | .055 | .011 | .182 | .040 | 4,400 | .192 | .187 |
| .219 | .232 | .226 | .065 | .011 | .214 | .048 | 5,700 | .224 | .219 |
| .250 | .264 | .258 | .065 | .012 | .245 | .048 | 7,700 | .256 | .250 |
| .312 | .328 | .321 | .080 | .014 | .306 | .062 | 11,500 | .318 | .312 |
| .375 | .392 | .385 | .095 | .016 | .368 | .077 | 17,600 | .382 | .375 |
| .438 | .456 | .448 | .095 | .017 | .430 | .077 | 20,000 | .445 | .437 |
| .500 | .521 | .513 | .110 | .025 | .485 | .094 | 25,800 | .510 | .500 |

REQUIREMENTS:

1. MATERIAL: STEEL, CARBON, GRADES 1070 THRU 1095 (UNS G10700 THRU G10950) IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
   STEEL, CORROSION-RESISTANT, TYPES 410(UNS S41000) AND 420 (UNS S42000) IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. SURFACE ROUGHNESS: SURFACE ROUGHNESS SHALL BE IN ACCORDANCE WITH ANSI B46.1 BEFORE MEETING PROTECTIVE COATING AND SURFACE TREATMENT REQUIREMENT.
3. PROTECTIVE COATING AND SURFACE TREATMENT:
   CARBON STEEL-CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2.
   PHOSPHATE COATED IN ACCORDANCE WITH DOD-P-16232, TYPE Z, CLASS 2.
   CORROSION-RESISTANT STEEL-CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH ASTM A380.
4. HARDNESS: CARBON STEEL-46 TO 53 HRC.
   CORROSION-RESISTANT STEEL-43 TO 52 HRC.
5. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE II.
   EXAMPLE: MS16562-1
   -1 — DASH NUMBER
   MS16562 — BASIC MS NUMBER
   MS16562-1 = PIN, SPRING-TUBULAR, SLOTTED, .062 NOMINAL SIZE, .188 LENGTH, CARBON STEEL, CADMIUM PLATED.

© ENTIRE STANDARD REVISED

APPROVED 24 JUL 1959 REVISED © 14 MAR 86

| | | |
|---|---|---|
| P.A. AR<br>Other Cust OS<br>99 | TITLE<br>PIN, SPRING - TUBULAR, SLOTTED | MILITARY STANDARD<br>MS16562 |
| PROCUREMENT SPECIFICATION<br>MIL-P-10971 | SUPERSEDES: | PAGE 1 OF 4 |

AMSC N/A DD FORM (MAR 72) 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — 5315-0419 — PLATE NO. 23566

User activities:
Navy - MC, SH

Review activities:
ARMY - AV, ME, MI
DLA - ES
NSA-NS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5315

NOTES:-

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

Review activities:
ARMY - AV, ME, MI
DLA - IS
NSA - NS

User activities:
MC, SH

APPROVED REVISED © FOR CHANGES SEE PAGES 1, 2, 3 AND 4

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | |
|---|---|---|
| P.A. AR<br>Other Cust OS<br>99 | TITLE<br>PIN, SPRING-TUBULAR, SLOTTED | MILITARY STANDARD<br>MS16562 |
| PROCUREMENT SPECIFICATION | SUPERSEDES: | PAGE 2 OF 4 |

DD FORM 1 SEP 87 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5315-0419

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5315

TABLE II

| L LENGTH | TOL | CARBON STEEL CADMIUM PLATED DASH NO. | CARBON STEEL PHOSPHATE COATED DASH NO. | CORROSION RESISTANT STEEL DASH NO. |
|---|---|---|---|---|
| **.062 NOMINAL SIZE** | | | | |
| .188 | ±.015 | 1 | 95 | 189 |
| .250 | | 2 | 96 | 190 |
| .312 | | 3 | 97 | 191 |
| .375 | | 4 | 98 | 192 |
| .438 | | 5 | 99 | 193 |
| .500 | | 6 | 100 | 194 |
| .562 | | 7 | 101 | 195 |
| .625 | | 8 | 102 | 196 |
| .688 | | 9 | 103 | 197 |
| .750 | | 10 | 104 | 198 |
| **.078 NOMINAL SIZE** | | | | |
| .250 | ±.015 | 11 | 105 | 199 |
| .312 | | 12 | 106 | 200 |
| .375 | | 13 | 107 | 201 |
| .438 | | 14 | 108 | 202 |
| .500 | | 15 | 109 | 203 |
| .562 | | 16 | 110 | 204 |
| .625 | | 17 | 111 | 205 |
| .750 | | 18 | 112 | 206 |
| .875 | | 19 | 113 | 207 |
| 1.000 | | 20 | 114 | 208 |
| **.094 NOMINAL SIZE** | | | | |
| .250 | ±.015 | 21 | 115 | 209 |
| .312 | | 22 | 116 | 210 |
| .375 | | 23 | 117 | 211 |
| .438 | | 24 | 118 | 212 |
| .500 | | 25 | 119 | 213 |
| .562 | | 26 | 120 | 214 |
| .625 | | 27 | 121 | 215 |
| .750 | | 28 | 122 | 216 |
| .875 | | 29 | 123 | 217 |
| 1.000 | | 30 | 124 | 218 |
| **.125 NOMINAL SIZE** | | | | |
| .375 | ±.015 | 31 | 125 | 219 |
| .438 | | 32 | 126 | 220 |
| .500 | | 33 | 127 | 221 |
| .562 | | 34 | 128 | 222 |
| .625 | | 35 | 129 | 223 |
| .750 | | 36 | 130 | 224 |
| .875 | | 37 | 131 | 225 |
| 1.000 | | 38 | 132 | 226 |
| 1.250 | ±.020 | 39 | 133 | 227 |
| **.156 NOMINAL SIZE** | | | | |
| .500 | ±.015 | 40 | 134 | 228 |
| .625 | | 41 | 135 | 229 |
| .750 | | 42 | 136 | 230 |
| .875 | | 43 | 137 | 231 |
| 1.000 | | 44 | 138 | 232 |
| 1.250 | ±.020 | 45 | 139 | 233 |

| L LENGTH | TOL | CARBON STEEL CADMIUM PLATED DASH NO. | CARBON STEEL PHOSPHATE COATED DASH NO. | CORROSION-RESISTANT STEEL DASH NO. |
|---|---|---|---|---|
| **.188 NOMINAL SIZE** | | | | |
| .500 | ±.015 | 46 | 140 | 234 |
| .625 | | 47 | 141 | 235 |
| .750 | | 48 | 142 | 236 |
| .875 | | 49 | 143 | 237 |
| 1.000 | ±.020 | 50 | 144 | 238 |
| 1.250 | | 51 | 145 | 239 |
| 1.500 | | 52 | 146 | 240 |
| 1.750 | | 53 | 147 | 241 |
| **.219 NOMINAL SIZE** | | | | |
| .750 | ±.015 | 54 | 148 | 242 |
| .875 | | 55 | 149 | 243 |
| 1.000 | | 56 | 150 | 244 |
| 1.250 | ±.020 | 57 | 151 | 245 |
| 1.500 | | 58 | 152 | 246 |
| 1.750 | | 59 | 153 | 247 |
| 2.000 | | 60 | 154 | 248 |
| 2.500 | ±.025 | 61 | 155 | 249 |
| **.250 NOMINAL SIZE** | | | | |
| .750 | ±.015 | 62 | 156 | 250 |
| .875 | | 63 | 157 | 251 |
| 1.000 | | 64 | 158 | 252 |
| 1.250 | ±.020 | 65 | 159 | 253 |
| 1.500 | | 66 | 160 | 254 |
| 1.750 | | 67 | 161 | 255 |
| 2.000 | | 68 | 162 | 256 |
| 2.500 | ±.025 | 69 | 163 | 257 |
| **.312 NOMINAL SIZE** | | | | |
| 1.000 | ±.015 | 70 | 164 | 258 |
| 1.250 | ±.020 | 71 | 165 | 259 |
| 1.500 | | 72 | 166 | 260 |
| 1.750 | | 73 | 167 | 261 |
| 2.000 | | 74 | 168 | 262 |
| 2.500 | ±.025 | 75 | 169 | 263 |
| 3.000 | | 76 | 170 | 264 |
| **.375 NOMINAL SIZE** | | | | |
| 1.000 | ±.015 | 77 | 171 | 265 |
| 1.250 | ±.020 | 78 | 172 | 266 |
| 1.500 | | 79 | 173 | 267 |
| 1.750 | | 80 | 174 | 268 |
| 2.000 | | 81 | 175 | 269 |
| 2.500 | ±.025 | 82 | 176 | 270 |
| 3.000 | | 83 | 177 | 271 |

© FOR CHANGES SEE PAGES 1, 2, 3 AND 4

APPROVED 24 JUL 1959

User activities: MC, SH

Review activities: ARMY – AV, ME, MI; DLA - IS; NSA-NS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AR
Other Cust OS 99

TITLE: PIN, SPRING - TUBULAR, SLOTTED

PROCUREMENT SPECIFICATION: MIL-P-10971

SUPERSEDES:

MILITARY STANDARD
MS16562



DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5315-0419

PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5315

TABLE II. (Continued)

| L LENGTH | TOL | CARBON STEEL | | CORROSION RESISTANT STEEL |
|---|---|---|---|---|
| | | CADMIUM PLATED | PHOSPHATE COATED | |
| | | DASH NO. | DASH NO. | DASH NO. |
| .438 NOMINAL SIZE | | | | |
| 1.250 | ±.020 | 84 | 178 | 272 |
| 1.500 | | 85 | 179 | 273 |
| 1.750 | | 86 | 180 | 274 |
| 2.000 | | 87 | 181 | 275 |
| 2.500 | ±.025 | 88 | 182 | 276 |
| 3.000 | | 89 | 183 | 277 |
| .500 NOMINAL SIZE | | | | |
| 1.500 | ±.020 | 90 | 184 | 278 |
| 1.750 | | 91 | 185 | 279 |
| 2.000 | | 92 | 186 | 280 |
| 2.500 | ±.025 | 93 | 187 | 281 |
| 3.000 | | 94 | 188 | 282 |

User activities:
MC, SH

Review activities:
ARMY - AV, ME, MI
DLA - IS
NSA - NS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 24 JUL 1959 © FOR CHANGES SEE PAGES 1, 2, 3 AND 4

| P.A. AR | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust OS 99 | PIN, SPRING - TUBULAR, SLOTTED | MS16562 |
| PROCUREMENT SPECIFICATION MIL-P-10971 | SUPERSEDES | PAGE 4 OF 4 |

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5315-0419 PLATE NO. 23085

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:58Z
Check the source to verify that this is the current version before use.