
MS 172201 (ASG) THRU MS 172235

FED. SUP CLASS 3110

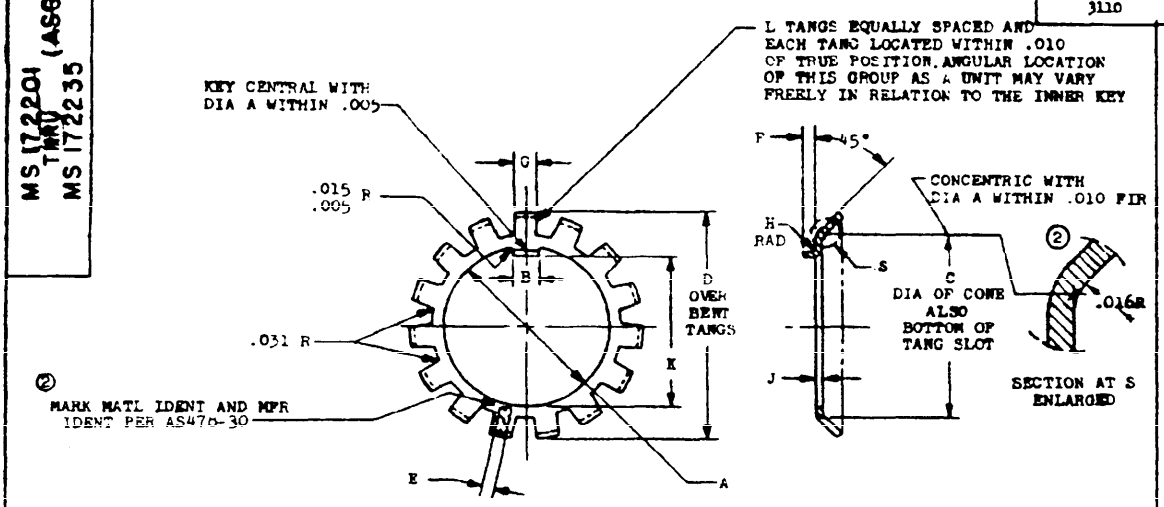


| NOMINAL BEARING BORE DIA | A | B | C +.020 -.000 | D +.000 -.030 | E ±.030 | F | G | H | J | K +.020 -.000 | L | EST WT LB | PART NO. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| .3937 | .406-.421 | .110-.120 | .531 | .828 | .060 | .062-.094 | .084-.104 | .016 | .036-.044 | .333 | 9 | .003 | MS172201 |
| .4724 | .484-.499 | .110-.120 | .625 | .922 | .060 | .062-.094 | .084-.104 | .016 | .036-.044 | .411 | 9 | .004 | MS172202 |
| .5906 | .601-.616 | .110-.120 | .750 | 1.094 | .060 | .062-.094 | .084-.104 | .016 | .036-.044 | .515 | 11 | .005 | MS172203 |
| .6693 | .679-.694 | .110-.120 | .875 | 1.203 | .060 | .062-.094 | .084-.104 | .016 | .036-.044 | .591 | 11 | .006 | MS172204 |
| (a).7874 | .801-.816 | .156-.176 | .969 | 1.344 | .080 | .062-.094 | .146-.166 | .016 | .036-.044 | .724 | 11 | .008 | MS172205 |
| .9843 | .989-1.009 | .156-.176 | 1.188 | 1.562 | .080 | .094-.125 | .146-.166 | .016 | .046-.054 | .880 | 13 | .013 | MS172206 |
| 1.1811 | 1.193-1.213 | .156-.176 | 1.438 | 1.859 | .080 | .094-.125 | .146-.166 | .031 | .046-.054 | 1.084 | 13 | .016 | MS172207 |
| 1.3780 | 1.396-1.416 | .156-.176 | 1.656 | 2.078 | .120 | .094-.125 | .146-.166 | .031 | .046-.054 | 1.287 | 15 | .019 | MS172208 |
| 1.5748 | 1.583-1.603 | .280-.300 | 1.844 | 2.250 | .120 | .094-.125 | .204-.234 | .031 | .058-.068 | 1.474 | 15 | .030 | MS172209 |
| 1.7717 | 1.792-1.817 | .280-.300 | 2.062 | 2.500 | .120 | .125-.156 | .204-.234 | .031 | .058-.068 | 1.693 | 17 | .037 | MS172210 |
| 1.9685 | 1.992-2.017 | .280-.300 | 2.250 | 2.688 | .120 | .125-.156 | .204-.234 | .031 | .058-.068 | 1.880 | 17 | .037 | MS172211 |
| 2.1654 | 2.182-2.207 | .280-.300 | 2.500 | 2.953 | .120 | .125-.156 | .204-.234 | .031 | .058-.068 | 2.067 | 17 | .042 | MS172212 |
| 2.3622 | 2.400-2.425 | .280-.300 | 2.688 | 3.188 | .120 | .125-.156 | .204-.234 | .047 | .058-.068 | 2.255 | 17 | .044 | MS172213 |
| 2.5591 | 2.588-2.613 | .280-.300 | 2.875 | 3.375 | .120 | .125-.156 | .204-.234 | .047 | .058-.068 | 2.443 | 19 | .048 | MS172214 |
| 2.7559 | 2.791-2.816 | .280-.300 | 3.094 | 3.594 | .120 | .188-.250 | .204-.234 | .047 | .058-.068 | 2.631 | 19 | .052 | MS172215 |
| 2.9528 | 2.973-3.003 | .280-.300 | 3.375 | 3.922 | .120 | .188-.250 | .297-.327 | .047 | .058-.068 | 2.813 | 19 | .077 | MS172216 |
| 3.1496 | 3.177-3.207 | .340-.360 | 3.594 | 4.141 | .120 | .188-.250 | .297-.327 | .047 | .058-.068 | 3.017 | 19 | .081 | MS172217 |
| 3.3465 | 3.395-3.425 | .340-.360 | 3.812 | 4.359 | .120 | .188-.250 | .297-.327 | .047 | .058-.068 | 3.220 | 19 | .084 | MS172218 |
| 3.5433 | 3.582-3.612 | .340-.360 | 4.000 | 4.547 | .120 | .188-.250 | .297-.327 | .047 | .058-.068 | 3.380 | 19 | .086 | MS172219 |
| 3.7402 | 3.800-3.830 | .340-.360 | 4.219 | 4.812 | .120 | .188-.250 | .297-.327 | .047 | .058-.068 | 3.579 | 19 | .092 | MS172220 |
| 3.9370 | 3.988-4.018 | .340-.360 | 4.406 | 5.000 | .120 | .250-.312 | .297-.327 | .047 | .058-.068 | 3.786 | 19 | .094 | MS172221 |
| 4.1339 | 4.192-4.222 | .340-.360 | 4.594 | 5.188 | .120 | .250-.312 | .360-.390 | .047 | .058-.068 | 4.071 | 19 | .104 | MS172222 |
| 4.3307 | 4.395-4.425 | .340-.360 | 4.812 | 5.406 | .120 | .250-.312 | .360-.390 | .047 | .058-.068 | 4.193 | 19 | .108 | MS172223 |
| .7874 | .801-.816 | .156-.176 | 1.000 | 1.375 | .080 | .062-.094 | .146-.166 | .016 | .036-.044 | .724 | 11 | .009 | MS172224 |

MATERIAL: STEEL AMS 6350
FINISH: PHOSPHATE TREATMENT AMS 2481
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.

(a) INACTIVE FOR NEW DESIGN AFTER 1 JAN 60 USE MS172224. For definition and application of drawing status notes, see ANA Bulletin No. 337.

② TRUE POSITION TOLERANCE SPECIFIED IS FOR MAXIMUM MATERIAL CONDITION.

② AS 4 AMS ARE SAE PUBLICATIONS.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENCE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 30 Jan 58 REVISED ① 20 Dec 57 ② 7 Sep 62

CUSTODIANS
Navy - Mc
P.A. USAF - AFSC

PROCUREMENT SPECIFICATION
None

# MILITARY STANDARD

② WASHER, KEY - SINGLE, BEARING RETAINING, AMS6350

MS 172201 THRU (ASG) MS 172235

SHEET 1 OF 1

MS FORM 1 NOV 58 233

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.