FED. SUP CLASS
5310

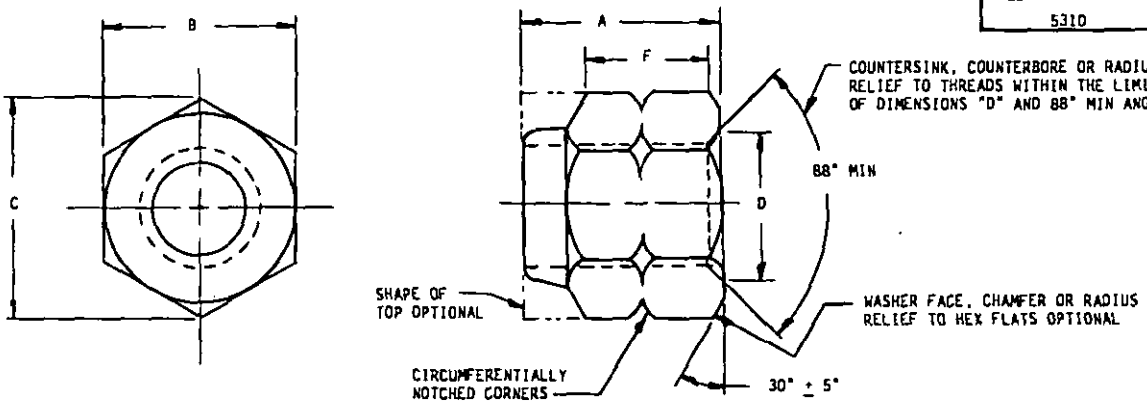


TABLE I

SIZE DASH NUMBER	THREAD	A MAX	A MIN	B MAX	B MIN	C MIN	D ±.020	F MIN	BEARING SURFACE SQ'NESS
-3C	10-24UNC-3B	.281	.208	.376	.367	.410	.210	.085	.006
-4C	1/4-20UNC-3B	.360	.240	.439	.430	.482	.273	.116	.007
-4F	1/4-28UNF-3B								
-5C	5/16-18UNC-3B	.360	.271	.502	.492	.552	.336	.123	.007
-5F	5/16-24UNF-3B								
-6C	3/8-16UNC-3B	.469	.318	.564	.553	.622	.398	.153	.008
-6F	3/8-24UNF-3B								
-7C	7/16-14UNC-3B	.469	.435	.690	.679	.766	.467	.178	.008
-7F	7/16-20UNF-3B								
-8C	1/2-13UNC-3B	.610	.575	.752	.741	.837	.531	.221	.009
-8F	1/2-20UNF-3B								
-9C	9/16-12UNC-3B	.704	.623	.877	.865	.978	.594	.243	.010
-9F	9/16-18UNF-3B								
-10C	5/8-11UNC-3B	.766	.732	.940	.928	1.051	.656	.274	.010
-10F	5/8-18UNF-3B								
-12C	3/4-10UNC-3B	.891	.855	1.064	1.052	1.191	.782	.316	.010
-12F	3/4-16UNF-3B								
-14C	7/8-9UNC-3B	1.016	.965	1.252	1.239	1.403	.918	.570	.011
-14F	7/8-14UNF-3B								
-16C	1-8UNC-3B	1.141	1.010	1.440	1.427	1.615	1.044	.635	.012
-16F	1-12UNF-3B								
-18C	1 1/8-7UNC-3B	1.266	1.130	1.627	1.614	1.826	1.171	.710	.013
(c) -18N08	~~1 1/8-8UN-3B~~								
-18F	1 1/8-12UNF-3B								
-20C	1 1/4-7UNC-3B	1.454	1.300	1.814	1.801	2.038	1.295	.795	.014
(c) -20N08	~~1 1/4-8UN-3B~~								
-20F	1 1/4-12UNF-3B								
-22C	1 3/8-6UNC-3B	1.609	1.547	2.008	1.973	2.232	1.447	.890	.015
(c) -22N08	~~1 3/8-8UN-3B~~								
-22F	1 3/8-12UNF-3B								
-24C	1 1/2-6UNC-3B	1.640	1.578	2.197	2.159	2.444	1.568	.980	.016
(c) -24N08	~~1 1/2-8UN-3B~~								
-24F	1 1/2-12UNF-3B								
-28C	1 3/4-5UNC-3B	2.376	2.250	2.762	2.715	3.075	1.818	1.250	.018
(c) -28N08	~~1 3/4-8UN-3B~~								
-32C	2-4 1/2UNC-3B	2.469	2.343	3.137	3.086	3.497	2.065	1.350	.020
(c) -32N08	~~2-8UN-3B~~								
-36C	2 1/4-4 1/2UNC-3B	2.876	2.750	3.514	3.457	3.918	2.328	1.600	.020
(c) -36N08	~~2 1/4-8UN-3B~~								
-40C	2 1/2-4UNC-3B	3.204	3.078	4.015	3.875	4.393	2.578	1.800	.020
(c) -40N08	~~2 1/2-8UN-3B~~								

(a) BEARING SURFACE SQUARENESS MEASURED IN ACCORDANCE WITH MIL-N-25027.
(E) (b) CIRCUMFERENTIAL NOTCHED CORNERS ARE FOR IDENTIFICATION ONLY. NOTCH SHALL NOT EXCEED "B" MINIMUM IN DEPTH.
(c) CANCELLED AFTER 29 MAY 1968.

(E) REVISED AND REDRAWN

APPROVED 5 APRIL 1962 REVISED (E) 30 JAN 1987

USER SYMBOLS:

REVIEWER SYMBOLS:
ARMY - AV
NAVY - AS, SH
USAF - 11, 82
DLA - IS

"Review/use information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY — AS Other Cust USAF - 11 ARMY - AV	SEE NOTE	NUT, SELF-LOCKING, HEXAGON, REGULAR HEIGHT, 250°F, (NON-METALLIC INSERT) NON-CORROSION-RESISTANT STEEL	MS17829
PROCUREMENT SPECIFICATION MIL-N-25027		SUPERSEDES: MIL-N-24129/2 (SHIPS), MS17829 (SHIPS)	SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 5310-1567

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

TABLE II

	SIZE DASH NUMBER	AXIAL STRENGTH POUNDS MIN	MINIMUM ULTIMATE WRENCH TORQUE (IN-LB)	WEIGHT LB/100 REF	MAXIMUM LOCKING TORQUE INSTALLATION OR REMOVAL (IN-LB)	MINIMUM BREAKAWAY TORQUE (IN-LB)
	-3C	(d) 2,010	40	.56	PER MIL-N-25027	PER MIL-N-25027
	-4C	4,770	85	.97		
	-4F	5,460	115			
	-5C	7,860	185	1.30		
	-5F	8,700	260			
	-6C	11,620	315	1.95		
	-6F	13,170	450			
	-7C	15,940	550	3.35		
	-7F	17,800	885			
	-8C	21,300	1,000	4.65		
	-8F	24,000	1,250			
	-9C	27,300	1,300	7.67		
	-9F	30,400	1,850			
	-10C	33,900	1,725	8.97		
	-10F	38,400	2,725			
	-12C	50,100	2,875	12.96		
	-12F	56,000	4,775			
	-14C	69,300	5,300	20.52		
	-14F	76,400	7,575			
	-16C	90,900	8,750	29.16		
	-16F	99,400	10,900			
(c)	-18C ~~-18N08~~	114,000	13,100	44.28	900	137.0 ~~137.0~~
	-18F	128,400	14,800			117.0
	-20C ~~-20N08~~	145,000	17,600	62.64	1000	165.0 ~~155.0~~
	-20F	161,000	20,000			143.0
(c)	-22C ~~-22N08~~	173,000 173,000		83.16	1200	200.0 ~~190.0~~
	-22F	197,000				180.0
(c)	-24C ~~-24N08~~	211,000		108.00	1400	230.0 ~~220.0~~
	-24F	237,200				210.0
(c)	-28C ~~-28N08~~	285,000		259.20	1800	300.0 ~~290.0~~
(c)	-32C ~~-32N08~~	375,000		334.80	2200	360.0 ~~345.0~~
(c)	-36C ~~-36N08~~	487,500		486.00	2600	430.0 ~~410.0~~
(c)	-40C ~~-40N08~~	600,000	20,000	735.50	3000	500.0 ~~480.0~~

(d) AXIAL STRENGTH FOR THREAD SIZE NO. 10-24UNC-3B NUTS IS BASED ON 125,000 P.S.I.

MATERIAL:

(E) 1. STEEL TYPE C1137 OF FED-STD-66 OR CARBON OR ALLOY STEEL MIL-S-1222, C1137 STEEL MAY CONTAIN FROM 0.15 TO 0.35 PERCENT LEAD.

(E) 2. THE INSERT SHALL BE IN ACCORDANCE WITH ASTM D4066, GROUP 1, CLASS 1, GRADE 1.

INTERNATIONAL INTEREST:

CERTAIN PROVISIONS (LIMITS FOR ACROSS FLATS DIMENSION) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD 17/2 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 5 APRIL 1962 REVISED (E) FOR CHANGES SEE SHEETS 2 AND 3

USER SYMBOLS:
REVIEWER SYMBOLS: ARMY - AV NAVY - AS, SH USAF - 11, 82 DLA - 15
"Review/user information is current as of the date of this document. For future coordination of changes in this document, draft circulation should be based on the information in the current DODISS."
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisitions used should be made from this document.
AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

LOCKING DEVICE: THE LOCKING DEVICE SHALL BE A RING OR COLLAR INSERT CAPABLE OF COMPLETELY CIRCUMFERENTIAL THREAD ENGAGEMENT FOR AT LEAST ONE FULL THREAD.

THREADS: THREADS SHALL BE "RIGHT-HAND", UNIFIED COARSE OR UNIFIED FINE IN ACCORDANCE WITH H-28, CLASS 3B FIT EXCEPT THAT MINOR DIAMETER REQUIREMENTS OF MIL-S-8879 MAY APPLY.

(E) PLATING: CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3, OR ZINC PLATE IN ACCORDANCE WITH ASTM-B-633-78, FE/Zn 8, TYPE II.

PERMANENT SET: NOT APPLICABLE TO SIZES LARGER THAN 1-1/4.

BREAK ALL SHARP EDGES AND REMOVE BURRS AND SLIVERS.

SURFACE ROUGHNESS IN ACCORDANCE WITH USAS B 46.1 1962. UNLESS OTHERWISE SPECIFIED THE SURFACE ROUGHNESS SHALL NOT EXCEED 125 MICROINCH.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

(E) EXAMPLE OF PART NUMBER: MS17829 - 3C

- 3C — DASH NUMBER FROM TABLE 1
- "-" DENOTES CADMIUM PLATE
- "Z" DENOTES ZINC PLATE
- MS17829 — STANDARD NUMBER

INTERCHANGEABILITY RELATIONSHIP: MS17829 NUTS ARE UNIVERSALLY INTERCHANGEABLE WITH MIL-N-24129/28 (SHIPS) AND MS24129 (SHIPS).

TABLE III

INTERCHANGEABILITY TABLE			
CANCELLED		UNIVERSALLY INTERCHANGEABLE	
MS17829 (SHIPS)	MIL-N-24129/28 (SHIPS)	MS17829	
----------	M24129/2- 3C	MS17829- 3C	
MS17829- 4C	M24129/2- 4C	MS17829- 4C	
MS17829- 4F	M24129/2- 4F	MS17829- 4F	
MS17829- 5C	M24129/2- 5C	MS17829- 5C	
MS17829- 5F	M24129/2- 5F	MS17829- 5F	
MS17829- 6C	M24129/2- 6C	MS17829- 6C	
MS17829- 6F	M24129/2- 6F	MS17829- 6F	
MS17829- 7C	M24129/2- 7C	MS17829- 7C	
MS17829- 7F	M24129/2- 7F	MS17829- 7F	
MS17829- 8C	M24129/2- 8C	MS17829- 8C	
MS17829- 8F	M24129/2- 8F	MS17829- 8F	
MS17829- 9C	M24129/2- 9C	MS17829- 9C	
MS17829- 9F	M24129/2- 9F	MS17829- 9F	
MS17829-10C	M24129/2-10C	MS17829-10C	
MS17829-10F	M24129/2-10F	MS17829-10F	
MS17829-12C	M24129/2-12C	MS17829-12C	
MS17829-12F	M24129/2-12F	MS17829-12F	
MS17829-14C	M24129/2-14C	MS17829-14C	
MS17829-14F	M24129/2-14F	MS17829-14F	
MS17829-16C	M24129/2-16C	MS17829-16C	
MS17829-16F	M24129/2-16F	MS17829-16F	
MS17829-18C	M24129/2-18C	MS17829-18C	
----------	M24129/2-18N08	~~MS17829-18N08~~	(E)
MS17829-18F	M24129/2-18F	MS17829-18F	
MS17829-20C	M24129/2-20C	MS17829-20C	
----------	M24129/2-20N08	~~MS17829-20N08~~	(E)
MS17829-20F	M24129/2-20F	MS17829-20F	
MS17829-22C	M24129/2-22C	MS17829-22C	
----------	M24129/2-22N08	~~MS17829-22N08~~	(E)
MS17829-22F	M24129/2-22F	MS17829-22F	
MS17829-24C	M24129/2-24C	MS17829-24C	
----------	M24129/2-24N08	~~MS17829-24N08~~	(E)
MS17829-24F	M24129/2-24F	MS17829-24F	
MS17829-28C	M24129/2-28C	MS17829-28C	
----------	M24129/2-28N08	~~MS17829-28N08~~	(E)
MS17829-32C	M24129/2-32C	MS17829-32C	
----------	M24129/2-32N08	~~MS17829-32N08~~	(E)
MS17829-36C	M24129/2-36C	MS17829-36C	
----------	M24129/2-36N08	~~MS17829-36N08~~	(E)
MS17829-40C	M24129/2-40C	MS17829-40C	
----------	M24129/2-40N08	~~MS17829-40N08~~	(E)

APPROVED 5 APRIL 1962 REVISED (E) FOR CHANGES SEE SHEETS 2 AND 3

USER SYMBOLS:

REVIEWER SYMBOLS:
ARMY - AV
NAVY - AS, SH
USAF - 11, 82
DLA - IS

"Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

P.A. NAVY — AS Other Cust USAF - 11 ARMY - AV	INTER-NATIONAL INTEREST SEE NOTE	TITLE: NUT, SELF-LOCKING, HEXAGON, REGULAR HEIGHT, 250°F, (NON-METALLIC INSERT) NON-CORROSION-RESISTANT STEEL	MILITARY STANDARD MS17829
PROCUREMENT SPECIFICATION MIL-N-25027		SUPERSEDES: MIL-N-24129/2 (SHIPS) MS17829 (SHIPS)	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.