

FED. SUP CLASS
8475

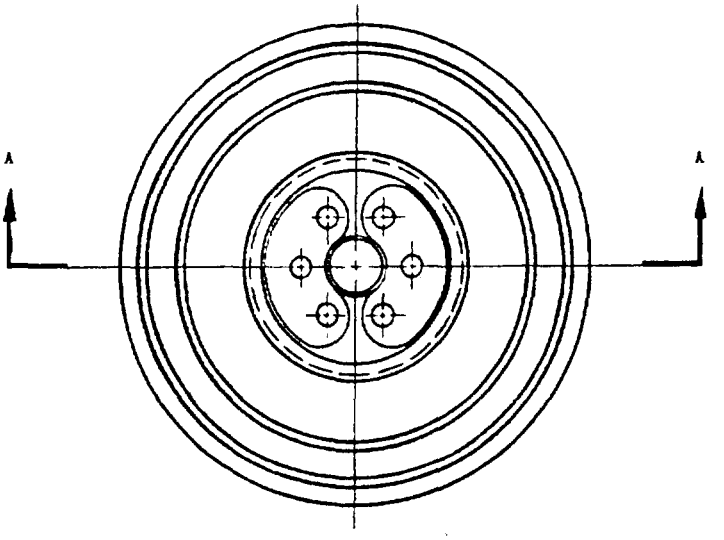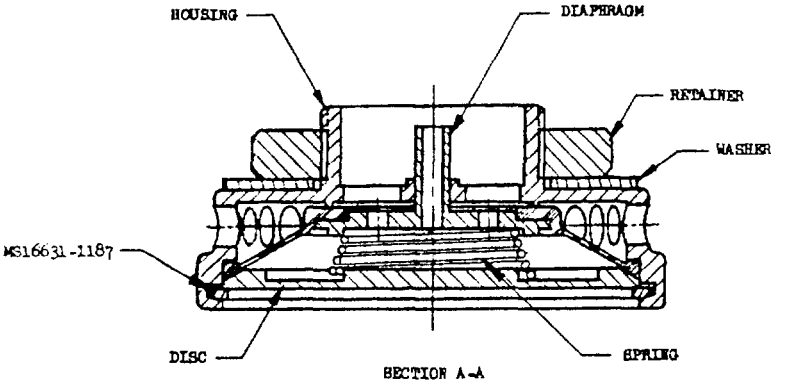


SECTION A-A

| DASH NO. |
|---|
| -1 |

NOTES:

1. MATERIAL: HOUSING, DIAPHRAGM GUIDE, RETAINER, WASHER, AND DISC, ALUMINUM ALLOY, 2017, TEMPER T4 IN ACCORDANCE WITH QQ-A-225/5.
   SPRING, CRES WIRE, FORM 1, COMPOSITION 302, CONDITION B, IN ACCORDANCE WITH QQ-W-423.
   DIAPHRAGM MOLDED MATERIAL, NEOPRENE, GRADE 40.
2. FINISH: HOUSING, DIAPHRAGM GUIDE, RETAINER, WASHER, AND DISC, ANODIZE, TYPE II IN ACCORDANCE WITH MIL-A-8625, NON-DYED.
   SPRING, CADMIUM PLATE, CLASS 1, TYPE 1 IN ACCORDANCE WITH QQ-P-416.
   FINISH FOR HOUSING, DIAPHRAGM GUIDE, RETAINER, WASHER, AND DISC SHALL BE 125/ ALL OVER, EXCEPT AS NOTED.
   SURFACE CONDITION FINISH DESIGNATIONS SHALL BE INTERPRETED IN ACCORDANCE WITH MIL-STD-10.
3. THREAD: THREAD DIMENSIONS AND DESIGNATIONS SHALL BE INTERPRETED IN ACCORDANCE WITH HANDBOOK H28 AND MIL-STD-9, RESPECTIVELY.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°.
6. USAGE: INTENDED FOR USE ON THE MK 5A ANTI-EXPOSURE SUIT TO PROVIDE AN OUTLET FOR VENTILATION AIR AFTER IT HAS CIRCULATED THROUGH THE SUIT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 27 APR 1965 REVISED

this standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


| P.A. NAVY-WP<br>Other Cust | TITLE<br>EXHAUST VALVE, VENTILATION | MILITARY STANDARD<br>MS17962(WP) |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | SHEET 1 OF 3 |


DD FORM 672-1

PLATE NO. 14938

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
8475

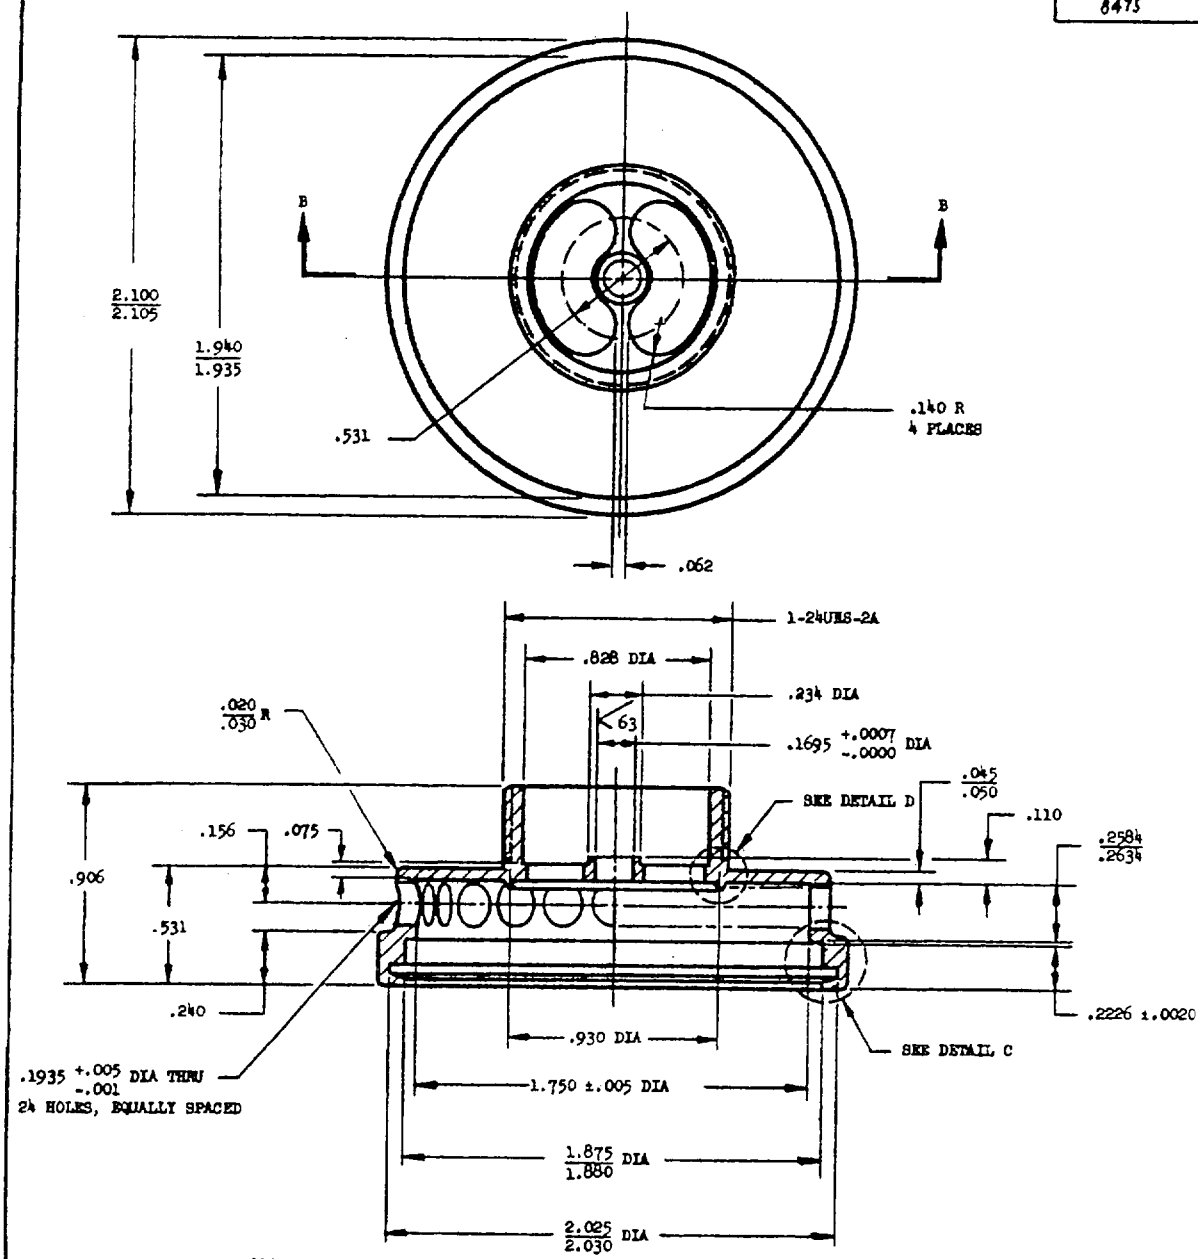

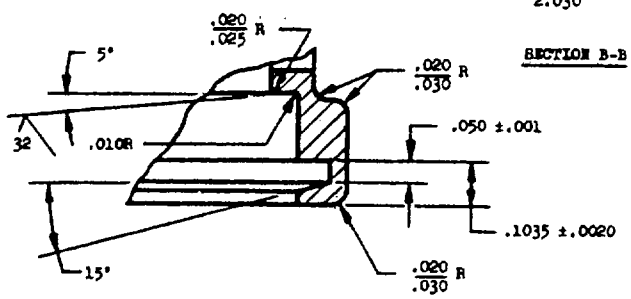
SECTION B-B

DETAIL C

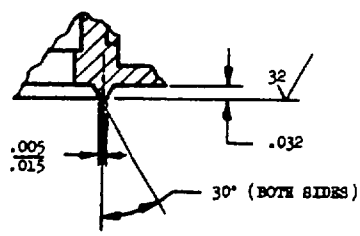


DETAIL D

HOUSING

APPROVED 27 APR 1965 REVISED

| | | |
|---|---|---|
| P.A. NAVY-WP<br>Other Cust | TITLE<br>EXHAUST VALVE, VENTILATION | MILITARY STANDARD<br>MS17962(WP) |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | SHEET 2 |


This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 672-1


PLATE NO. 14098

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
8475

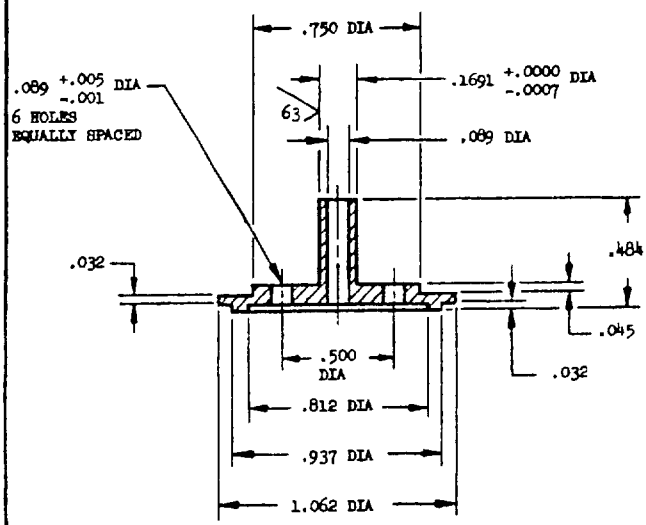



DIAPHRAGM GUIDE

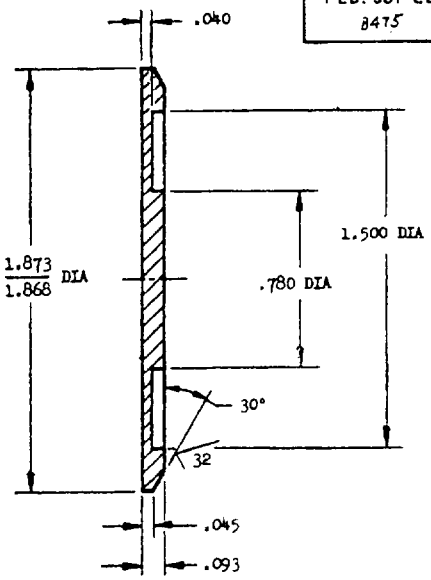



DISC

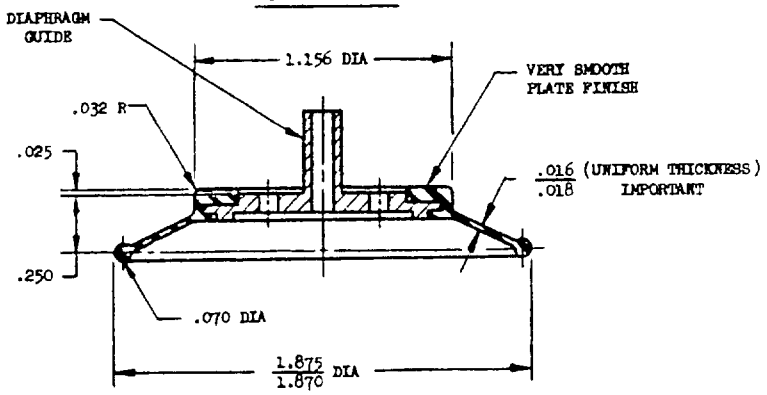


DIAPHRAGM

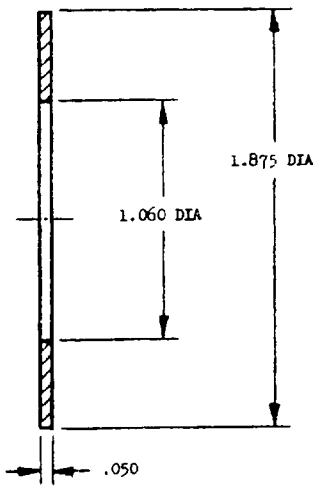



WASHER

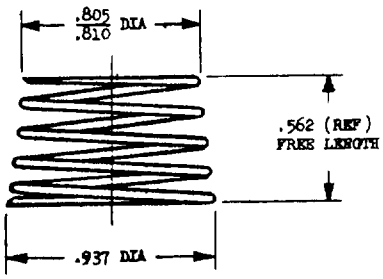


| | |
|---|---|
| DIAMETER OF WIRE | .022 |
| ACTIVE COILS | 4 |
| TOTAL NO. OF COILS | 4-1/2 |
| DIRECTION OF HELIX | OPTIONAL |
| TYPE OF ENDS | SQUARE OR CLOSED (NOT GROUND) |
| SPECIAL DATA | NORMALIZE, 400° F, 1-1/2 HOURS |

SPRING, CONICAL, COMPRESSION

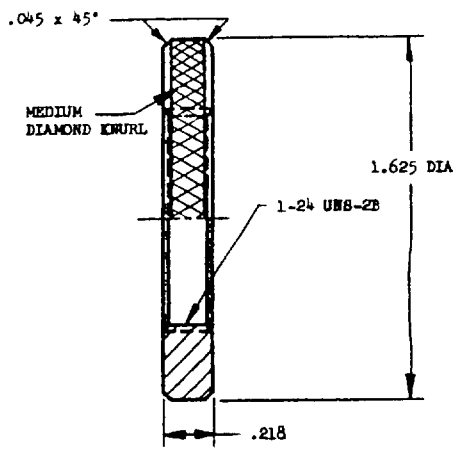


RETAINER

APPROVED 27 APR 1965 REVISED

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

| | | |
|---|---|---|
| P.A. NAVY-WP<br>Other Cust | TITLE<br>EXHAUST VALVE, VENTILATION | MILITARY STANDARD<br>MS17962(WP) |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | SHEET 3 |

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 14938

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.