
FED SUP CLASS
5935

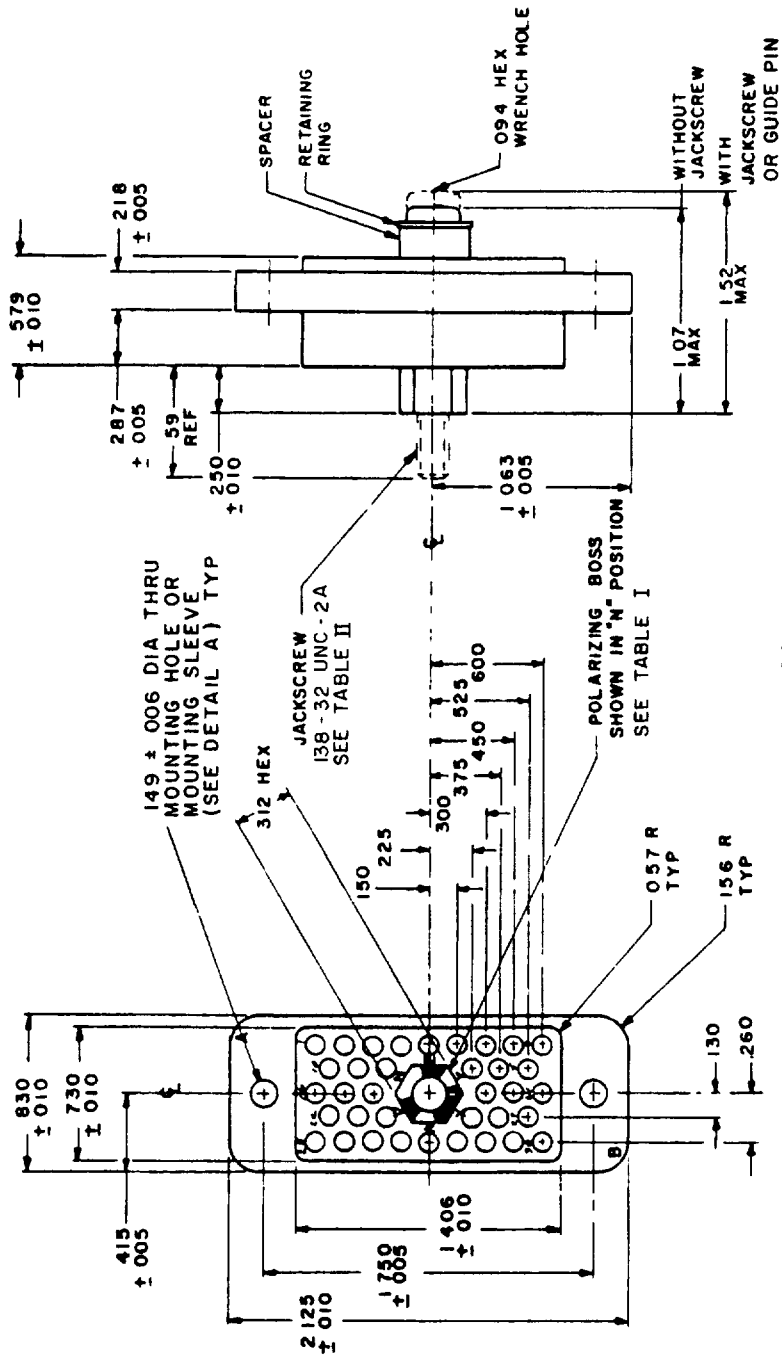

Design standard for use with MIL-C-28748/9

© Entire standard revised

APPROVED 20 Dec 1965 REVISED (A) 29 Jul 1968 (B) 20 May 1970 (C) 8 July 1976

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 99; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be kept to the minimum consistent with the requirement.

P A Navy - EC Other C s AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 36 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD MS 18159
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

TYPE
SEE TABLE I




TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II		
MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18159-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18159-1V	V (TYPE 1)	
MS 18159-1W	W (TYPE 1)	
MS 18159-1X	X (TYPE 2)	
MS 18159-1Y	Y (TYPE 2)	
MS 18159-1Z	Z (TYPE 2)	
MS 18159-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 138-32 UNC-2B
MS 18159-2V	V (TYPE 1)	
MS 18159-2W	W (TYPE 1)	
MS 18159-2X	X (TYPE 2)	
MS 18159-2Y	Y (TYPE 2)	
MS 18159-2Z	Z (TYPE 2)	

TABLE III		
MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18159-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18159-3V	V (TYPE 1)	
MS 18159-3W	W (TYPE 1)	
MS 18159-3X	X (TYPE 2)	
MS 18159-3Y	Y (TYPE 2)	
MS 18159-3Z	Z (TYPE 2)	
MS 18159-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ± .002 I.D. TO ACCEPT GUIDE PIN
MS 18159-4V	V (TYPE 1)	
MS 18159-4W	W (TYPE 1)	
MS 18159-4X	X (TYPE 2)	
MS 18159-4Y	Y (TYPE 2)	
MS 18159-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY

APPROVED 20 Dec 1965 REVISED © For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use still requires approval from this document.

P A Navy - EC	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 36 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD
Other Cust AF - 85 Army - EL			MS 18159
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 2 OF 3

DD FORM 1 SEP 83 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
001	03	312	92
002	05	340	8 64
005	13	375	9 53
006	15	415	10 54
010	25	450	11 43
057	1 45	525	13 34
094	2 39	579	14 71
130	3 30	590	14 99
138	3 51	.600	15 24
149	3 78	730	18 54
150	3 81	830	21 08
156	3 96	1 063	27 00
218	5 54	1 070	27 18
225	5 72	1 406	35 71
250	6 35	1 520	38 61
260	6 60	1 750	44 45
287	7 29	2 125	53 98
300	7 62		

NOTES:
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is ±.015 (.38 mm)
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm) Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm)
5. Contact hole details shall be in accordance with MIL-C-28748.
6. For mating connector see MS18160 (socket body)
7. Dimensions symmetrical about centerlines
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein
9. Reference documents shall be of the issue in effect on date of invitation for bid
10. Insert material shall be in accordance with MIL-C-28748
11. Flatness, squareness and parallelism shall be within dimensional tolerances
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert
13. Maximum insertion and withdrawal force (connector assembly) shall be 34 pounds.
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 3 inch pounds
15. Jackscrew wrench size 3 32 hex

User activities: Army ME, AV, WC; Navy MC; Air Force
Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA ES
Reviewer activities:
Military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use

APPROVED 20 Dec 1965 REVISED © For changes see sheets 1, 2 and 3

Preparing activity: Navy - EC Air Force - 85 Army - EL	International area	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 36 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD MS 18159
Agent activities: MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-2004-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.