DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

USER ACTIVITIES
ARMY-CR,MI
NAVY-OS

FED SUP CLASS
5310

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS SPECIFIED HEREIN

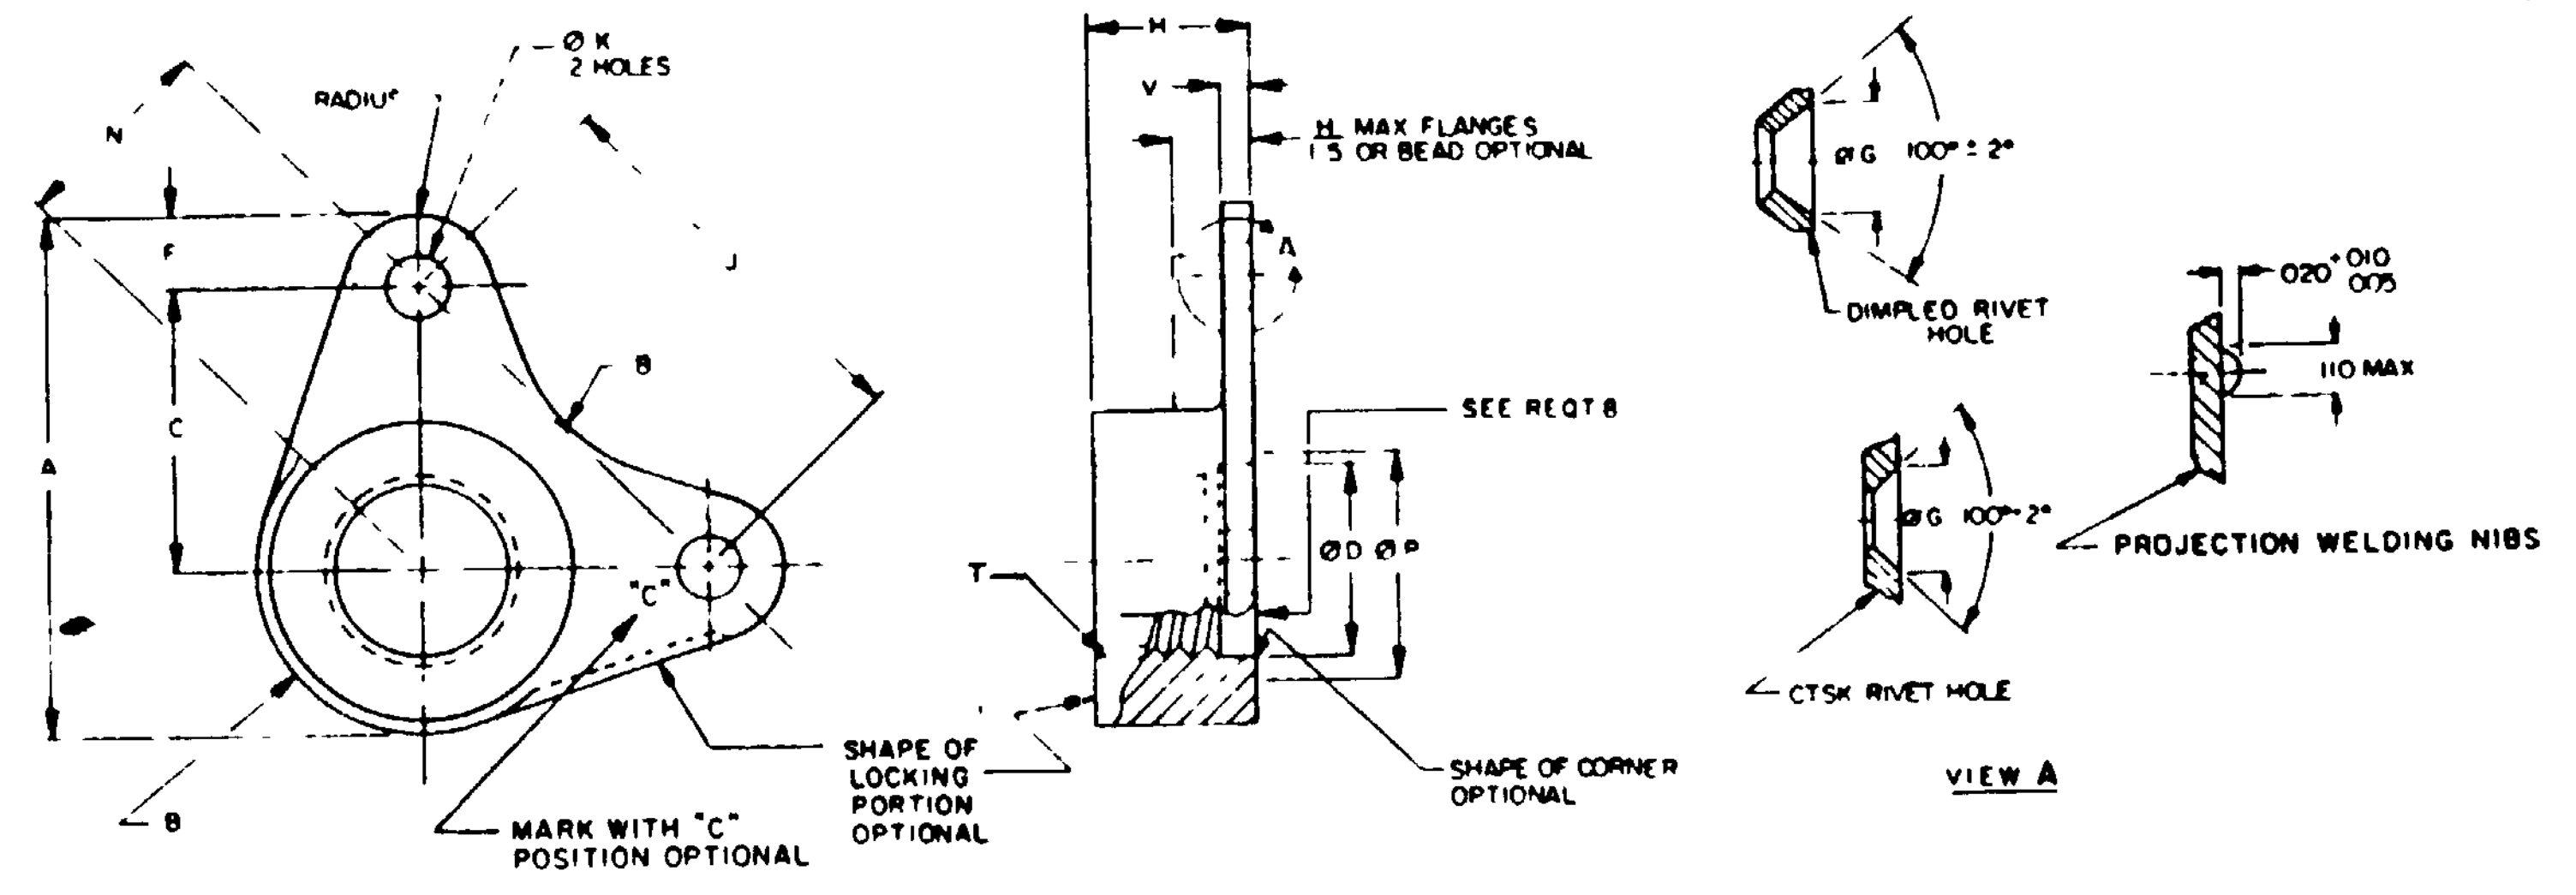

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBERS																					
450°F			800°F																		
PLAIN HOLES	CTSK OR DIMPLED HOLES	WELDING PROJECTION	PLAIN HOLES	CTSK OR DIMPLED HOLES	WELDING PROJECTION	T THREAD SIZES	A MAX	B MAX	B MIN	C ±.005	Ø D MIN	F MIN	Ø G ±.010	H 1/ MAX	J ±.002	Ø K 3/ +.005 -.000	N MAX	Ø P MAX	V MAX	AXIAL STRENGTH LBS/MIN	WEIGHT LBS/100
L02	—	L02W	-02	—	-02W	086-56 UNJC-3B	288	092	081	125	—	071	2/	110	177	066	120	130	035	440	07
L03	—	L03W	-03	—	-03W	099-48 UNJC-3B	318	125	092	138	—	071	2/	125	196	066	130	143	035	550	09
L04	L04R	L04W	-04	-04R	-04W	112-40 UNJC-3B	448	156	096	203	—	089	200	141	287	098	215	166	040	750	11
L06	L06R	L06W	-06	-06R	-06W	138-32 UNJC-3B	463	156	121	218	—	089	200	171	308	098	232	205	047	1,130	14
L08	L08R	L08W	-08	-08R	-08W	164-32 UNJC-3B	491	163	125	234	168	100	200	250	331	098	210	248	047	1,720	21
L3	L3R	L3W	-3	3R	3W	190-32 UNJF-3B	526	176	156	250	194	100	200	250	354	098	215	274	047	2,460	26
L4	L4R	L4W	-4	-4R	-4W	250-28 UNJF-3B	601	222	200	281	274	100	200	281	398	098	233	344	055	4 500	45
L5	L5R	L5W	-5	-5R	5W	3125-24 UNJF-3B	757	273	250	359	317	125	230	328	508	130	280	417	065	7 190	80
L6	—	L6W	-6	—	-6W	375-24 UNJF-3B	870	311	305	414	379	125	230	344	585	130	303	505	075	11 450	1 92

1/ MINIMUM "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
2/ SPACE WILL NOT PERMIT COUNTERSINK
3/ DIMPLED RIVET HOLE TOLERANCE FOR Ø "K" IS +.015 -.000

APPROVED 6 APR 64 REVISED Ⓕ 30 SEP 87

Ⓕ ENTIRE STANDARD REVISED

P.A. NAVY-AS
Other Cust. ARMY-AV
AIR FORCE-11

INTERNATIONAL INTEREST

TITLE
NUT, SELF-LOCKING, PLATE, CORNER, REDUCED RIVET SPACING, LOW HEIGHT, CRES, 125KSI Ftu, 450°F & 800°F

MILITARY STANDARD
MS21074

PROCUREMENT SPECIFICATION
MIL-N-25027

SUPERSEDES
NAS 698

PAGE 1 OF 3

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5310-1545

FED SUP CLASS
5310

REQUIREMENTS

1. MATERIAL: CORROSION RESISTANT STEEL, TYPE A286, (UNS S66286) IN ACCORDANCE WITH AMS5525, AMS5732 OR AMS5737

2. FINISH ONLY 800°F NUTS SILVER PLATE ALL THREADED SURFACES OF NUT ELEMENT IN ACCORDANCE WITH AMS 2410 THREADS SHALL SHOW COMPLETE COVERAGE SILVER PLATING ON ALL OTHER SURFACES OPTIONAL TARNISHING OR DISCOLORATION OF SILVER NOT CAUSE FOR REJECTION

3. LUBRICANT ONLY 450°F NUTS DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-N-25027

4. DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

5. HARDNESS 49HRC, MAX

6. THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879

7. SURFACE TEXTURE SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI B46 1

8. COUNTERBORE/COUNTERSINK ON SIZE 164 AND LARGER, THREAD RELIEF SHALL BE 062 MINIMUM, ON SIZE 138 AND SMALLER, COUNTERSINK OR RADIUSED WITHIN "P" DIAMETER.

9. PERFORMANCE SEE PROCUREMENT SPECIFICATION, EXCEPT 450°F DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES

10. PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS21074L4K

DASH NUMBER

BASIC MS NUMBER

MS21074L4K INDICATES NUT, SELF-LOCKING, PLATE, ONE LUG, REDUCED RIVET SPACING, LOW HEIGHT, CRES 125 KSI Ftu, 450°F, DRY FILM LUBRICATION, 250-28 UNJF-3B, COUNTERSUNK OR DIMPLED HOLES

NOTES

1. ALL DIMENSIONS ARE IN INCHES

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4. DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

USER ACTIVITIES
ARMY-CR, MI
NAVY-OS

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

APPROVED 6 APR 64 REVISED Ⓕ FOR CHANGES SEE PAGES 1, 2 AND 3

P A NAVY-AS Other Cust ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, CORNER, REDUCED RIVET SPACING, LOW HEIGHT, CRES, 125KSI Ftu, 450°F & 800°F	MILITARY STANDARD MS21074
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES: NAS 698		PAGE 2 OF 3

FED SUP CLASS
5310

INTERCHANGEABILITY RELATIONSHIP

MS21074 NUTS CAN UNIVERSALLY REPLACE NAS698 NUTS OF LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT), AND FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED OR COUNTERSUNK RIVET HOLES), BUT THESE NAS698 NUTS CANNOT UNIVERSALLY REPLACE MS21074 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS698CD02	MS21074-02
NAS698CD02M	MS21074L02
NAS698CD03	MS21074-03
NAS698CD03M	MS21074L03
NAS698CD04L	MS21074-04
NAS698CD04LK	MS21074-04K
NAS698CD04LM	MS21074L04
NAS698CD04LMK	MS21074L04K
NAS698CD06L	MS21074L06
NAS698CD06LK	MS21074-06K
NAS698CD06LM	MS21074-06
NAS698CD06LMK	MS21074L06K
NAS698CD08	MS21074-08
NAS698CD08K	MS21074-08K
NAS698CD08M	MS21074L08
NAS698CD08MK	MS21074L08K
NAS696C3	MS21074-3
NAS698C3K	MS21074-3K
NAS698C3M	MS21074L3
NAS698C3MK	MS21074L3K
NAS698C4	MS21074-3
NAS698C4K	MS21074-3K
NAS698C4M	MS21074L4
NAS698C4MK	MS21074L4K
NAS696C5	MS21074-5
NAS698C5K	MS21074-5K
NAS698C5M	MS21074L5
NAS698C5MK	MS21074L5K
NAS696C6	MS21074-6
NAS698C6K	MS21074-6K
NAS698C6M	MS21074L6
NAS698C6MK	MS21074L6K

USER ACTIVITIES
ARMY-CR, MI
NAVY-OS

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

APPROVED 6 APR 64
REVISED (F) FOR CHANGES SEE PAGES 1,2 AND 3

PA NAVY-AS Other Cust ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, CORNER, REDUCED RIVET SPACING, LOW HEIGHT, CRES, 125KSI Ftu, 450°F & 800°F	MILITARY STANDARD MS21074
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 698		PAGE 3 OF 3