
FED. SUP CLASS
5305

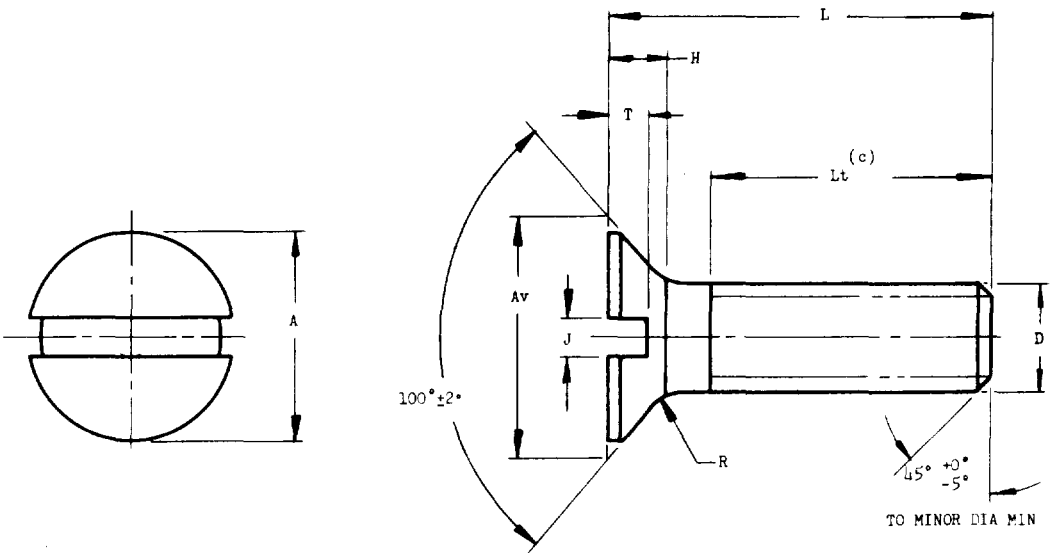

SIZE DESIGNATION	THDS PER INCH	D MAX MAJOR DIA	HEAD DIMENSIONS									
			A HEAD DIA		Av (a) DIA OF FULL CONE AT MAX H	H HEAD HGT		J SLOT WIDTH		T SLOT DEPTH		R(b) MAX RAD
			MAX	MIN		MAX	MIN	MAX	MIN	MAX	MIN	
.30 UNM	318	.0118	.023	.021	.0285	.007	.005	.004	.003	.004	.002	.005
.40 UNM	254	.0157	.029	.027	.0348	.008	.006	.005	.003	.005	.003	.006
.50 UNM	203	.0197	.037	.035	.0459	.011	.008	.006	.004	.006	.004	.008
.60 UNM	169	.0236	.045	.043	.0546	.013	.010	.008	.005	.008	.005	.010
.80 UNM	127	.0315	.056	.054	.0696	.016	.012	.010	.007	.010	.006	.012
1.00 UNM	102	.0394	.072	.068	.0847	.019	.015	.012	.008	.012	.008	.016
1.20 UNM	102	.0472	.092	.088	.1068	.025	.020	.016	.012	.016	.010	.020

(a) "Av" DERIVED FROM MAX D, MAX H AND MEAN ANGLE.
(b) RELATIVE TO MAX MAJOR DIA.
(c) FOR SCREW LENGTHS FOUR TIMES THE MAXIMUM MAJOR DIAMETER OR LESS, THREAD LENGTH (Lt) SHALL EXTEND TO WITHIN TWO THREADS OF THE HEAD BEARING SURFACE. SCREWS OF GREATER LENGTH SHALL HAVE COMPLETE THREADS FOR A MINIMUM OF FOUR MAXIMUM MAJOR DIAMETERS.

MATERIAL: CORROSION-RESISTANT STEELS: QQ-S-763,
CLASS 303, COND A.
CLASS 416, COND A, HEAT TREAT TO 125,000-145,000 PSI.
CLASS 420, COND A, HEAT TREAT TO 220,000-240,000 PSI.
BRASS: QQ-B-626, COMP 22, TEMPER HALF HARD.
(A) NICKEL SILVER: QQ-C-586, COMP 4, TEMPER HARD.
FINISH: CORROSION-RESISTANT STEEL: PASSIVATE. SEE PROCUREMENT SPECIFICATION.
(A) BRASS: UNCOATED; BLACK OXIDE, MIL-F-495.
(A) NICKEL SILVER: UNCOATED.
SURFACE ROUGHNESS: SURFACE ROUGHNESS OF HEADS SHALL BE AA63 MAXIMUM IN ACCORDANCE WITH MIL-STD-10.

SCREWS SHALL BE FREE OF ALL PROJECTING BURRS, OBSERVED AT 3X MAGNIFICATION.

DIMENSIONS IN INCHES.

THE DIAMETER OF THE UNTHREADED BODY SHALL NOT BE MORE THAN THE MAXIMUM MAJOR DIAMETER NOR LESS THAN THE MINIMUM PITCH DIAMETER OF THE THREAD.

EXAMPLE OF PART NUMBERS: MS21270A1 = .30 UNM CLASS 303 PASSIVATED CORROSION-RESISTANT STEEL SCREW, .025 MAX LENGTH.
MS21270B1 = .30 UNM CLASS 416 PASSIVATED CORROSION-RESISTANT STEEL SCREW, .025 MAX LENGTH.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID. (A) FOR CHANGES SEE SHEETS 1 & 2.

User Activities:
Army - MI, MU
Navy - Weps

Reviewer Activities:
Army - MO, EL, WC
Navy - Ships
USAF - ASD, MOA

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 28 Sep 61 REVISED (A) 31 Oct 63

P.A. USAF- ASD Other Cust Navy - Ships Army - WC	TITLE SCREW, INSTRUMENT - 100 DEGREE FLAT HEAD	MILITARY STANDARD MS21270
PROCUREMENT SPECIFICATION FF-S- 89	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.

CORROSION RESISTANT STEEL CLASS 303	CORROSION RESISTANT STEEL CLASS 416	CORROSION RESISTANT STEEL CLASS 420	BRASS	BRASS BLACK OXIDE	NICKEL SILVER	L LENGTH	
DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	MAX	MIN
		.30 UNM					
A1	B1	C1	D1	E1	F1	.025	.020
A2	B2	C2	D2	E2	F2	.032	.027
A3	B3	C3	D3	E3	F3	.040	.035
A4	B4	C4	D4	E4	F4	.050	.044
A5	B5	C5	D5	E5	F5	.060	.054
A6	B6	C6	D6	E6	F6	.080	.072
A7	B7	C7	D7	E7	F7	.100	.092
A8	B8	C8	D8	E8	F8	.120	.110
A9	B9	C9	D9	E9	F9	.160	.150
		.40 UNM					
A19	B19	C19	D19	E19	F19	.032	.027
A20	B20	C20	D20	E20	F20	.040	.035
A21	B21	C21	D21	E21	F21	.050	.044
A22	B22	C22	D22	E22	F22	.060	.054
A23	B23	C23	D23	E23	F23	.080	.072
A24	B24	C24	D24	E24	F24	.100	.092
A25	B25	C25	D25	E25	F25	.120	.110
A26	B26	C26	D26	E26	F26	.160	.150
A27	B27	C27	D27	E27	F27	.200	.188
		.50 UNM					
A37	B37	C37	D37	E37	F37	.040	.035
A38	B38	C38	D38	E38	F38	.050	.044
A39	B39	C39	D39	E39	F39	.060	.054
A40	B40	C40	D40	E40	F40	.080	.072
A41	B41	C41	D41	E41	F41	.100	.092
A42	B42	C42	D42	E42	F42	.120	.110
A43	B43	C43	D43	E43	F43	.160	.150
A44	B44	C44	D44	E44	F44	.200	.188
A45	B45	C45	D45	E45	F45	.250	.238
		.60 UNM					
A55	B55	C55	D55	E55	F55	.050	.044
A56	B56	C56	D56	E56	F56	.060	.054
A57	B57	C57	D57	E57	F57	.080	.072
A58	B58	C58	D58	E58	F58	.100	.092
A59	B59	C59	D59	E59	F59	.120	.110
A60	B60	C60	D60	E60	F60	.160	.150
A61	B61	C61	D61	E61	F61	.200	.188
A62	B62	C62	D62	E62	F62	.250	.238
A63	B63	C63	D63	E63	F63	.320	.304
		.80 UNM					
A73	B73	C73	D73	E73	F73	.060	.054
A74	B74	C74	D74	E74	F74	.080	.072
A75	B75	C75	D75	E75	F75	.100	.092
A76	B76	C76	D76	E76	F76	.120	.110
A77	B77	C77	D77	E77	F77	.160	.150
A78	B78	C78	D78	E78	F78	.200	.188
A79	B79	C79	D79	E79	F79	.250	.238
A80	B80	C80	D80	E80	F80	.320	.304
A81	B81	C81	D81	E81	F81	.400	.384
		1.00 UNM					
A91	B91	C91	D91	E91	F91	.080	.072
A92	B92	C92	D92	E92	F92	.100	.092
A93	B93	C93	D93	E93	F93	.120	.110
A94	B94	C94	D94	E94	F94	.160	.150
A95	B95	C95	D95	E95	F95	.200	.188
A96	B96	C96	D96	E96	F96	.250	.238
A97	B97	C97	D97	E97	F97	.320	.304
A98	B98	C98	D98	E98	F98	.400	.384
A99	B99	C99	D99	E99	F99	.500	.480
		1.20 UNM					
A109	B109	C109	D109	E109	F109	.100	.092
A110	B110	C110	D110	E110	F110	.120	.110
A111	B111	C111	D111	E111	F111	.160	.150
A112	B112	C112	D112	E112	F112	.200	.188
A113	B113	C113	D113	E113	F113	.250	.238
A114	B114	C114	D114	E114	F114	.320	.304
A115	B115	C115	D115	E115	F115	.400	.384
A116	B116	C116	D116	E116	F116	.500	.480
A117	B117	C117	D117	E117	F117	.600	.580

FED. SUP CLASS
5305

APPROVED 28 Sep 61 REVISED (A) FOR CHANGES SEE SHEETS 1 & 2.

User Activities:
Army - MI, MU
Navy - Weps

Reviewer Activities:
Army - MO, EL, WC
Navy - Ships
USAF - ASD, MOA

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - ASD
Other Cust
Navy - Ships
Army - WC

PROCUREMENT SPECIFICATION
FF-S-89

TITLE
SCREW, INSTRUMENT - 100 DEGREE FLAT HEAD

SUPERSEDES:

MILITARY STANDARD
MS21270
SHEET 2 OF

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.