FED. SUP CLASS
4220

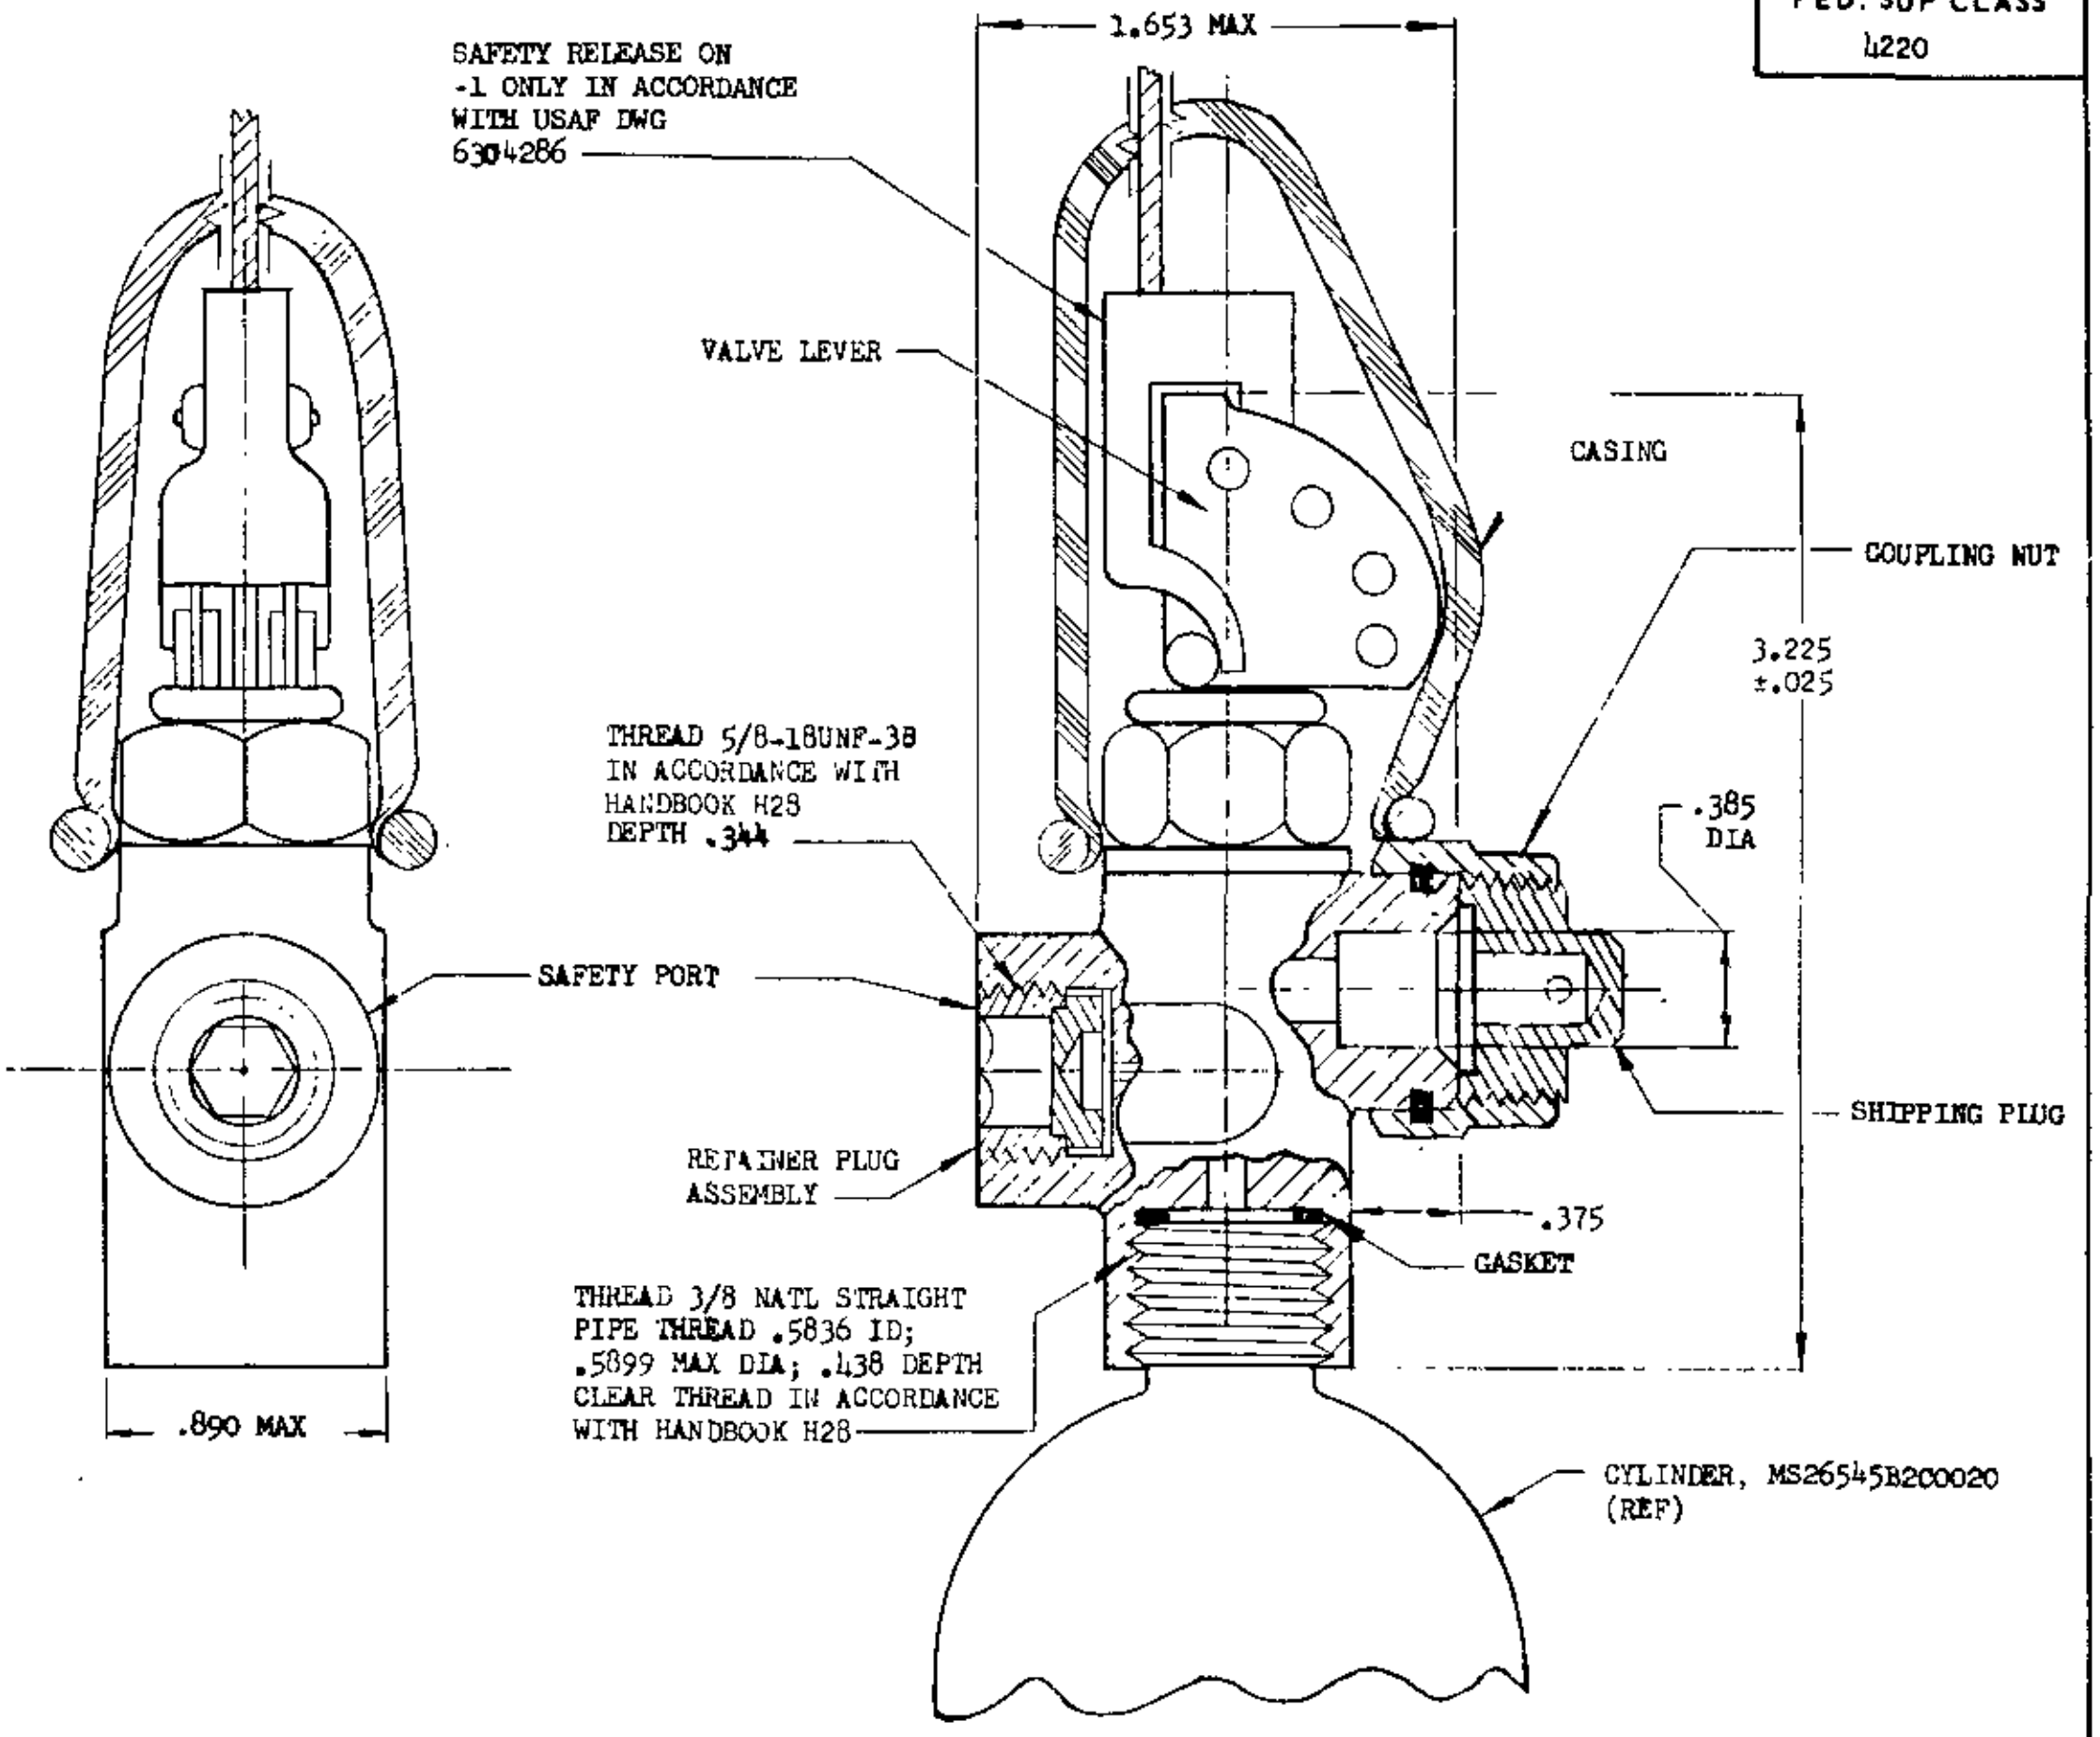
1.653 MAX
SAFETY RELEASE ON -1 ONLY IN ACCORDANCE WITH USAF DWG 63C4286
VALVE LEVER
CASING
COUPLING NUT
3.225 ±.025
THREAD 5/8-18UNF-3B IN ACCORDANCE WITH HANDBOOK H28 DEPTH .344
.385 DIA
SAFETY PORT
SHIPPING PLUG
RETAINER PLUG ASSEMBLY
.375
GASKET
THREAD 3/8 NATL STRAIGHT PIPE THREAD .5836 ID; .5899 MAX DIA; .438 DEPTH CLEAR THREAD IN ACCORDANCE WITH HANDBOOK H28
.890 MAX
CYLINDER, MS26545B2C0020 (REF)

VALVE ASSEMBLY

DASH NO.	TYPE	PART
-1	VALVE ASSEMBLY WITH SAFETY RELEASE AF DWG 63C4286	- - - - - - - -
-2	VALVE ASSEMBLY WITHOUT SAFETY RELEASE AF DWG 63C4286	- - - - - - - -
-3	- -	COUPLING NUT
-4	- -	SAFETY PORT PLUG
-5	- -	SAFETY PORT INSERT
-6	- -	SAFETY PORT DISC
-7	- -	SAFETY PORT WASHER
-8	- -	CASING
-9	- -	SHIPPING PLUG
-10	- -	GASKET

Ⓐ CANCELED 29 January 1971 . NO SUPERSEDING STANDARD.

LINEAR DIMENSIONS IN INCHES. ANGULAR DIMENSIONS IN DEGREES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Review activities:
USAF - 11, 84
Navy - WP

This standard has been approved by the Department of the Air Force (11) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 31 Mar 65
REVISED Ⓐ 29 Jan 71

P.A. USAF - 11 Other Cust Navy - WP USAF - 11	TITLE VALVE, INFLATION, VENTED, ONE MAN LIFE RAFT	**MILITARY STANDARD** **MS22071(ASG)**
PROCUREMENT SPECIFICATION MIL-V-25492	SUPERSEDES:	SHEET 1 OF 4

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED. SUP CLASS
4220

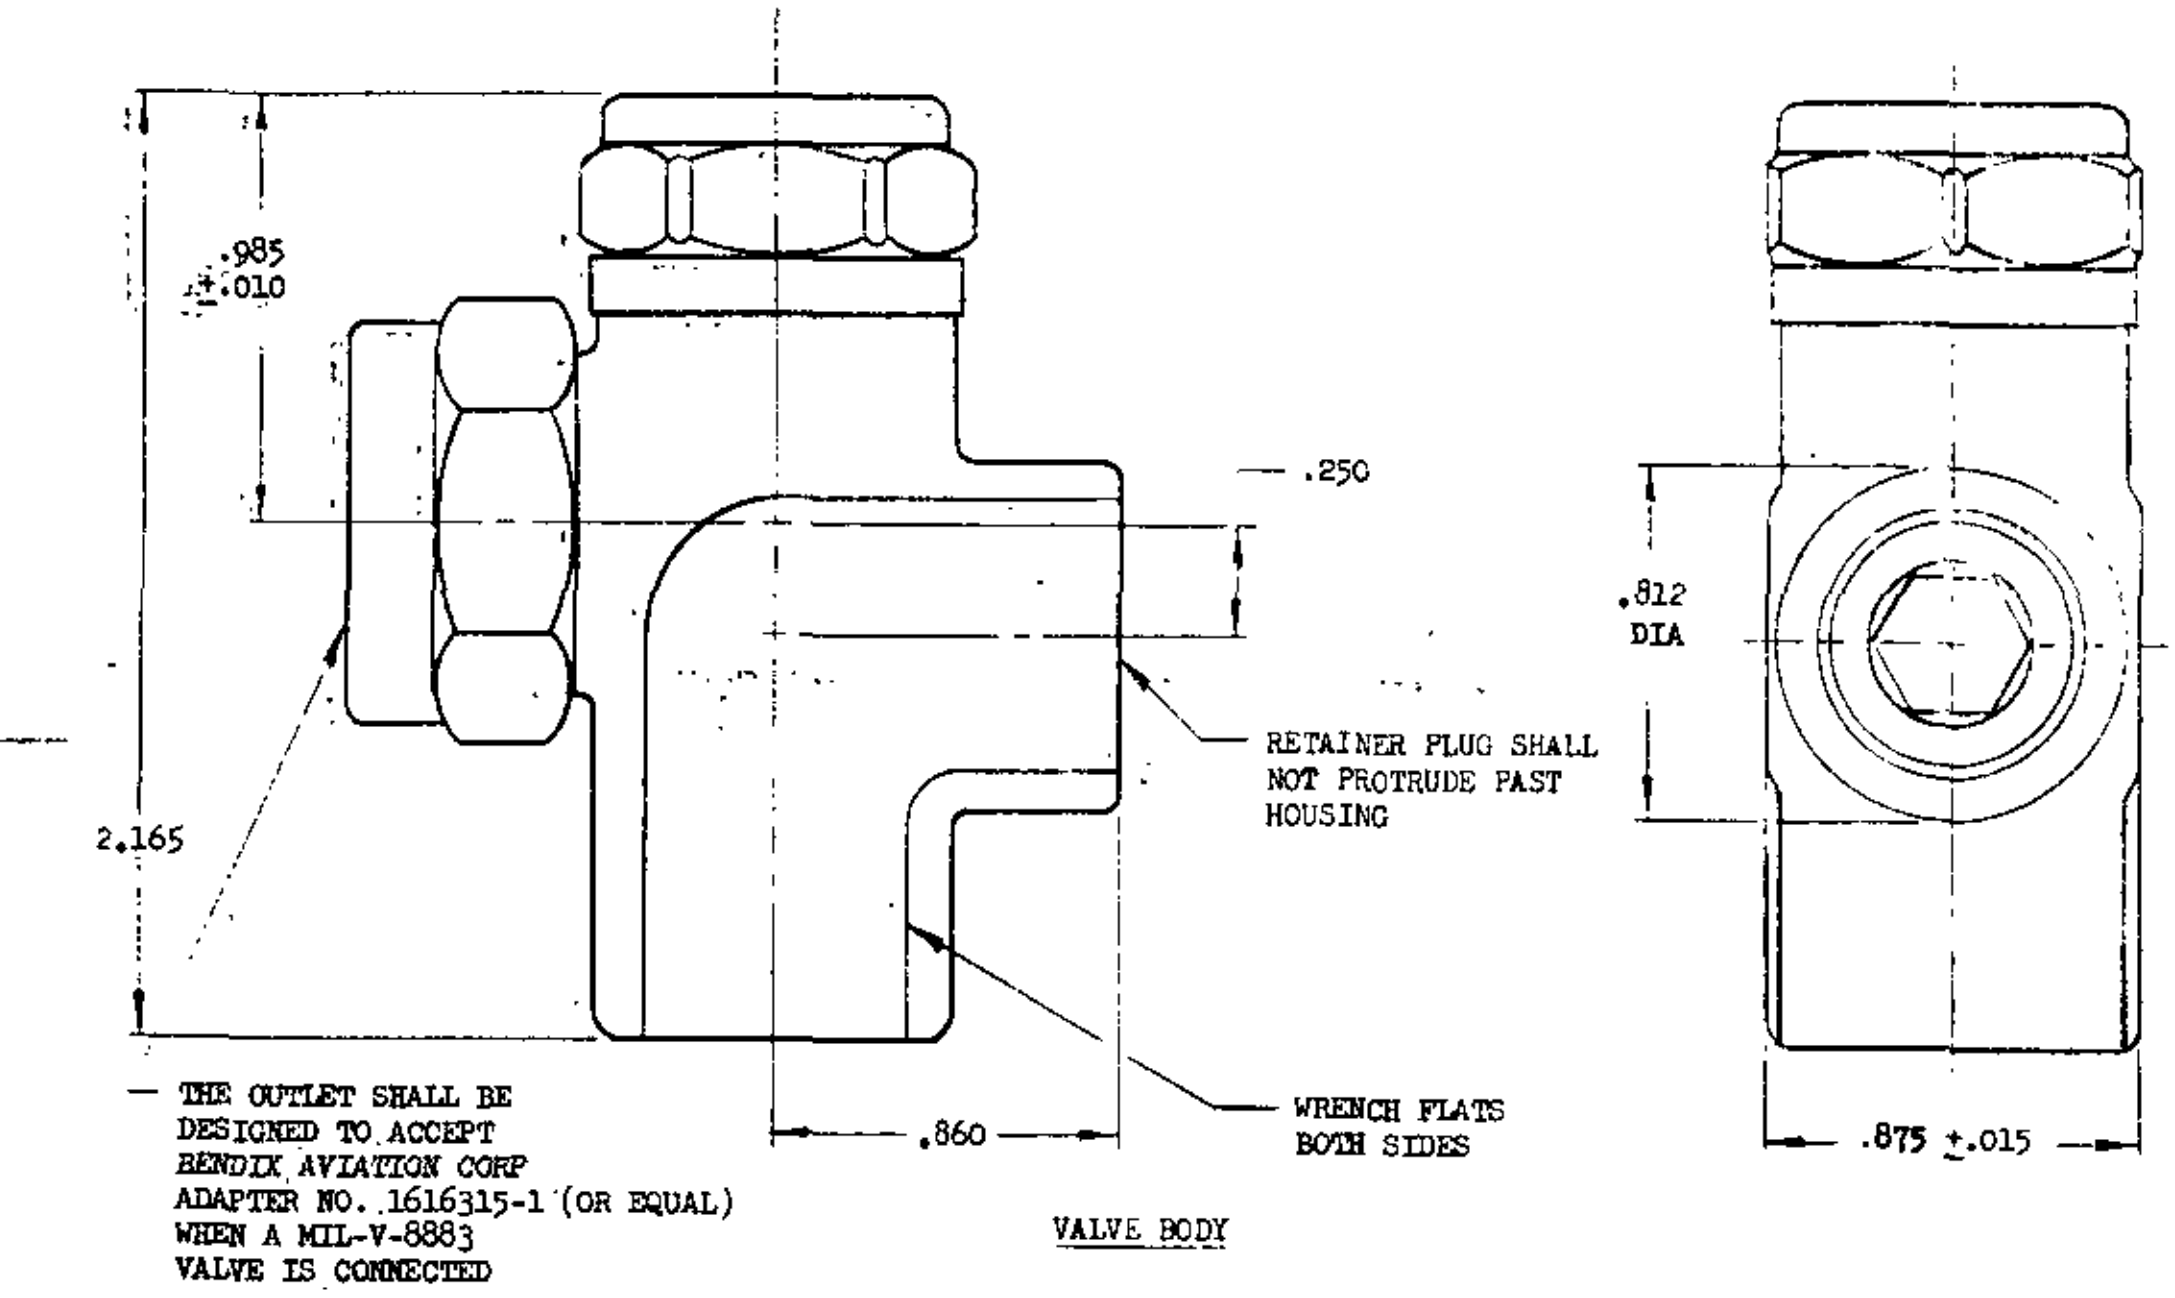
.985
±.010
2.165
.250
.812
DIA
RETAINER PLUG SHALL NOT PROTRUDE PAST HOUSING
.860
WRENCH FLATS BOTH SIDES
.875 ±.015
THE OUTLET SHALL BE DESIGNED TO ACCEPT *BENDIX AVIATION CORP* ADAPTER NO. 1616315-1 (OR EQUAL) WHEN A MIL-V-8883 VALVE IS CONNECTED

VALVE BODY

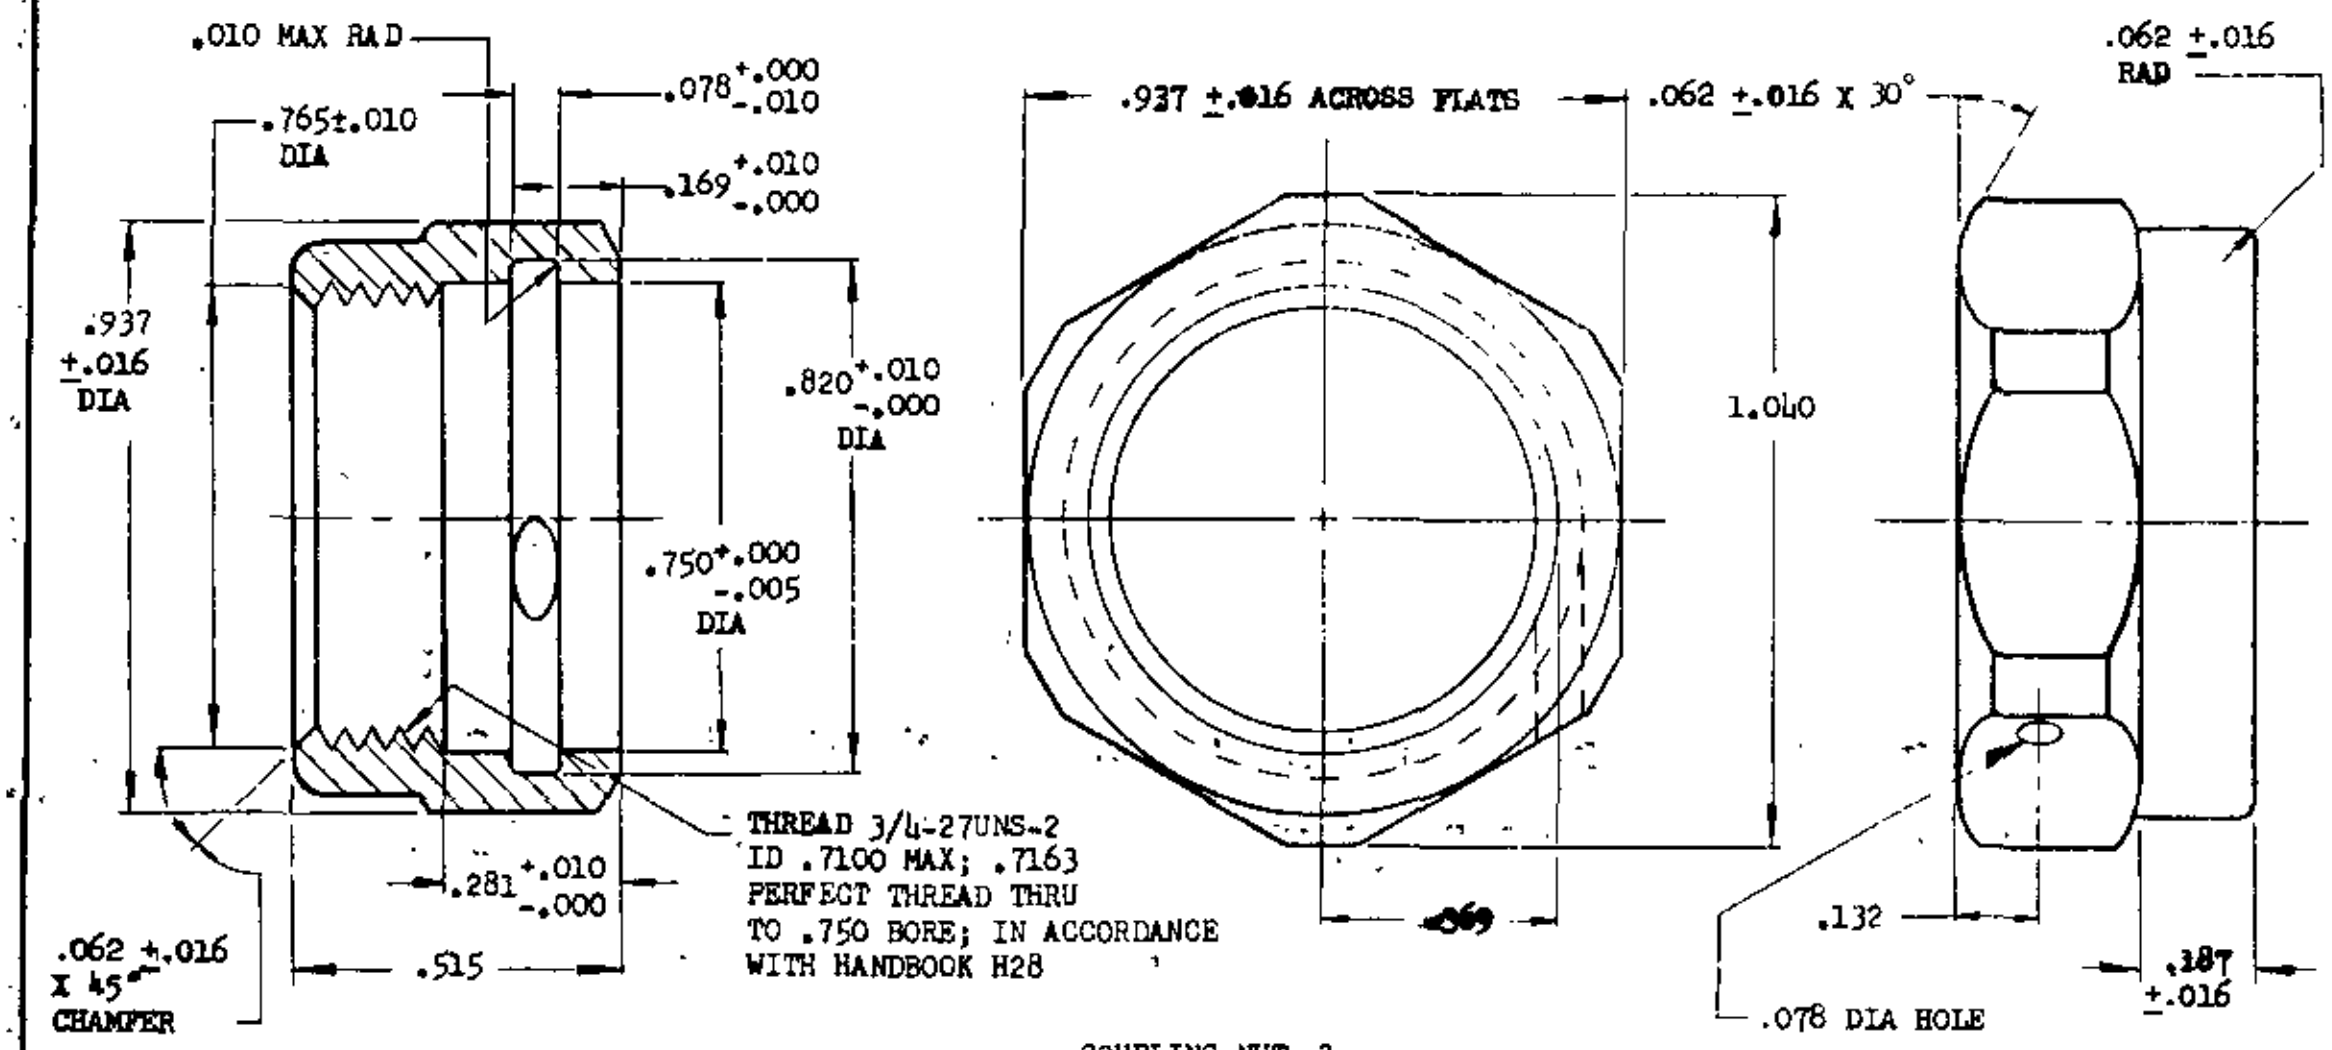
.010 MAX RAD
.765±.010
DIA
.078 +.000 -.010
.169 +.010 -.000
.937
±.016
DIA
.820 +.010 -.000
DIA
.750 +.000 -.005
DIA
.281 +.010 -.000
.515
.062 ±.016
X 45°
CHAMFER
THREAD 3/4-27UNS-2 ID .7100 MAX; .7163 PERFECT THREAD THRU TO .750 BORE; IN ACCORDANCE WITH HANDBOOK H28
.937 ±.016 ACROSS FLATS
.062 ±.016 X 30°
1.040
.069
.062 ±.016
RAD
.132
.078 DIA HOLE
.187
±.016

COUPLING NUT -3

REVISED (A) CANCELED SEE SHT 1

APPROVED 31 Mar 65

This standard has been approved by the Departments of the Air Force (11) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - WP USAF - 11	TITLE VALVE, INFLATION, VENTED, ONE MAN LIFE RAFT	MILITARY STANDARD MS22071(ASG)
PROCUREMENT SPECIFICATION MIL-V-25492	SUPERSEDES:	SHEET 2 OF

DD FORM 672-1 1 SEP 57 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
4220

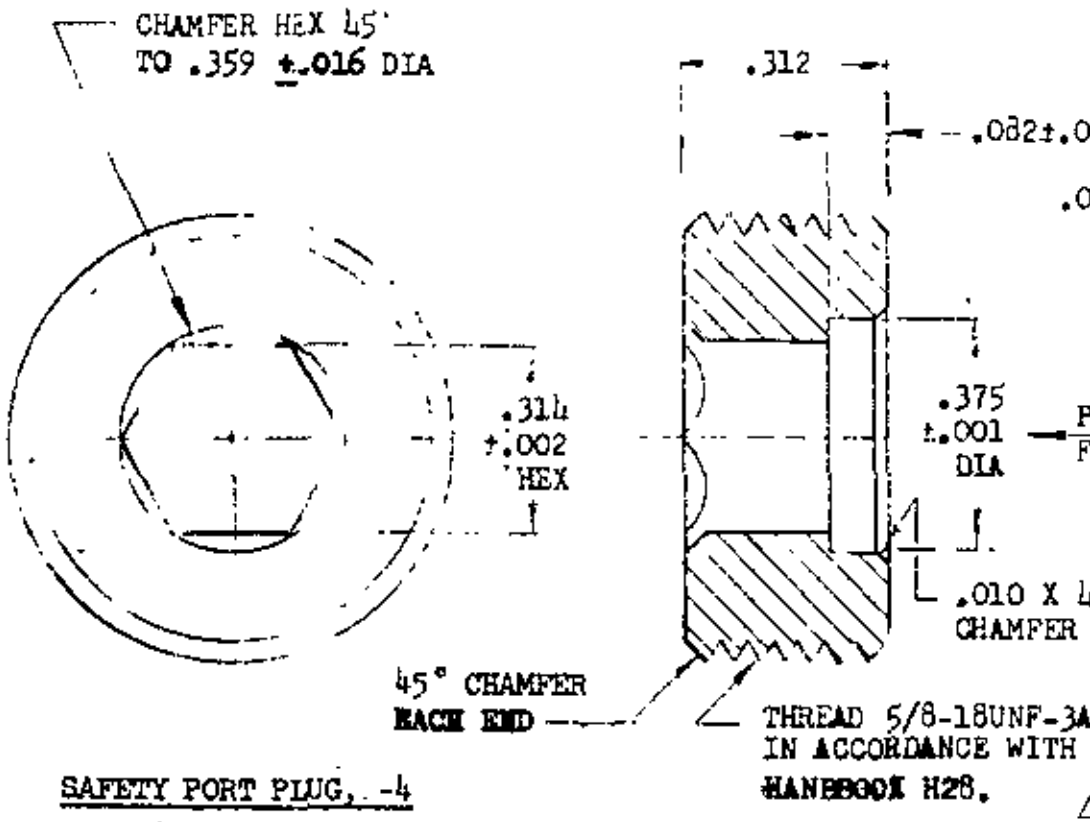
CHAMFER HEX 45°
TO .359 ±.016 DIA
.314
±.002
HEX
.312
.082±.005
.375
±.001
DIA
PRESS
FIT
.010 X 45°
CHAMFER
45° CHAMFER
EACH END
THREAD 5/8-18UNF-3A
IN ACCORDANCE WITH
HANDBOOK H28.

SAFETY PORT PLUG, -4

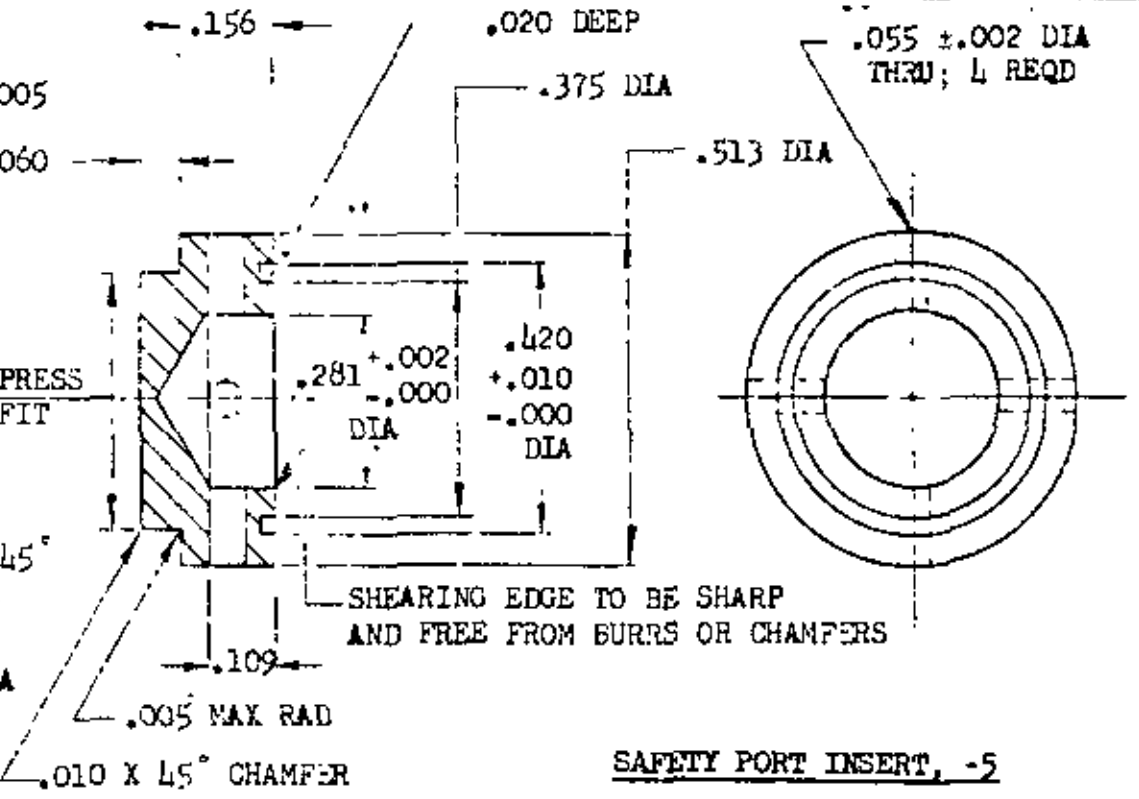
.156
.020 DEEP
.060
.375 DIA
.055 ±.002 DIA
THRU; 4 REQD
.513 DIA
.281 +.002 -.000 DIA
.420 +.010 -.000 DIA
SHEARING EDGE TO BE SHARP
AND FREE FROM BURRS OR CHAMFERS
.109
.005 MAX RAD
.010 X 45° CHAMFER

SAFETY PORT INSERT, -5

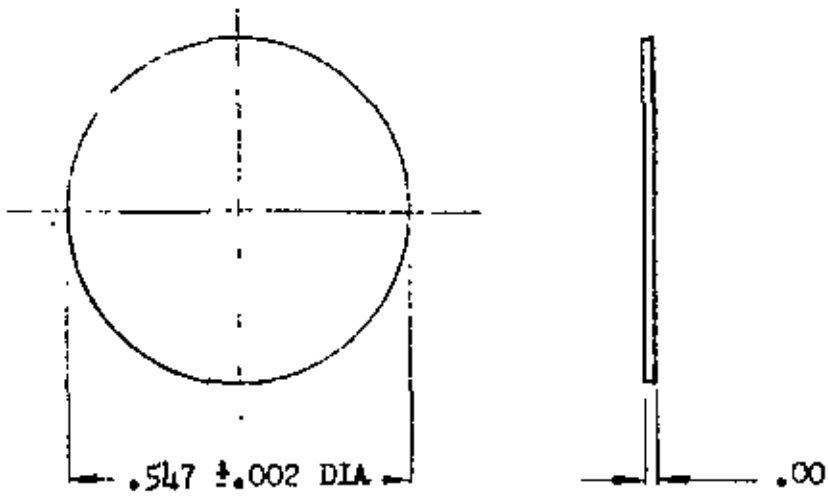
.547 ±.002 DIA
.007

SAFETY PORT DISC, -6

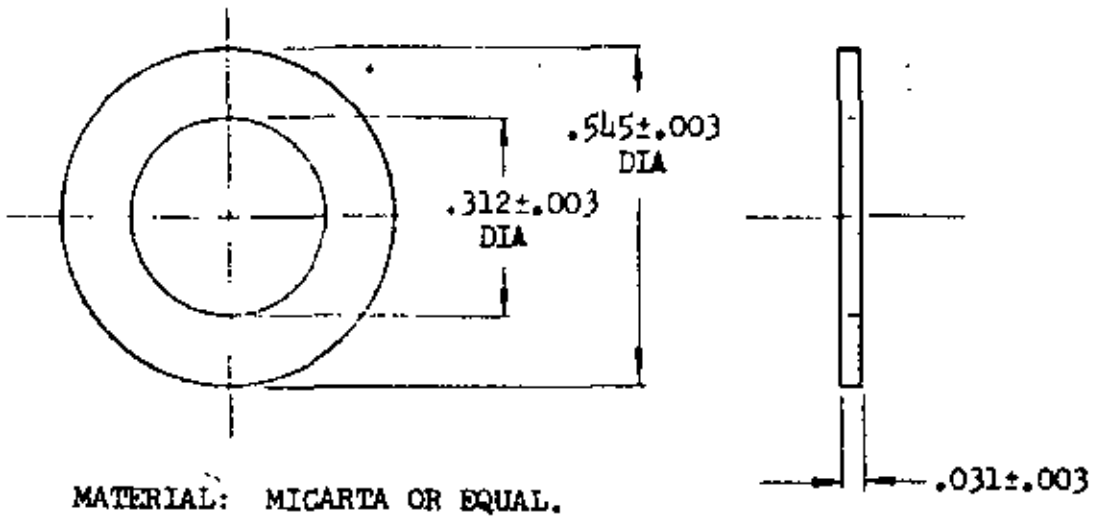
.545±.003
DIA
.312±.003
DIA
.031±.003

MATERIAL: MICARTA OR EQUAL.

SAFETY PORT WASHER, -7

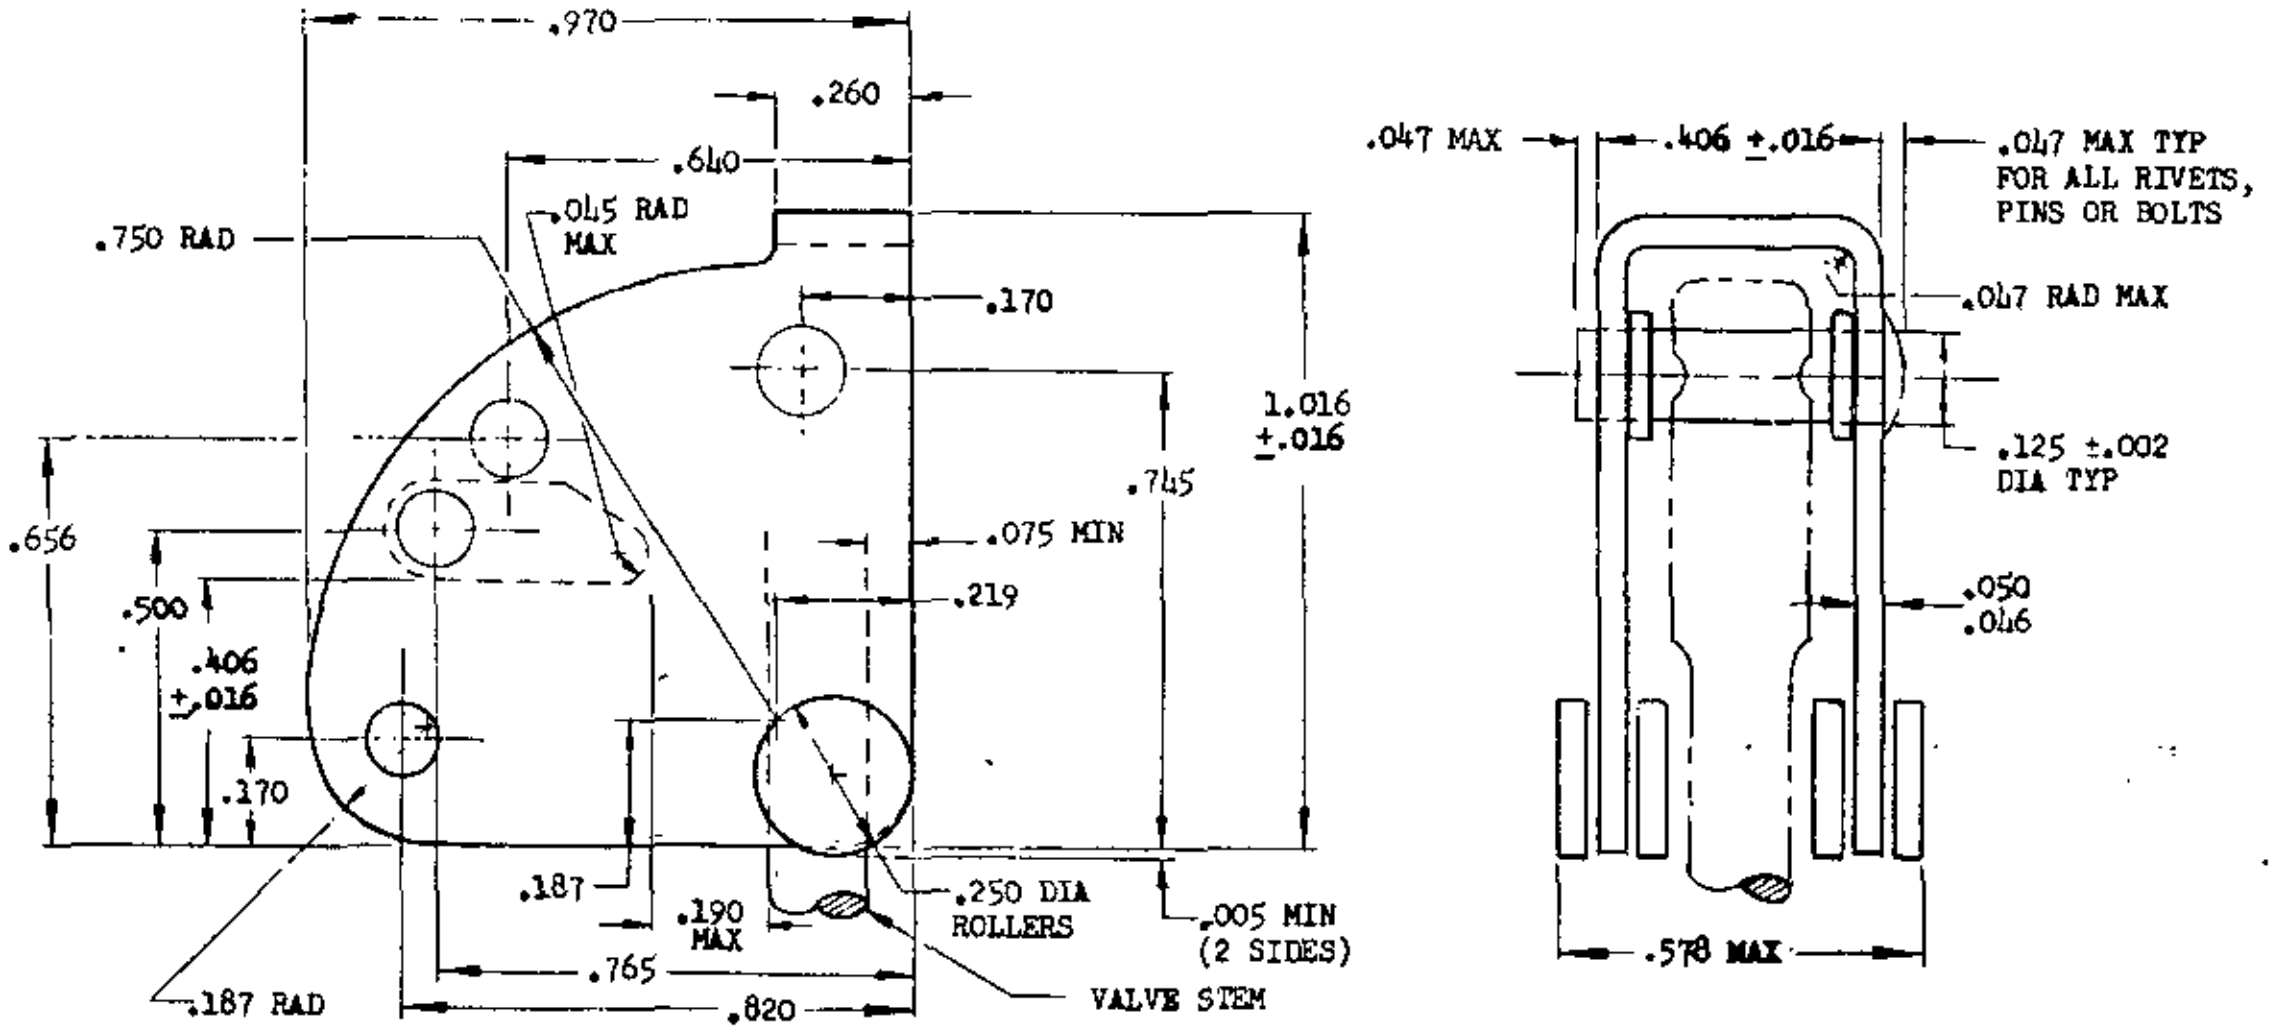
.970
.260
.640
.750 RAD
.045 RAD
MAX
.170
1.016
±.016
.745
.656
.075 MIN
.500
.219
.406
±.016
.170
.187
.190
MAX
.250 DIA
ROLLERS
.005 MIN
(2 SIDES)
.765
.820
.187 RAD
VALVE STEM
.047 MAX
.406 ±.016
.047 MAX TYP
FOR ALL RIVETS,
PINS OR BOLTS
.047 RAD MAX
.125 ±.002
DIA TYP
.050
.046
.578 MAX

VALVE LEVER

APPROVED 31 Mar 65 REVISED Ⓐ CANCELED SEE SHT 1

This [illegible] has been approved by the Department of the Air Force (11) and the [illegible] and is mandatory for use by [illegible] of the Navy [illegible] other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - WP USAF - 11	TITLE VALVE, INFLATION, VENTED, ONE MAN LIFE RAFT	MILITARY STANDARD MS22071(ASG)
PROCUREMENT SPECIFICATION MIL-V-25492	SUPERSEDES:	SHEET 3 OF

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
4220

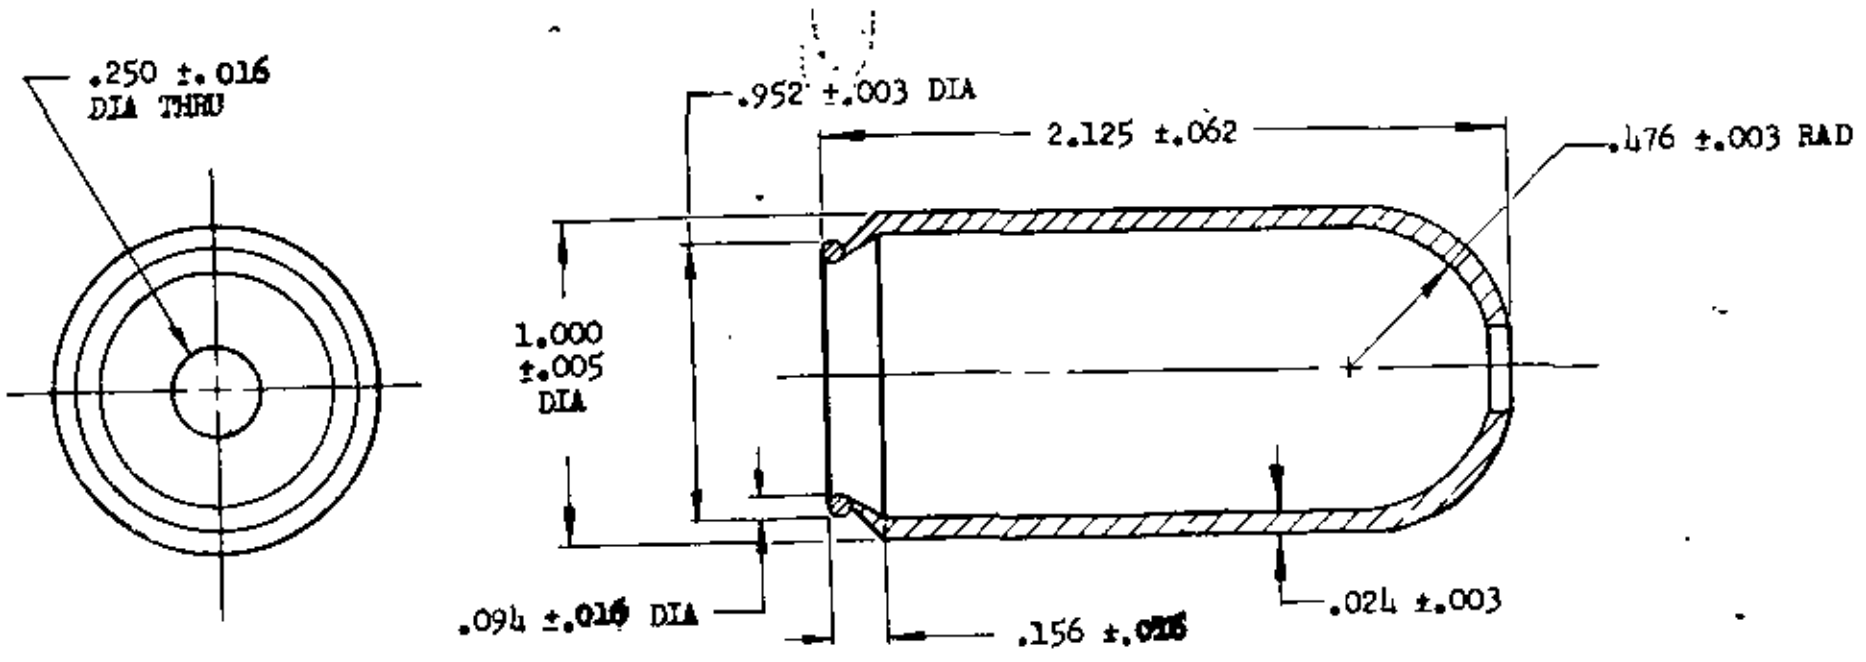
.250 ±.016 DIA THRU
.952 ±.003 DIA
2.125 ±.062
.476 ±.003 RAD
1.000 ±.005 DIA
.094 ±.016 DIA
.156 ±.016
.024 ±.003

MATERIAL: NEOPRENE, SHORE DUROMETER OF 50 ±10. MINIMUM ELONGATION 500 PERCENT.

CASING, -8

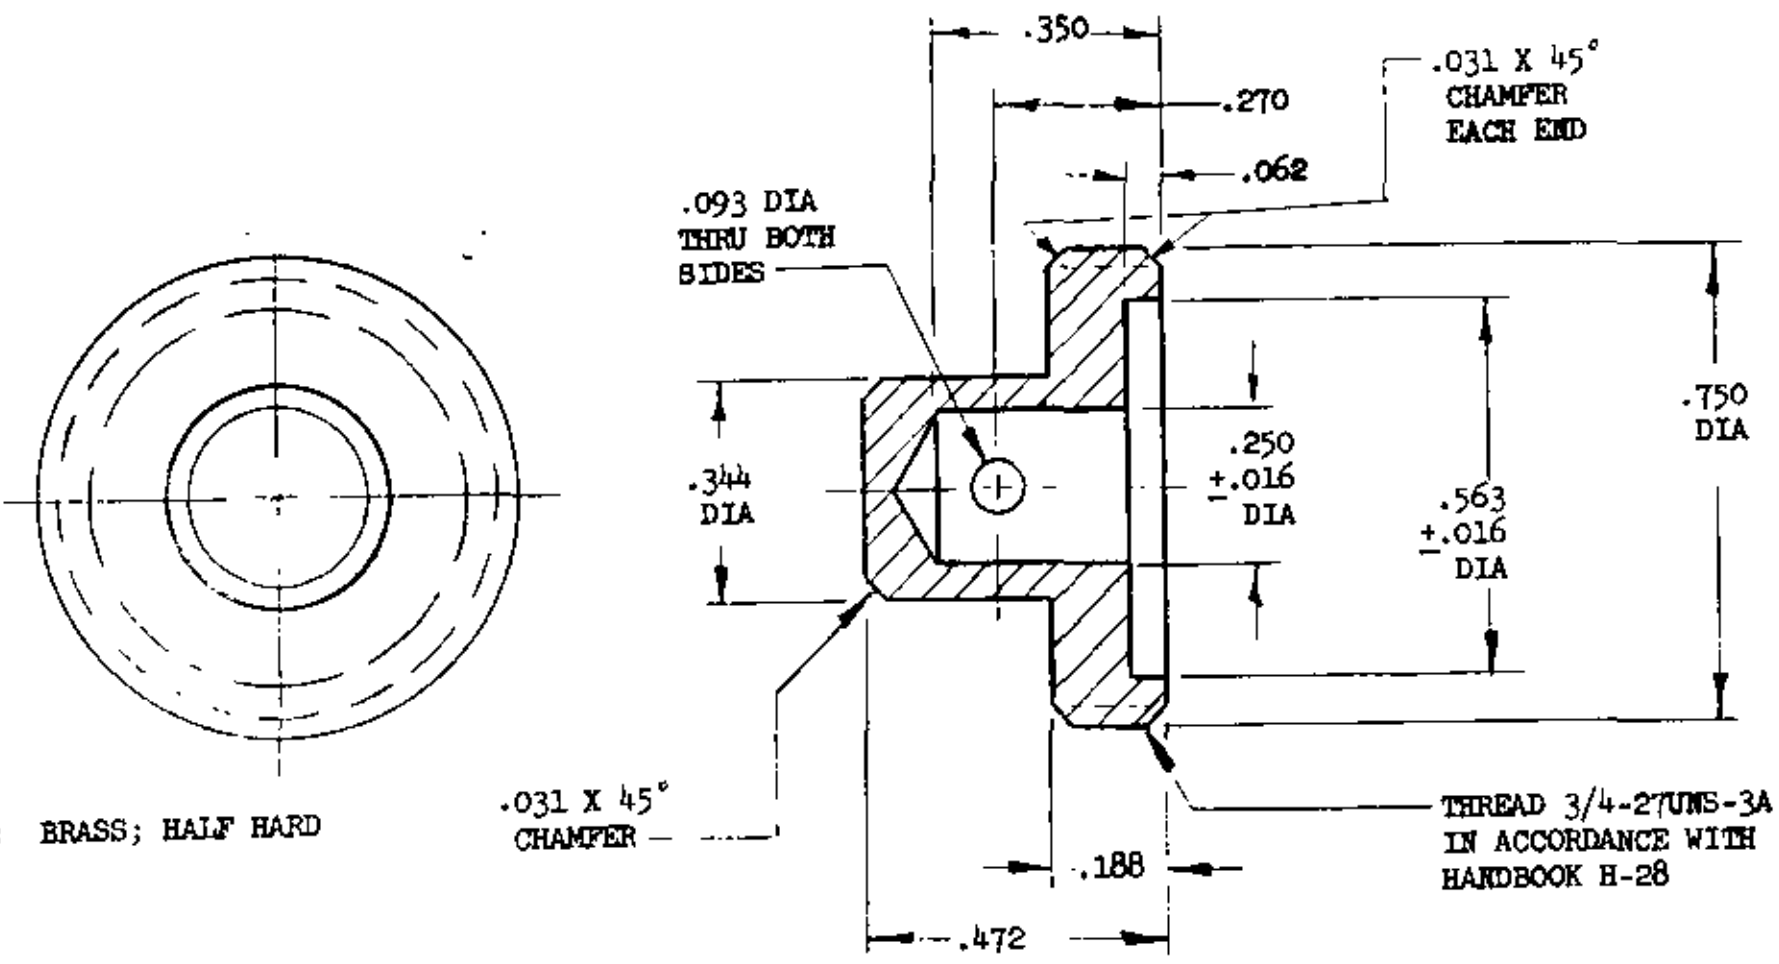
.350
.270
.062
.031 X 45° CHAMFER EACH END
.093 DIA THRU BOTH SIDES
.344 DIA
.250 ±.016 DIA
.563 ±.016 DIA
.750 DIA
.031 X 45° CHAMFER
THREAD 3/4-27UNS-3A IN ACCORDANCE WITH HANDBOOK H-28
.188
.472

MATERIAL: BRASS; HALF HARD

SHIPPING PLUG, -9

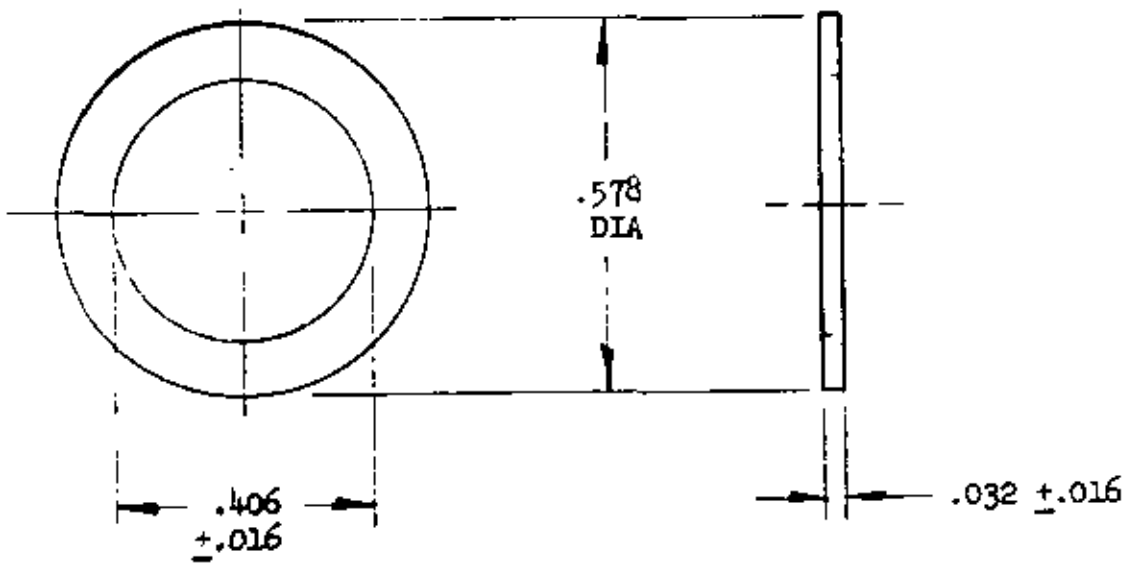
.578 DIA
.406 ±.016
.032 ±.016

MATERIAL: .032 X 3/4 DIA SOFT COPPER ANNEALED. SHALL BE FREE FROM PITTING, SCRATCHES AND OTHER SURFACE DEFECTS.

GASKET, -10

APPROVED 31 Mar 65 REVISED (A) CANCELED SEE SHT 1

This standard has been approved by the Department of the Air Force . 1) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - WP USAF - 11	TITLE VALVE, INFLATION, VENTED, ONE MAN LIFE RAFT	MILITARY STANDARD MS22071(ASG)
PROCUREMENT SPECIFICATION MIL-V-25492	SUPERSEDES:	SHEET 4 OF

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-433-695/4226