



FED. SUP CLASS
4730

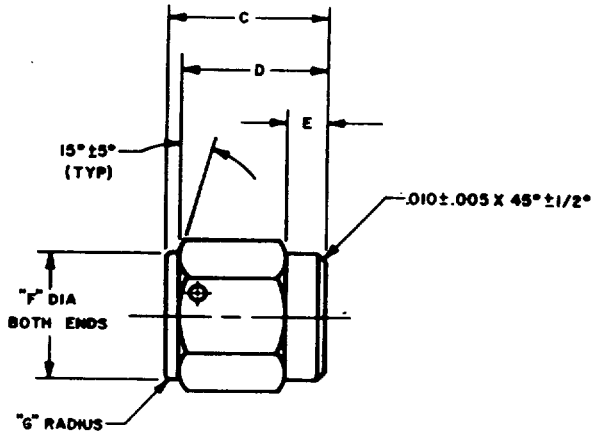

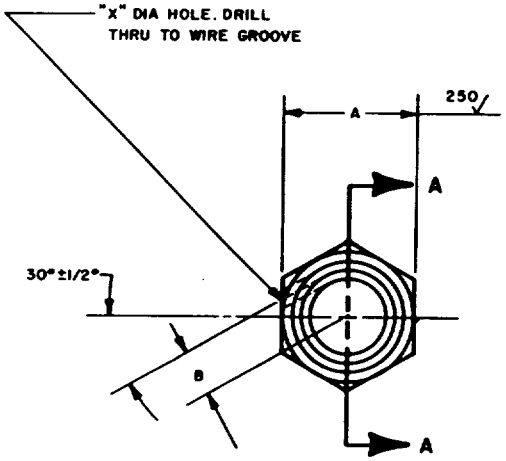


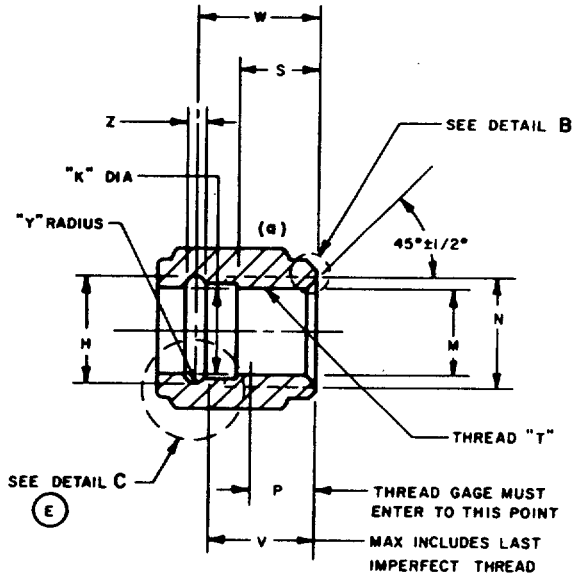

SECTION A-A



DETAIL B
OPTIONAL CHAMFER
CRES ONLY

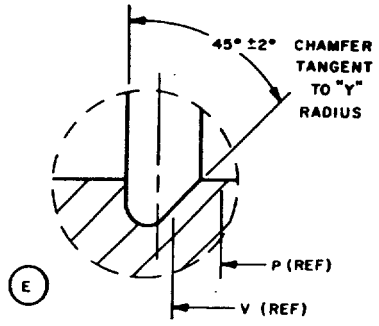

DETAIL C
SIZES -4 THRU -12 ONLY

APPROVED 1 SEPT 61 — REVISED (A) 2 JUL 63 (B) 2 MAY 66 (C) 6 MAR 69 (D) 30 JUN 72 (E) 12 AUG 77

FOR CHANGES SEE SHEET 1, 2 AND 3.

(E)

P.A. AIR FORCE-99 Other Cust ARMY-AV NAVY-AS	TITLE NUT, TUBE COUPLING- SWIVEL	MILITARY STANDARD MS27073
PROCUREMENT SPECIFICATION MIL-A-5070	SUPERSEDES: MS27233	SHEET 1 OF 3

DD FORM 672-1 (Coordinated)

User activities:
ARMY-WC, ME, MI

Review activities:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:

User activities:
ARMY - WC, ME, MI

P.A. AIR FORCE - 99
Other Cust ARMY - AV (E) NAVY - AS

PROCUREMENT SPECIFICATION MIL-A-5070

SUPERSEDES: MS27233

TITLE
NUT, TUBE COUPLING - SWIVEL

MILITARY STANDARD

MS27073

SHEET 2 OF 3

DD FORM 672-1 (Coordinated)

(E)

DASH NUMBER * STEEL	DASH NUMBER CRES STEEL	DASH NUMBER ALUM	A		B ±.005	C ±.010	D ±.010	E ±.015	"F" ±.005	"G" ±.015	H ±.005	K ±.005	M		N ±.015
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
-4	-4 C	—	.559	+.007 -.000	.194	.640	.551	.125	.557	.031	.461	.415	.393	± .004	.437
-5	-5 C	—	.621		.224	.687	.609		.620		.531	.477	.455		.500
-6	-6 C	—	.684		.252	.718	.656	.156	.682	.047	.588	.534	.512	+ .005 − .004	.562
—	-8 C	-8D	.871		.341	.843	.754		.870		.781	.693	.693		.750
—	-10 C	-10D	.996		.396	.968	.858	.172	.995		.896	.810	.810		.875
—	-12 C	-12D	1.246		.485	1.015	.875	.125	1.245	.062	1.102	.986	.986	± .005	1.062
—	-16 C	-16D	1.496		.610	1.125	.983	.219	1.495	.077	1.352	1.236	1.236		1.312
—	-20 C	-20D	1.812	± .018	.766	1.218	1.077	.312	1.807	.046	1.664	1.549	1.549		1.625
—	-24 C	-24D	2.125	± .020	.893	1.406	1.234	.359	2.120	.093	1.917	1.799	1.799		1.875
—	—	-32D	2.750		1.200	1.734	1.515	.438	2.745	.110	2.542	2.424	2.424		2.500

(E)

P MIN	S ±.015	THREAD "T"	V MAX	W		"X" ±.005	"Y" ±.001	Z	
—	—	—	—	—	—	—	—	—	—
.403	.328	.4375 - 20 UNJF - 3B	.500	.500	± .004	.077	.038	—	—
.401	.344	.5000 - 20 UNJF - 3B	.542	.550		.086	.043	—	—
.413		.5625 - 18 UNJF - 3B	.569	.573				—	—
.484	—	.7500 - 16 UNJF - 3B	.647	.660		.101	FULL	.100	±.002
.542	—	.8750 - 14 UNJF - 3B	.727	.762					
.537	—	1.0625 - 12 UNJ - 3B	.753	.780		.131		.128	+.005 -.000
.563	—	1.3125 - 12 UNJ - 3B	.813	.875					
	—	1.6250 - 12 UNJ - 3B		.959	± .005				
.661	—	1.8750 - 12 UNJ - 3B	.911	1.105					
.844	—	2.5000 - 12 UNJ - 3B	1.094	1.340					

MIL-A-5070 ADAPTERS - CARBON STEEL IN -4 THRU -6; ALUMINUM IN -8 THRU -32 SIZES.

FED. SUP CLASS 4730

APPROVED 1 SEPT 61 REVISED FOR CHANGES SEE SHEET 1, 2, AND 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

THREADS PER MIL-S-8879. MS27073 NUTS WITH MODIFIED MIL-S-7742 THREADS TO TO BE USED UNTIL STOCKS ARE EXHAUSTED, BUT ARE NOT TO BE SUPPLIED AFTER 2 MAY 1967.

MATERIAL: (E) ALUMINUM ALLOY, 2024 PER SPECIFICATION QQ-A-225 TEMPER PER MIL-F-5509. CARBON STEEL PER QQ-S-637, C-1137 COLD DRAWN. CORROSION RESISTANT STEEL PER QQ-S-763, CLASS 304, CLASS 316 OR CLASS 347.

FINISH: (E) ALUMINUM ALLOY, ANODIZE PER SPECIFICATION MIL-A-8625, TYPE II. FOR NUT USED ON FLARED END DYE BLUE AND ON FLARELESS, DYE YELLOW. CARBON STEEL, CADMIUM PLATE, DYED BLACK PER SPECIFICATION QQ-P-416, TYPE II, CLASS 2. CORROSION RESISTANT STEEL, SURFACE TREAT PER MIL-S-5002.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: RADIUS OR BREAK ALL CORNERS .005 + .005/-.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSI 846.1-1962 NOT TO EXCEED 125 AA. ALL INSIDE DIAMETERS MUST BE CONCENTRIC WITHIN .005 TIR.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

(a) IF REQUIRED, LOCKWIRE HOLES TO BE DRILLED IN ACCORDANCE WITH AS1043 AND SUFFIX "L" ADDED TO PART NUMBER. EXAMPLE: MS27073-8CL.

NEXT ASSEMBLY: MS27223 & MS27225.

NOTE: THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING LISTED PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U.S. PATENT NOS. 2,833,567 ; 3,044,163 ; 3,055,682) (E)

THIS CHANGE IS REQUIRED FOR NAS 1760 FITTING DESIGN APPLICATIONS. EXISTING PARTS MAY BE USED ON ALL OTHER APPLICATIONS.

APPROVED 1 SEPT 61 REVISED FOR CHANGES SEE SHEETS 1, 2 AND 3

User activities: ARMY - WC, MC, MI

Review activities:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AIR FORCE - 99 (E) Other Cust ARMY - AV NAVY - AS	TITLE NUT, TUBE COUPLING-SWIVEL	MILITARY STANDARD MS 27073
PROCUREMENT SPECIFICATION MIL - A - 5070	SUPERSEDES: MS27233	SHEET 3 OF 3

DD FORM SEP 67 672-1 (Coordinated) Previous editions of this form are obsolete.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.