FED. SUP CLASS
5935

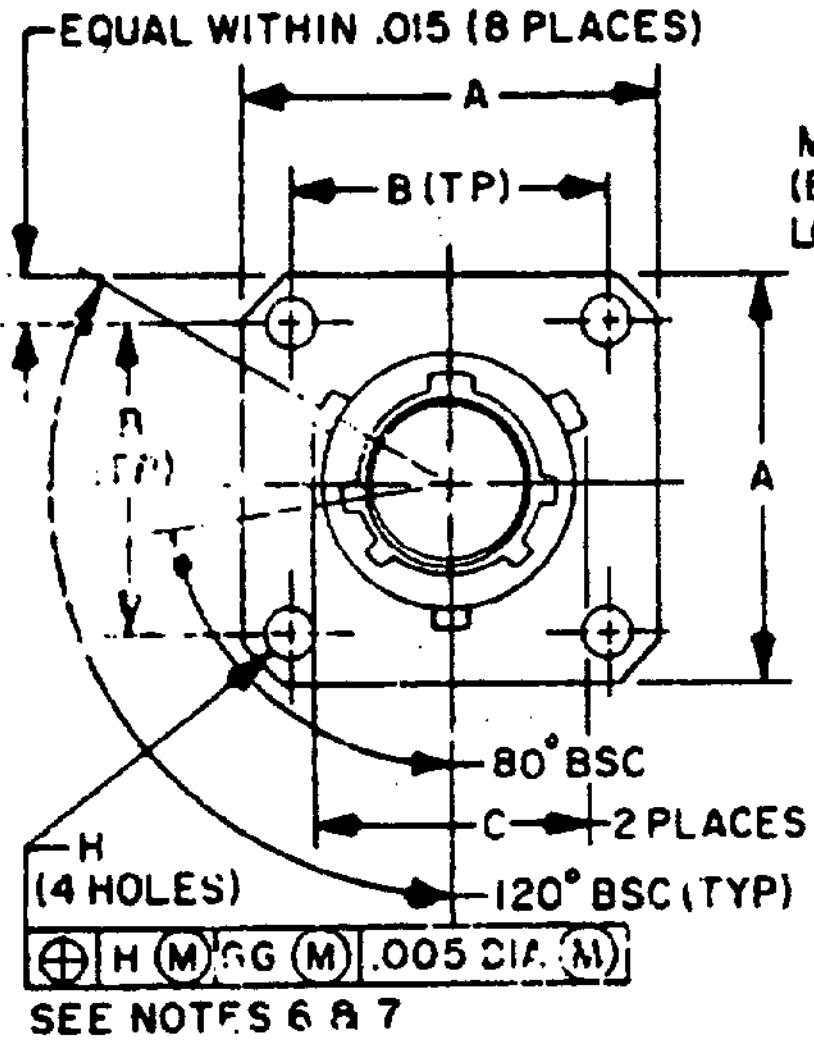

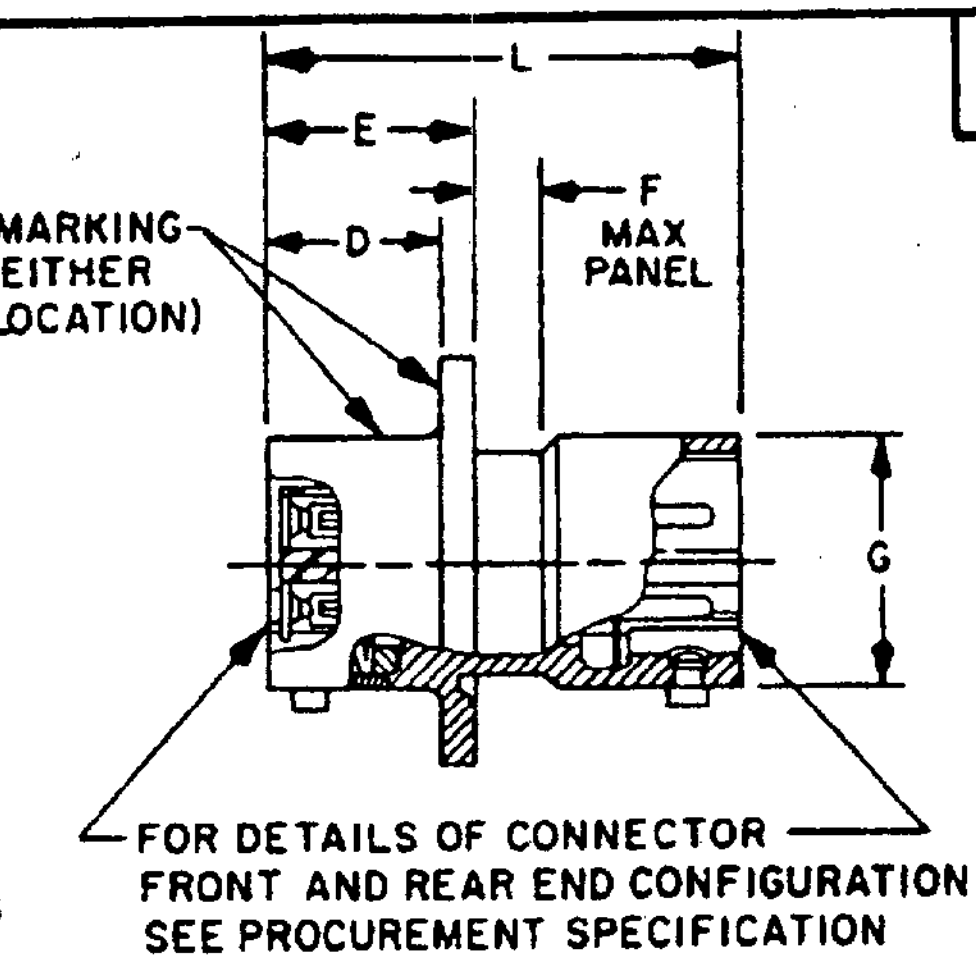
L
E
D
F
MAX
PANEL
MARKING
(EITHER
LOCATION)
G
FOR DETAILS OF CONNECTOR
FRONT AND REAR END CONFIGURATION
SEE PROCUREMENT SPECIFICATION

NOTE: APPROVAL OF THIS FINAL DRAFT IS SUBJECT TO PREPARING ACTIVITY REVIEW. DO NOT USE FOR PROCUREMENT PURPOSES.

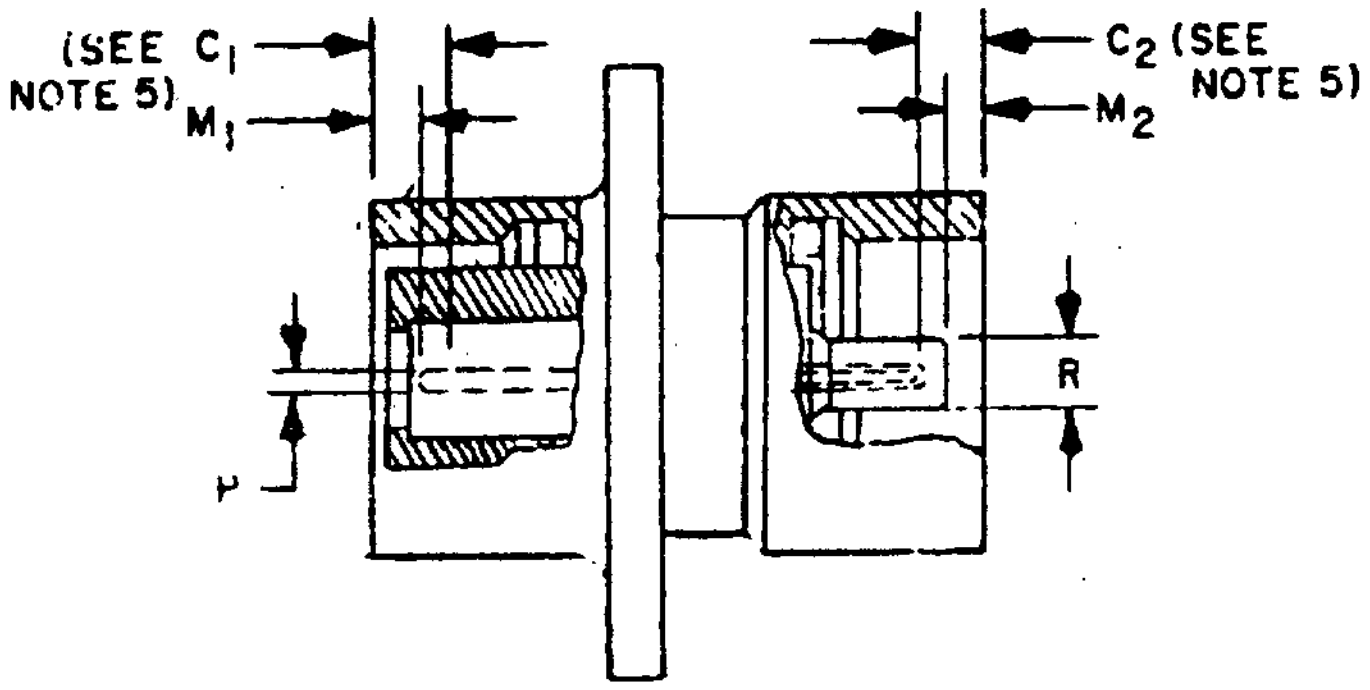

CLASS E FINISH: SEE PROCUREMENT SPECIFICATION

TABLE II. Operating voltage.

Service ratings	Operating voltage (sea level)	
	AC (rms)	DC
M	400	550
I	600	850
II	900	1250

TABLE I.

Shell size	A ±.020	B (TP)	C +.000 -.016	D +.000 -.005	E +.006 -.001	F MAX 1/	G +.001 -.005	H +.010 -.005	L MAX
8	.812	.594	.563	.322	.380	.125	.473	.120	.835
10	.938	.719	.680				.590		
12	1.031	.812	.859				.750		
14	1.125	.906	.984				.875		
16	1.219	.969	1.108				1.000		
18	1.312	1.062	1.233				1.125		
20	1.438	1.156	1.358				1.250		
22	1.562	1.250	1.483				1.375		
24	1.688	1.375	1.610				1.500	.147	

1/ F dimension excludes mounting hardware.

TABLE III. Additional dimensional requirements when insert arrangement contains shielded contacts.

C_1	M_1	C_2	M_2	Contact size	P Dia	R Dia
.111 Max	.095 .059	.098 Max	.067 .031	12	.0200 ±.0005	.094 ±.001

For changes see pages 1 & 2

Ⓔ CANCELED WITH NO SUPERSEDING STANDARD

APPROVED 10 Nov 1972 REVISED Ⓐ 7 Sep 1973 Ⓑ 26 Mar 1974 Ⓒ 2 Jan 1976 Ⓓ 10 NOVEMBER 1978 Ⓔ 9 MAR 88

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

User activities: Army -
Navy - OS
Air Force -

P.A AF - 85

Other Cust
Army - CR
Navy - AS

International interest

TITLE
CONNECTOR, ELECTRICAL, RECEPTACLE, THRU-BULKHEAD, BAYONET COUPLING, SERIES II

MILITARY STANDARD
MS27667

Procurement Specification
MIL-C-38999

SUPERSEDES:
MS0027667(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
5935

REQUIREMENTS: In addition to the requirements of MIL-C-38999, the connector shall meet the following requirements:

1. Contact resistance shall be 125 percent of that specified in table V of MIL-C-39029.
2. Connectors shall show no leakage in excess of one atmospheric cubic inch of air per hour (4.55×10^{-3} cm^3/s) when subjected to a pressure differential of one atmosphere across the connector as specified in MIL-C-27599 for class T.
3. Dimensional requirements using shielded contacts shall be as shown in table III.

EXAMPLE OF PART NUMBER

MS27667	E	11	B	35	C	A
MS NO	CLASS	SHELL SIZE	FINISH	INSERT ARR	STYLE SEE NOTE 2	POLARIZATION (NO LETTER REQUIRED FOR NORMAL)

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0005	.013	.094	2.39	.590	14.99	.969	24.61	1.312	33.32
.001	.03	.095	2.41	.594	15.09	.984	24.99	1.358	34.49
.005	.13	.098	2.49	.680	17.27	1.000	25.40	1.375	34.92
.006	.15	.111	2.82	.719	18.26	1.031	26.19	1.438	36.53
.010	.25	.120	3.05	.750	19.05	1.062	26.97	1.483	37.67
.011	.28	.125	3.18	.812	20.62	1.108	28.14	1.500	38.10
.016	.41	.147	3.73	.835	21.21	1.125	28.58	1.562	39.67
.020	.51	.322	8.18	.859	21.82	1.156	29.36	1.610	40.89
.031	.79	.380	9.65	.875	22.22	1.219	30.96	1.688	42.88
.059	1.50	.423	10.74	.906	23.01	1.233	31.32		
.067	1.70	.563	14.30	.938	23.83	1.250	31.75		

NOTES:
1. Dimensions are in inches.
2. In example of part number, style C indicates feed through contacts.
3. This standard takes precedence over procurement documents referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitation for bid.
5. C_1 and C_2 locate the points at which a gage pin, having the same basic diameter as the contact and a square face, touches the socket contact spring.
6. The gage feature for GG shall be .010 smaller than the MMC size at basic location.
7. For main key and keyway positions, see figure 1 of MIL-C-38999.
8. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
9. For insert arrangements see MIL-STD-1560.
10. Operating voltages are listed in table II for guidance.

his military standard is approved for use by all Departments and Agencies of the epartment of Defense. Selection for all new engineering and design applications nd for repetitive use shall be made from this document when applicable.

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

User activities: Army -
Navy - OS
Air Force -

P.A AF - 85

Other Cust
Army - CR
Navy - AS

International interest

TITLE
CONNECTOR, ELECTRICAL, RECEPTACLE,
THRU-BULKHEAD, BAYONET COUPLING,
SERIES II

MILITARY STANDARD
MS27667

Procurement Specification
MIL-C-38999

SUPERSEDES:
MS0027667(USAF)

PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.