FED. SUP CLASS
5305

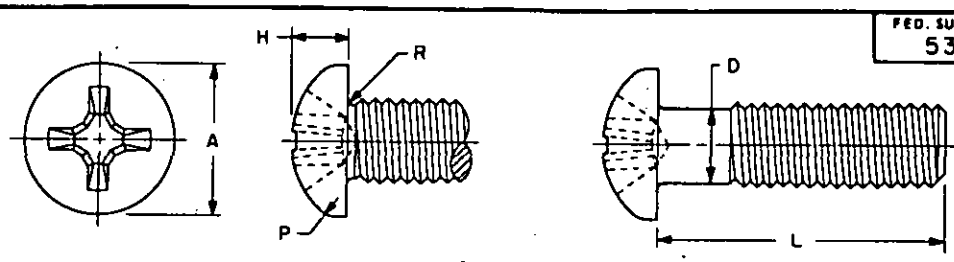


TABLE I

	NOMINAL SIZE		.086	.112	.138	.164	.190	.250	.3125	.375
	THREADS PER INCH (UNC-2A)		56	40	32	32	24	20	18	16
D	BODY DIAMETER	MAX	.0860	.1120	.1380	.1640	.1900	.2500	.3125	.3750
		MIN	.0717	.0925	.1141	.1399	.1586	.2127	.2712	.3287
A	HEAD DIAMETER	MAX	.167	.219	.270	.322	.373	.492	.615	.740
		MIN	.155	.205	.256	.306	.357	.473	.594	.716
H	HEAD HEIGHT	MAX	.062	.080	.097	.115	.133	.175	.218	.261
		MIN	.053	.070	.087	.105	.122	.162	.203	.244
P	HEAD RADIUS	MIN	.010	.010	.015	.015	.020	.035	.040	.040
R	FILLET RADIUS	MAX	.013	.017	.021	.025	.029	.038	.047	.056
	DRIVER SIZE		1	1	2	2	2	3	4	4
	TENSILE STRENGTH (LBS-MIN) (B)		225	370	560	860	1080	1970	3250	4800

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.12		1	10	21	36				
.19		2	11	22	37				
.25		3	12	23	38	51			
.31		4	13	24	39	52	66		
.38	+.00	5	14	25	40	53	67	80	
.44	-.03	6	15	26	41	54	68	81	
.50		7	16	27	42	55	69	82	93
.62		8	17	28	43	56	70	83	94
.75		9	18	29	44	57	71	84	95
.88			19	30	45	58	72	85	96
1.00			20	31	46	59	73	86	97
1.25				32	47	60	74	87	98
1.50	+.00			33	48	61	75	88	99
1.75	-.06			34	49	62	76	89	100
2.00				35	50	63	77	90	101
2.25						64	78	91	102
2.50	+.00					65	79	92	103
2.75	-.09								104
3.00									105

NOTES:
(B) 1. MATERIAL: Aluminum alloy, 2024, in accordance with QQ-A-200/3 or QQ-A-225/6. The minimum ultimate tensile strength shall be 62,000 PSI.
2. PROTECTIVE COATING: Anodized in accordance with MIL-A-8625, Type I or II, Class 1.
3. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
(B) 4. THREAD LENGTH: Full form threads shall extend to within 2 threads or less of head bearing surface for lengths thru 2.00 inches. Longer lengths shall have a minimum full form thread length of 1.50 inches.
5. RECESS: The recess shall be in accordance with MS9006.
6. DIMENSIONS: All dimensions are in inches.
7. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35218-1.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(B) FOR CHANGES SEE SHEET 1.

REVIEWER: AV, EA, IS, AT, EL, MC
USER: ME, MU, PA, SH, WT

APPROVED 25 JUN 1953 REVISED (A) 17 DEC 1962 (B) 12 JUN 1974

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust YD 82	TITLE SCREW, MACHINE-PAN HEAD, CROSS-RECESSED, ALUMINUM ALLOY, UNC-2A	MILITARY STANDARD MS 35218
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35235, MS35313 and in part: MS35357, MS35359 thru MS35362, MS35364 thru MS35366, AN515 and AN526	SHEET 1 OF 3

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:11Z
Check the source to verify that this is the current version before use.

REVIEWER: AV, EA, IS
USER: AT, EL, MC, ME, MU, PA, SH, WT

TABLE II
INTERCHANGEABILITY

Screws covered by dash numbers given in MS35235 and MS35313 are canceled after 17 December 1962. The canceled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for new design and engineering. Replacement shall be in accordance with this table.

PART NUMBER	
CANCELED	SUPERSEDING
MS35235	MS35218
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	**
11	10
12	11
13	12
14	13
15	14
16	15
17	16
18	17
19	18
20	19
21	20
22	**
23	**
24	21
25	22
26	23
27	24
28	25
29	26
30	27
31	28
32	29
33	30
34	31
35	32
36	33
37	34
38	35

PART NUMBER	
CANCELED	SUPERSEDING
MS35235	MS35218
39	36
40	37
41	38
42	39
43	40
44	41
45	42
46	43
47	44
48	45
49	46
50	47
51	48
52	49
53	50
54	**
55	**
56	**
57	**
58	**
59	51
60	52
61	53
62	54
63	55
64	56
65	57
66	58
67	59
68	60
69	61
70	62
71	63
72	64
73	65
74	**
75	**
76	66

PART NUMBER		
CANCELED		SUPERSEDING
MS35235	MS35313	MS35218
77	1	67
78	2	68
79	3	69
	4	**
80	5	70
81	6	71
82	7	72
83	8	73
	9	**
84	10	74
	11	**
85	12	75
86	13	76
87	14	77
88	15	78
89	16	79
90	17	**
91	THRU	**
	26	**
92	27	80
93	28	81
94	29	82
	30	**
95	31	83
96	32	84
97	33	85
98	34	86
	35	**
99	36	87

PART NUMBER		
CANCELED		SUPERSEDING
MS35235	MS35313	MS35218
	37	**
100	38	88
101	39	89
102	40	90
103	41	91
104	42	92
105	43	**
106	THRU	**
	54	**
107	55	93
	56	**
108	57	94
109	58	95
110	59	96
111	60	97
	61	**
112	62	98
	63	**
113	64	99
114	65	100
115	66	101
116	67	102
117	68	103
118	69	104
119	70	105
	71	**
	THRU	**
	283	**

** No replacement

APPROVED 25 JUN 1953 REVISED (A) 17 DEC 1962 (B) FOR CHANGES SEE SHEET 1.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust YD 82	TITLE SCREW, MACHINE-PAN HEAD, CROSS-RECESSED, ALUMINUM ALLOY, UNC-2A	MILITARY STANDARD MS 35218
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35235, MS35313 and in part: MS35357, MS35359 thru MS35362, MS35364 thru MS35366, AN515 and AN526.	SHEET 2 OF 3

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:11Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

TABLE III
INTERCHANGEABILITY

Screws covered by the following dash numbers given in AN515 in part and AN526 in part are canceled after 17 December 1962. The canceled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for new design and engineering. Replacement shall be in accordance with this table and as follows: AN515 and AN526 dash numbers having an "R" in place of the "-" are superseded by the same MS35218 dash numbers as those having the "-".

PART NUMBER		
CANCELED		SUPERSEDING
AN515	AN526	MS35218
DD2-2		1
DD2-3		2
DD2-4		3
DD2-5		4
DD2-6		5
DD2-7		6
DD2-8		7
DD2-10		8
DD2-12		9
DD3-2		**
THRU		**
DD3-16		**
DD4-3		11
DD4-4		12
DD4-5		13
DD4-6		14
DD4-7		15
DD4-8		16
DD4-10		17
DD4-12		18
DD4-14		19
DD4-16		20
DD4-18		**
THRU		**
DD4-28		**
DD5-3		**
THRU		**
DD5-28		**
DD6-3		22
DD6-4	DD632-4	23
DD6-5	DD632-5	24
DD6-6	DD632-6	25
DD6-7	DD632-7	26
DD6-8	DD632-8	27
	DD632-9	**
DD6-10	DD632-10	28
DD6-12	DD632-12	29
DD6-14	DD632-14	30
DD6-16	DD632-16	31
DD6-18	DD632-18	**
DD6-20	DD632-20	32
DD6-22	DD632-22	**
DD6-24	DD632-24	33
DD6-26	DD632-26	**
DD6-28	DD632-28	34
DD6-30	DD632-30	**
DD6-32	DD632-32	35
DD6-36	DD632-36	**
DD6-40	DD632-40	**
DD6-44	DD632-44	**

PART NUMBER		
CANCELED		SUPERSEDING
AN515	AN526	MS35218
	DD632-48	**
DD8-4	DD832-4	38
DD8-5	DD832-5	39
DD8-6	DD832-6	40
DD8-7	DD832-7	41
DD8-8	DD832-8	42
	DD832-9	**
DD8-10	DD832-10	43
DD8-12	DD832-12	44
DD8-14	DD832-14	45
DD8-16	DD832-16	46
DD8-18	DD832-18	**
DD8-20	DD832-20	47
DD8-22	DD832-22	**
DD8-24	DD832-24	48
DD8-26	DD832-26	**
DD8-28	DD832-28	49
DD8-30	DD832-30	**
DD8-32	DD832-32	50
DD8-36	DD832-36	**
DD8-40	DD832-40	**
DD8-44	DD832-44	**
DD8-48	DD832-48	**
DD10-4	DD1024-4	51
DD10-5	DD1024-5	52
DD10-6	DD1024-6	53
DD10-7	DD1024-7	54
DD10-8	DD1024-8	55
	DD1024-9	**
DD10-10	DD1024-10	56
DD10-12	DD1024-12	57
DD10-14	DD1024-14	58
DD10-16	DD1024-16	59
DD10-18	DD1024-18	**
DD10-20	DD1024-20	60
DD10-22	DD1024-22	**
DD10-24	DD1024-24	61
DD10-26	DD1024-26	**
DD10-28	DD1024-28	62
DD10-30	DD1024-30	**
DD10-32	DD1024-32	63
DD10-36	DD1024-36	64
DD10-40	DD1024-40	65
DD10-44	DD1024-44	**
DD10-48	DD1024-48	**
DD416-5		66
DD416-6	DD420-6	67
DD416-7	DD420-7	68
DD416-8	DD420-8	69
	DD420-9	**

PART NUMBER		
CANCELED		SUPERSEDING
AN515	AN526	MS35218
DD416-10	DD420-10	70
DD416-12	DD420-12	71
DD416-14	DD420-14	72
DD416-16	DD420-16	73
DD416-18	DD420-18	**
DD416-20	DD420-20	74
DD416-22	DD420-22	**
DD416-24	DD420-24	75
DD416-26	DD420-26	**
DD416-28	DD420-28	76
DD416-30	DD420-30	**
DD416-32	DD420-32	77
DD416-36	DD420-36	78
DD416-40	DD420-40	79
DD416-44	DD420-44	**
DD416-48	DD420-48	**
DD516-8		82
DD516-10		83
DD516-12		84
DD516-14		85
DD516-16		86
DD516-18		**
DD516-20		87
DD516-22		**
DD516-24		88
DD516-26		**
DD516-28		89
DD516-30		**
DD516-32		90
DD516-36		91
DD516-40		92
DD516-44		**
DD516-48		**
DD616-8		93
DD616-10		94
DD616-12		95
DD616-14		96
DD616-16		97
DD616-18		**
DD616-20		98
DD616-22		**
DD616-24		99
DD616-26		**
DD616-28		100
DD616-30		**
DD616-32		101
DD616-36		102
DD616-40		103
DD616-44		104
DD616-48		105

** No Replacement

REVIEWER: AV, EA, IS
USER: AT, EL, MC, ME, MU, PA, SH, WT

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 25 JUN 1953 REVISED (A) 17 DEC 1962 (B) FOR CHANGES SEE SHEET 1.

P.A.	WC
Other Cost	YD 82

TITLE: SCREW, MACHINE-PAN HEAD, CROSS-RECESSED, ALUMINUM ALLOY, UNC-2A

MILITARY STANDARD
MS 35218

PROCUREMENT SPECIFICATION	SUPERSEDES:
FF-S-92	MS35235, MS35313 and in part: MS35357, MS35359 thru MS35362, MS35364 thru MS35366, AN515 and AN526.

SHEET 3 OF 3

DD FORM 672-1 (Considered)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1974-713-155/6662

Source: https://assist.dla.mil/online/start/ 20240420T17:11Z
Check the source to verify that this is the current version before use.