
FED. SUP CLASS
5305

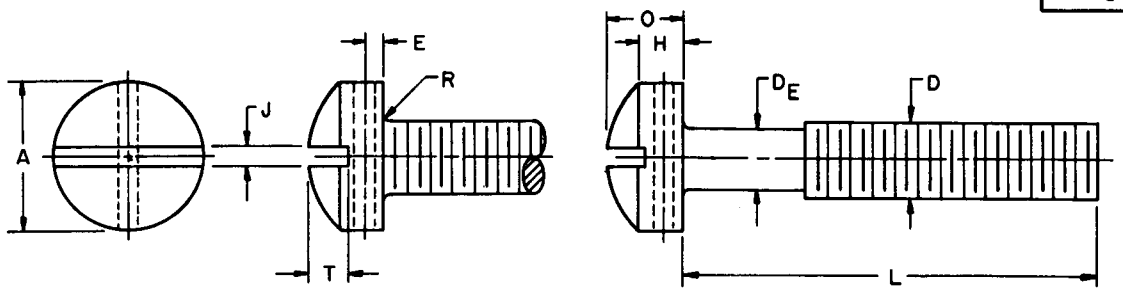

NOMINAL SIZE	D		2 (.086)	4 (.112)	6 (.138)	8 (.164)
THREADS PER INCH			56NC	40NC	32NC	32NC
BODY DIAMETER	D_e	Max	.0860	.1120	.1380	.1640
		Min	.0717	.0925	.1141	.1399
HEAD DIAMETER	A	Max	.140	.183	.226	.270
		Min	.124	.166	.208	.250
HEAD HEIGHT	H	Max	.062	.079	.096	.113
		Min	.055	.072	.089	.106
TOTAL HEAD HEIGHT	O	Max	.083	.107	.132	.156
		Min	.070	.094	.118	.141
SLOT WIDTH	J	Max	.031	.039	.048	.054
		Min	.023	.031	.039	.045
SLOT DEPTH	T	Max	.030	.038	.045	.065
		Min	.022	.030	.035	.054
NOMINAL DRILL LOCATION	E		.026	.035	.043	.043
NOMINAL DRILL SIZE			.031	.037	.046	.046
RADIUS	R	Max	.013	.118	.023	.023

LENGTH	L	Tolerance	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8		1		11		24		39	
	3/16		2		12		25		40	
	1/4		3		13		26		41	058-8495
	5/16		4		14		27		42	043-2747
	3/8	+0	5		15		28		43	058-7639
	7/16	-1/32	6		16		29		44	058-3744
	1/2		7		17		30	059-3404	45	058-7640
	5/8		8		18		31		46	054-1868
	3/4		9		19		32		47	045-3031
	7/8		10		20		33		48	058-7641
	1				21		34		49	058-8496
	1-1/4	+0			22		35		50	058-8498
	1-1/2	-1/16			23		36	059-3405	51	058-8499
	1-3/4						37		52	058-8500
	2						38		53	058-8501
Minimum complete thread length of 1-3/4.	2-1/4	+0							54	
	2-1/2	-3/32							55	
	2-3/4								56	
	3								57	

MATERIAL: Carbon Steel, Specification QQ-W-409 or QQ-S-633, except Bessemer compositions; 55,000 PSI minimum ultimate tensile strength.

FINISH: Cadmium or Zinc plated; Specification QQ-P-416, type II, class C or Specification QQ-Z-325, type II, class 3.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

NOTES:
(1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS35267-1.
(4) Drilled hole to be on center approximately at right angle to the slot but must not break through the base or top (spherical portion) of the head.
(5) Screws shall be free of all loose or hanging burrs or slivers which might become dislodged under usage.
(6) All dimensions in inches.

Ⓑ CANCELLED
SEE SHEET 2

Ⓑ For changes see sheets 1 and 2.

APPROVED FEB 9, 1954 REVISED Ⓐ 15 JUN 1962 Ⓑ 12 Nov 1964

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	SH 69

TITLE
SCREW, MACHINE, DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, CADMIUM OR ZINC PLATED, NC-2A AND UNC-2A

MILITARY STANDARD
MS 35267

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

NOMINAL SIZE	D		10 (.190)	1/4	5/16	3/8
THREADS PER INCH			24NC	20UNC	18UNC	16UNC
BODY DIAMETER	D_e	Max	.1900	.2500	.3125	.3750
		Min	.1586	.2127	.2712	.3287
HEAD DIAMETER	A	Max	.313	.414	.518	.622
		Min	.292	.389	.490	.590
HEAD HEIGHT	H	Max	.130	.170	.211	.253
		Min	.123	.161	.201	.242
TOTAL HEAD HEIGHT	O	Max	.180	.237	.295	.355
		Min	.165	.219	.276	.333
SLOT WIDTH	J	Max	.060	.075	.084	.094
		Min	.050	.064	.072	.081
SLOT DEPTH	T	Max	.075	.102	.130	.154
		Min	.064	.087	.110	.134
NOMINAL DRILL LOCATION	E		.043	.062	.078	.094
NOMINAL DRILL SIZE			.046	.062	.070	.070
RADIUS	R	Max	.031	.025	.027	.031

LENGTH	L	Tolerance	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8									
	3/16		58							
	1/4		59	022-1372						
	5/16		60	058-8502	76	058-8535				
	3/8	+0	61	058-8503	77	058-8536	92	058-8547		
	7/16	-1/32	62	058-7642	78	058-8537	93	058-3745		
	1/2		63	054-1874	79	058-8538	94	058-8548	107	058-8560
	5/8		64	054-4396	80	058-8539	95	058-8549	108	058-8561
	3/4		65	058-8504	81	058-8540	96	058-8550	109	058-8562
	7/8		66	058-8505	82	058-8541	97	058-8551	110	058-8563
	1		67	058-8506	83	058-8542	98	058-8552	111	058-8564
	1-1/4	+0	68	022-5829	84	058-8543	99	058-8554	112	058-8566
	1-1/2	-1/16	69	058-8508	85	058-8544	100	058-8555	113	058-8567
	1-3/4		70	058-8509	86	058-8545	101	058-8556	114	058-8568
	2		71	058-8510	87	058-8546	102	058-8557	115	058-8569
Minimum complete thread length of 1-3/4.	2-1/4	+0	72		88		103		116	
	2-1/2	-3/32	73		89		104		117	
	2-3/4		74		90		105		118	
	3		75		91		106		119	

MATERIAL: Carbon Steel, Specification QQ-W-409 or QQ-S-633, except Bessemer compositions: 55,000 PSI minimum ultimate tensile strength.

FINISH: Cadmium or Zinc plated: Specification QQ-P-416, type II, class C or Specification QQ-Z-325, type II, class 3.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

NOTES: (1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35267-58.
(4) Drilled hole to be on center approximately at right angle to the slot but must not break through the base or top (spherical portion) of the head.
(5) Screws shall be free of all loose or hanging burrs or slivers which might become dislodged under usage.
(6) All dimensions in inches.

(B) REINSTATED AND CANCELLED AFTER 12 Nov 1964 Use MS35265. INTERCHANGEABILITY RELATIONSHIP - MS35265 can replace the cancelled screws of the same size. The cancelled MS35267 cannot always replace MS35265 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

(B) CANCELLED SEE NOTE

APPROVED FEB 9, 1954 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2. (B) FOR CHANGES SEE SHEETS 1 AND 2.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	SH 69

TITLE: SCREW, MACHINE, DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, CADMIUM OR ZINC PLATED, NC-2A AND UNC-2A

MILITARY STANDARD

MS 35267

PROCUREMENT SPECIFICATION: FF-S-92

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.