
FED. SUP CLASS
2320

USER ACTIVITIES:

REVIEWER ACTIVITIES:

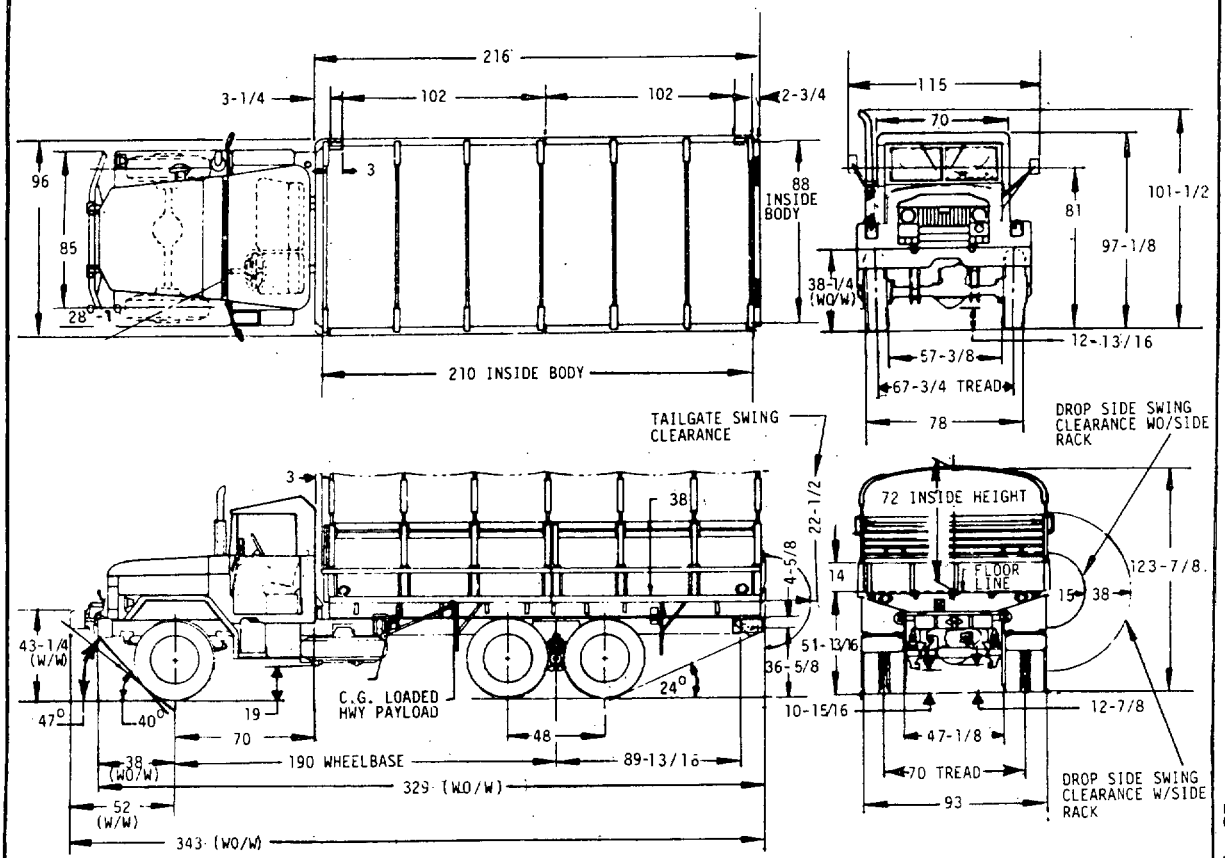

VEHICLE CHARACTERISTICS

CHASSIS:	MODEL NO. M46A2
CHASSIS, WITH WINCH	8736603
CHASSIS, WITHOUT WINCH	8736573

CURB WEIGHT: FULLY EQUIPPED, LESS PAYLOAD AND CREW	WO/W	W/W
FRONT AXLE	6510	7140
REAR BOGIE	8380	8270
TOTAL LBS	14890	15410

PAYLOAD:		
LOADED	5000 LBS	5000 LBS

GROSS WEIGHT: FULLY EQUIPPED. **PLUS PAYLOAD LESS CREW **ADD 400 LBS, FOR 2 MAN CREW W/EQUIPMENT		
FRONT AXLE	6745	7375
REAR BOGIE	13145	13035
TOTAL LBS	19890	20410

REAR SUSPENSION:	INST'N 8757834
REAR AXLE, TWO	7368511
REAR SPRINGS, TWO	7368629
TORQUE ROD ASSY., SIX	8757685

TIE DOWNS: TOTAL 14 — 11647735
LOCATIONS, 7 EACH SIDE, 2 FRONT, 2 REAR

SHACKLE: FOUR, TWO FRONT, TWO REAR — 7539662

WHEELS: TYPE-STEEL DISC — 7389621
SIZE: 20 X 7-1/2 6-1/4 OFFSET
FRONT-SINGLE, REAR-DUAL

TIRES: 10 PLUS 1 SPARE
SIZE: 9.00 X 20. 8 PLY
MIL-T-46729, OR STYLE A, MIL-T-12459

TUBES: ZZ-I-550

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS 500080 -1	8736593	WITH WINCH
MS 500080 -2	8736592	LESS WINCH

APPROVED 4 MAY 1967 REVISED © 6 MAY 85

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: TRUCK, CARGO: MILITARY MODEL M36A2 2-1/2 TON, 6x6, 190 INCH WHEELBASE, MULTIFUEL ENGINE	MILITARY STANDARD MS500080(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES
REVIEWER ACTIVITIES
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS 2320

VEHICLE CHARACTERISTICS

TRANSMISSION ASSY: W/W 10872194; WO/W 10872096
TYPE; SYCROMESH
FORWARD SPEEDS; 5, REVERSE; 1
GEAR RATIOS; FORWARD, 5.02:1, 2.78:1, 1.62:1, .79:1
GEAR RATIO; REVERSE, 4.90:1

TRANSFER CASE: 10937636

TOWED LOAD ALLOWANCE:

LOADED	6000 LBS	6000 LBS

FORDING DEPTH:

W/KIT	WO/KIT
72 IN.	30 IN.

SHIPPING DIMESIONS:

	WO/W	W/W
CU. FT.	1483	1544
SQ. FT.	219	229

BODY ASSY.:

CARGO BODY	INST'N	8757819
CARGO BODY		8757820

GENERAL:
THIS VEHICLE IS USED TO TRANSPORT GENERAL CARGO OR PERSONNEL. THE CAB IS CANVAS COVERED, OPEN TYPE. THE BODY IS 17-1/2 FT. (210 X 88 IN. INSIDE) FLAT BED TYPE; STEEL CONSTRUCTION. SIDES AND TARPAULIN FRAMES ARE ARE REMOVABLE, 14 INCH SIDES, WITH RIGHT SIDE HINGED LONGITUDINALLY BELOW FLOOR. 16 INCH TAILGATE, 72 INCH FLOOR TO UNDERSIDE OF BOWS. COMPLETE WITH SIDE RACKS AND TARPS, TROOP SEATS NOT FURNISHED.

BODY CARGO SPACE: 851 CU. FT.
BODY INCLUDES SEVEN TOP BOWS WITH TARPAULINS AND END FLAPS. STEP ON TAILGATE FOR EASE OF ENTRANCE. FOUR AMBER REFLECTORS, TWO ON FRONT, ONE EACH SIDE FORWARD. FOUR RED REFLECTORS, TWO ON REAR, ONE EACH SIDE REARWARD.

ENGINE: MODEL LDT-465-1C 11642105
W/CLUTCH 11642117
TYPE; 6 CYL, IN LINE, COMPRESSION IGNITION DISPLACEMENT; 478 CU. IN. BORE & STROKE, 4.56 X 4.88 COMPRESSION RATIO; 22:1 FUEL; MULTIFUEL FUEL CAPACITY; 50 GALS GOV SPEED; 2600 RPM
HORSEPOWER; GROSS 130 @ 2600 RPM
NET 113 @ 2600 RPM
TORQUE; GROSS 305 LB. FT. @ 1500 RPM
NET 297 LB. FT. @ 1500 RPM

CLUTCH PEDAL: INST'N 8757745

CLUTCH DRIVEN MEMBER ASSY	11668332
CLUTCH ASSY	11601174
CLUTCH PRESSURE PLATE ASSY	11677768

FRAME ASSY: CHASSIS 11609287-1

TRANSFER TRANS.: 11609224
GEAR RATIOS; HIGH 1:1
LOW 1.98:1

FRONT SUSPENSION: INST'N 10872040

FRONT AXLE	7521734-1
FRONT SPRINGS, TWO	11601335
SHOCK ABSORBERS, TWO	7539007

CAB ASSY: SOFT TOP 10896757

STEERING	INST'N	10897162
INSTRUMENT PANEL	INST'N	10937450
TACHOMETER	INST'N	10896303
SPEEDOMETER	INST'N	10937442
THROTTLE LINKAGE	INST'N	10896671-1

AIR CLEANER; INST'N 10896886-1

FUEL SYSTEM: INST'N 10897080

EXHAUST SYSTEM; INST'N 11677097

WINCH: INST'N 10872197
WINCH, 10000 #CAPACITY 7538687

PINTLE: 10000 #CAPACITY INST'N 11609483
PINTLE 7722050-1

BRAKES:

AIR	INST'N	11647739
HYDRAULIC	INST'N	10937705-2
HAND BRAKE	INST'N	11609817

ELECTRICAL SYSTEM: INST'N 10896899
POTENTIAL, 24 VOLT

STARTING MOTOR	10911018
ALTERNATOR: 60 AMPS	10929868
BATTERIES, 12 VOLT, 6 TN, TWO	MS35000-4
TURN SIGNAL, REGULATOR	11613631
LIGHTING, HEADLAMPS	8741462
DRIVING LAMP, BLACKOUT	11668932
TRAILER COUPLING SOCKET	8376209
COMPOSITE LIGHT, FRONT	11614156
COMPOSITE LIGHT, TAIL	11614157

PERFORMANCE:

AT GROSS WEIGHT	W/O TOWED LOAD	W/TOWED LOAD
MAXIMUM SPEED	56 MPH	45 MPH
MAXIMUM GRADE	60%	45%
CRUISING RANGE W/DIESEL FUEL	300 MILES	275 MILES

ADDITIONAL EQUIPMENT AVAILABE:

FORDING KIT	10937874-2
CLOSURE ASSY., HARD TOP	7085350
ARCTIC HEATER KIT, PERSONNEL	10896388
A FRAME KIT, DERRICK	8390117
AIR BRAKE KIT	10937003
SLAVE RECEPTACLE KIT	10896518

REAR SUSPENSION: 8757834

NOTES:
1. *DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.*
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.
4. SUBJECT OF NATO STANAG 2805-(EDITION 3). DO NOT REVISE OR CHANGE.

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS 500080-1	8736593	WITH WINCH
MS 500080-2	8736592	LESS WINCH

APPROVED 4 MAY 1967 REVISED © 6 MAY 85

© ENTIRE STANDARD REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, CARGO: MILITARY MODEL M36A2 2-1/2 TON, 6x6, 190 INCH WHEELBASE, MULTIFUEL ENGINE	MILITARY STANDARD MS500080(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 LIMITED COORDINATIC

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.