This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


User activities: Army - AR, ME; Navy - AS, SH, MC, OS; Air Force - 19

Review activities: Army - MI, ME; Navy - ; Air Force - 11, 17; DLA - ES

APPROVED 24 Mar 59 REVISED (A) 18 Oct 62 (B) 25 Mar 63 (C) 14 Mar 72 (D) 31 Oct 72 (E) 4 September 1985

FED. SUP CLASS 5950

(E) INACTIVE FOR NEW DESIGN AFTER 4 September 1985 USE MIL-C-39010/4

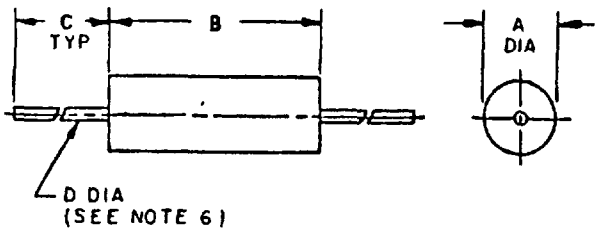


## RATINGS

| | |
|---|---|
| Style | LT4 |
| Grade | 1 |
| Class | B |
| Temperature rise | 35°C |
| Ambient temperature | 90°C |
| Operating temperature | -55° to+125°C |
| Dielectric withstanding Voltage (sea level) | 1000 volts rms for a minimum of 60 sec. |
| Dielectric withstanding Voltage (reduced barometric pressure) | 200 volts rms for a minimum of 60 sec. |
| Terminal pull | 5 pounds |
| Altitude | 70,000 feet |
| Weight | .95 gram max. |

| Ltr | Dimensions in inches with metric equivalents (mm) in parentheses | |
|---|---|---|
| | Minimum | Maximum |
| A | .156 (3.96) | .219 (5.56) |
| B | .406(10.31) | .469(11.91) |
| C | 1.250(31.75) | 1 625(41.28) |
| D | .023 (.58) | .027 (.69) |

ELECTRICAL CHARACTERISTICS (INITIAL)

| Dash No 1/ 2/ | Type designation | Former type designation | Former MS part No. | Inductance | Q, min | Test frequency | Self-resonant frequency, min | DC resistance, max | Rated DC current |
|---|---|---|---|---|---|---|---|---|---|
| | | | | uH | | MHz | MHz | Ohms | mA |
| -21 | LT1K027 | LT7K125 | MS16224 1 and MS75008-1 | 10 1 ±20% | 55 | 25 0 | 510 | 0 030 | 3,000 |
| -22 | LT1K028 | LT7K126 | MS16224-2 and MS75008-2 | 10 22 ±20% | 50 | 25 0 | 415 | 0 035 | 2,800 |
| -23 | LT1K029 | LT7K127 | MS16224-3 and MS75008-3 | 10 33 ±20% | 50 | 25 0 | 350 | 0 065 | 2,000 |
| -24 | LT1K030 | LT7K128 | MS16224-4 and MS75008-4 | 10 47 ±20% | 50 | 25 0 | 300 | 0 085 | 1,700 |
| -25 | LT1K031 | | | 10.56 ±10% | 50 | 25 0 | 270 | 0 125 | 1,450 |
| -26 | LT4K032 | LT7K129 | MS16224-5 and MS75008-5 | 10 68 ±10% | 45 | 25 0 | 250 | 0 150 | 1,300 |
| -27 | LT1K033 | | | 10 82 ±10% | 40 | 25 0 | 210 | 0 205 | 1,100 |
| -28 | LT1K034 | LT7K130 | MS16224-6 and MS75008-6 | 11 00 ±10% | 40 | 25 0 | 200 | 0 290 | 930 |
| -29 | LT1K035 | | | 11.20 ±10% | 30 | 7 9 | 160 | 0 400 | 785 |
| -30 | LT1K036 | LT7K131 | MS16224-7 and MS75008-7 | 11 50 ±10% | 30 | 7 9 | 170 | 0 485 | 700 |
| -31 | LT K037 | | | 11 80 ±10% | 30 | 7 9 | 150 | 0 740 | 580 |
| -32 | LT K038 | LT7K132 | MS16224-8 and MS75008-8 | 12 20 ±10% | 30 | 7 9 | 140 | 0 970 | 505 |
| -33 | LT4K039 | LT7K133 | MS16224-9 and MS75008-9 | 12 70 ±10% | 30 | 7 9 | 120 | 1 20 | 460 |

1/ The dash number added to the MS military-standard number constitutes the MS part number for example, MS75008-21.
2/ See note 11

(E) Denotes changes

| | | | |
|---|---|---|---|
| P A ARMY - ER<br>Other Cust<br>AF-85<br>NAVY - EC | International Interest | TITLE<br>COILS, RADIOFREQUENCY, MOLDED, FIXED, SUBMINIATURE (PHENOLIC CORE) TYPES LT4K027 TO LT4K039 INCL | MILITARY STANDARD<br>MS 75008 |
| Procurement Specification<br>MIL-C-15305 | | SUPERSEDES | PAGE 1 OF 2 |

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5950-0650-01

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable



FED SUP CLASS
5950

Electrical characteristics (final).

| Inspection Group | Allowable variation from initial measurement | | Allowable % from specified minimum value in Electrical Characteristics (initial) table | |
|---|---|---|---|---|
| | Inductance | DC resistance | Self-resonant frequency | Q |
| | Percent | | | |
| Qualification Inspection | | | | |
| Group II | ±2 | -- | -- | -10 |
| Group III | ±5 | ±(3%+.001 ohm) | - 8 | -10 |
| Group IV | ±5 | ±(2%+.001 ohm) | -10 | -15 |
| Quality Conformance Inspection | | | | |
| Group C | | | | |
| Subgroup I | ±2 | -- | -- | -10 |
| Subgroup II | ±5 | ±(2%+.001 ohm) | -10 | -15 |
| Subgroup III | ±5 | ±(3%+.001 ohm) | - 8 | -10 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. These coils are intended to be mounted by their leads.
4. The polarizing voltage during the moisture-resistance tests is applied with the positive lead connected to the coil terminals tied together, and the negative lead connected to the metal strap.
5. Terminal strength (Pull) test, is not applicable in "Group B" inspection table VI.
6. Solderable/weldable lead wire, number 22 AWG.
7. Barometric pressure test (test condition C) is applicable.
8. Shock, specified pulse, method 213, test condition I, is applicable.
9. Former MS part numbers MS75008-34 thru MS75008-45 have been superseded by MS75101-1 thru MS75101-12, respectively
10. Metric equivalents are in parentheses
11. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence
12. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein

APPROVED 24 Mar 59 REVISED (E) FOR CHANGES SEE PAGES 1 AND 2

| | | | |
|---|---|---|---|
| P A ARMY - ER<br>Other Cust<br>AF-85<br>NAVY - EC | International interest | TITLE<br>COILS, RADIOFREQUENCY, MOLDED, FIXED, SUBMINIATURE (PHENOLIC CORE) TYPES LT4K027 TO LT4K039 INCL | MILITARY STANDARD<br>MS 75008 |
| Procurement Specification<br>MIL-C-15305 | | SUPERSEDES: | PAGE 2 OF 2 |



Source: https://assist.dla.mil -- Downloaded: 20260-23120.262
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

INCH-POUND

MS-75008E
NOTICE 1
11 November 1991

MILITARY STANDARD

# COILS, RADIO FREQUENCY, MOLDED, FIXED SUBMINIATURE, (PHENOLIC CORE) TYPES LT4K027 TO LT4K039, INCL.

Military standard MS-75008E, dated 4 September 1985, remains inactive for new design, however, the document is valid for use in acquisition when needed. For new design, use MIL-C-39010/4.

Custodians:

Army - ER
Navy - EC
Air Force - 85

Review activities:

Army - MI, ME
Air Force - 11, 17

User activities:

Army - AR
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:

Army - ER

Agent:
DLA-ES

AMSC N/A

FSC 5950

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 202610-23T20:26Z
Check the source to verify that this is the current version before use.