INCH-POUND

MS90579B
w/AMENDMENT 1
22 June 2023
SUPERSEDING
MS90579B
5 May 2012


DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, BETWEEN SERIES (SERIES QL SOCKET TO SERIES C SOCKET) JAM NUT MOUNT, TYPE UG-1375/U

Inactive for new design 15 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27434.

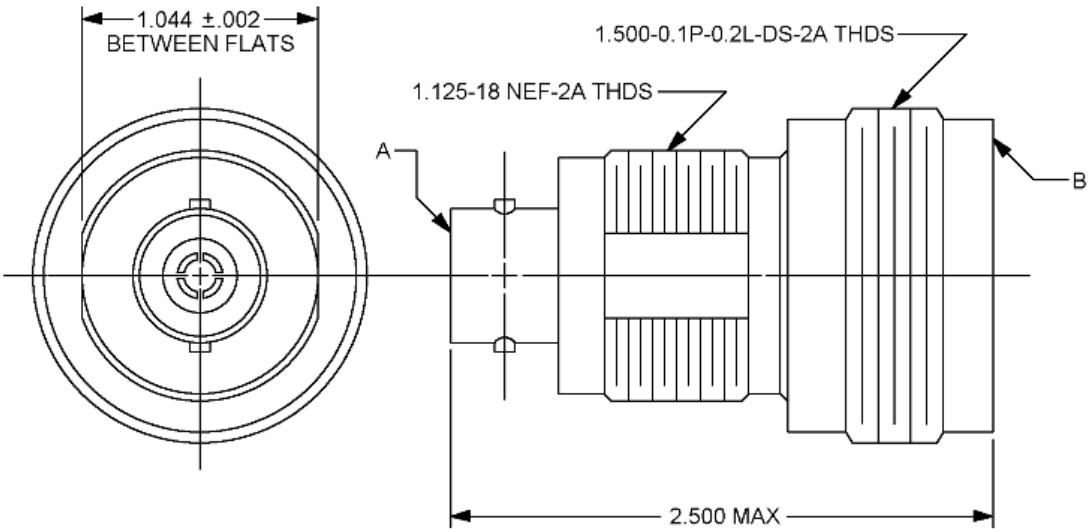

Reference	Series	Contact
A	C	Socket
B	QL	Socket

NOTES:

1. Dimensions are in inches.
2. Series C socket contact and series QL socket contact in accordance with MIL-STD-348.

FIGURE 1. Type UG-1375/U connector.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: In accordance with figure 1 and MIL-STD-348.

Impedance: 50 ohms.

Frequency range: 5 GHz, maximum.

Voltage rating: 1000 volts rms, maximum.

Dielectric withstanding voltage: 3,000 volts, rms.

Corrosion: In accordance with MIL-STD-202-101, test condition B.

Finish:

Center contact. The male pin shall be plated to a minimum gold thickness of 50 micro inches (1.27μm) in accordance with MIL-DTL-45204, type II, grade C, class1, over 50 micro inches (1.27μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, measured anywhere along the mating surface, for all series. The socket contact shall be plated to a minimum of 50 micro inches (1.27 μm) of gold in accordance with MIL-DTL-45204, type II, grade C, class1, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, including the ID, measured at a depth of .040 inch minimum. The plating on non-significant surfaces in the ID shall be of sufficient thickness to ensure plating continuity and uniform utility and protection. This plating may consist of an underplate only. A silver underplate shall not be permitted.

All other parts shall be silver plated to a minimum thickness of 0.0002 inches (0.005 mm) in accordance with ASTM B700.

Part or Identifying Number (PIN): MS90579-1375.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-27434, this document references the following:

MIL-DTL-45204
MIL-STD-202-101
MIL-STD-348
SAE-AMS-QQ-N-290
ASTM B700

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Navy – AS, CG, MC, OS
Air Force - 19

Preparing activity:
DLA - CC

(Project 5935-2023-060)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.