
This standard has been approved by the Bureau (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MS9082(ASG)

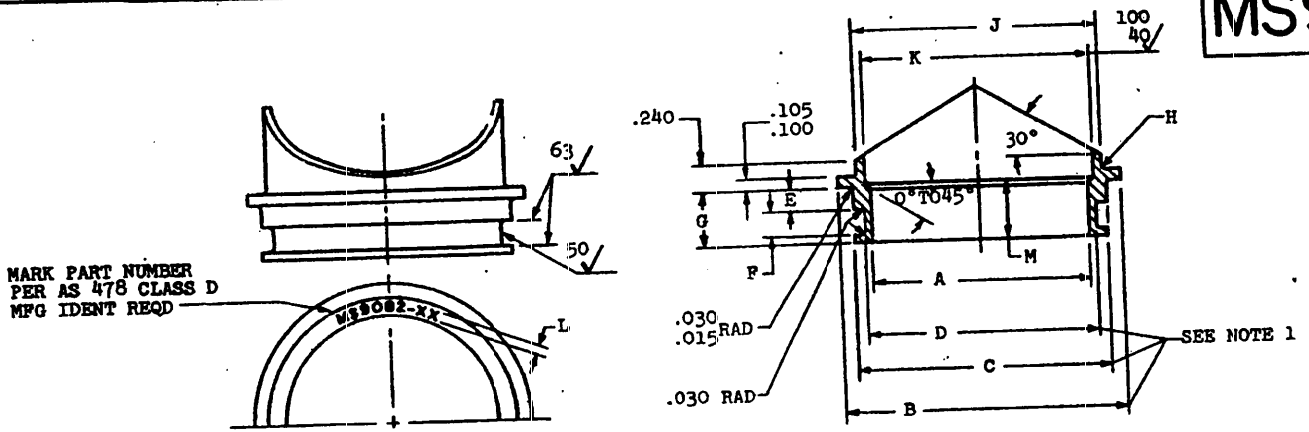

Ⓑ PART NUMBER	TUBE OD NOMINAL	A DIA ±.005	B DIA +.005 -.000	C DIA +.000 -.002	D DIA +.002 -.000	E +.005 -.000	F +.010 -.000	G +.010 -.000	H RAD	J DIA +.000 -.010	K DIA	L	M +.010 -.000	APPROX WEIGHT LBS/EA
MS9082-04	.250	.180	.598	.351	.244	.115	.114	.292	.015-.030	.325	.240- .242	.030-.050	.292	.01
MS9082-05	.312	.242	.660	.413	.306	.115	.114	.292	.015-.030	.387	.302- .304	.030-.050	.292	.02
MS9082-06	.375	.305	.723	.476	.369	.115	.114	.292	.015-.030	.450	.365- .367	.030-.050	.292	.02
MS9082-08	.500	.430	.848	.601	.494	.115	.114	.292	.015-.030	.575	.489- .491	.030-.050	.292	.03
MS9082-10	.625	.555	.973	.726	.619	.115	.114	.292	.015-.030	.700	.614- .616	.030-.050	.292	.03
MS9082-12	.750	.680	1.168	.910	.760	.139	.155	.359	.015-.030	.875	.739- .741	.040-.080	.359	.05
MS9082-14	.875	.777	1.359	1.081	.865	.182	.223	.478	.030-.050	1.000	.864- .866	.060-.110	.478	.08
MS9082-16	1.000	.902	1.484	1.206	.990	.182	.223	.478	.030-.050	1.125	.989- .991	.060-.110	.478	.08
MS9082-18	1.125	1.027	1.609	1.331	1.115	.182	.223	.478	.030-.050	1.250	1.114-1.116	.060-.110	.478	.11
MS9082-20	1.250	1.152	1.734	1.456	1.240	.182	.223	.478	.030-.050	1.375	1.239-1.241	.060-.110	.478	.11
MS9082-24	1.500	1.402	1.984	1.706	1.490	.182	.223	.478	.030-.050	1.625	1.484-1.486	.060-.110	.478	.14
MS9082-28	1.750	1.652	2.238	1.960	1.744	.182	.223	.478	.030-.050	1.875	1.734-1.736	.060-.110	.478	.16
MS9082-32	2.000	1.902	2.488	2.210	1.994	.182	.223	.478	.030-.050	2.125	1.984-1.986	.060-.110	.478	.19
MS9082-40	2.500	2.402	2.988	2.710	2.494	.182	.223	.478	.030-.050	2.625	2.484-2.486	.060-.110	.478	.24
MS9082-48	3.000	2.884	3.493	3.215	2.999	.182	.223	.478	.030-.050	3.156	2.984-2.986	.060-.110	.478	.34
MS9082-56	3.500	3.384	3.993	3.715	3.499	.182	.223	.478	.030-.050	3.656	3.479-3.481	.060-.110	.478	.45
MS9082-64	4.000	3.884	4.493	4.215	3.999	.182	.223	.478	.030-.050	4.156	3.979-3.981	.060-.110	.478	.52

1. DIA D SHALL BE CONCENTRIC WITH DIA C WITHIN .0025 FIR AND DIA B SHALL BE CONCENTRIC WITH DIA C WITHIN .005 FIR
2. MATERIAL: CORROSION RESISTANT STEEL AMS 5645.
3. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED; SURFACES TO BE 125 MICROINCHES.
4. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°
6. DO NOT USE UNASSIGNED PART NUMBERS.
Ⓑ 7. MS9082-4, -5, -6, AND -8 WERE RENUMBERED TO MS9082-04, -05, -06, AND -08.

APPROVED 7 Mar. 58 REVISED Ⓐ 31 Jul 61 Ⓑ 6 Mar 63

FED. SUP CLASS 4730

PROCUREMENT SPECIFICATION: NONE

SUPERSEDES:

P.A. USAF - AFSC
Other Cust
Navy - Nap

Ⓑ AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

TITLE
SLEEVE, SWIVEL-PILOTED O-RING, TUBE CONNECTION, BRAZING, AMS 5645

MILITARY STANDARD
MS9082 (ASG)
SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:10Z
Check the source to verify that this is the current version before use.