
MS9495

FED. SUP CLASS 5306

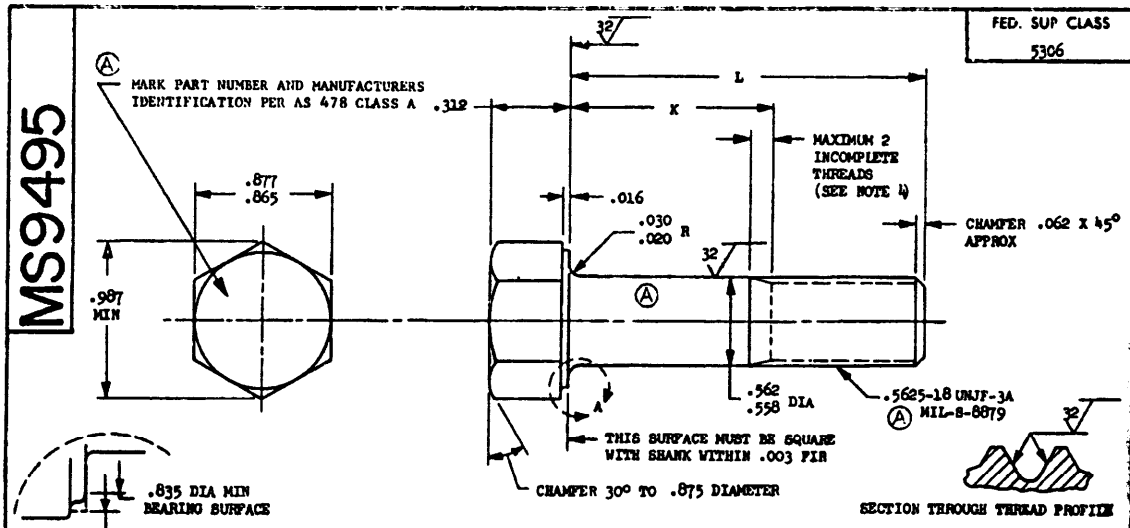

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9495-04	.875	.113-.133	11.44
MS9495-05	.938	.113-.133	11.88
MS9495-06	1.000	.113-.133	12.32
MS9495-07	1.062	.113-.133	12.76
MS9495-08	1.125	.113-.133	13.20
MS9495-09	1.188	.113-.133	13.64
MS9495-10	1.250	.113-.133	14.08
MS9495-11	1.312	.113-.133	14.52
MS9495-12	1.375	.113-.133	14.97
MS9495-13	1.438	.113-.133	15.41
MS9495-14	1.500	.113-.133	15.85
MS9495-15	1.562	.128-.188	16.29
MS9495-16	1.625	.190-.250	16.63
MS9495-17	1.688	.252-.312	17.17
MS9495-18	1.750	.315-.375	17.61
MS9495-19	1.812	.378-.438	18.05
MS9495-20	1.875	.440-.500	18.49
MS9495-21	2.000	.565-.625	19.37
MS9495-22	2.125	.690-.750	20.25
MS9495-23	2.250	.815-.875	21.13
MS9495-24	2.375	.940-1.000	22.01
MS9495-25	2.500	1.065-1.125	22.89
MS9495-26	2.625	1.190-1.250	23.77
MS9495-27	2.750	1.315-1.375	24.65
MS9495-28	2.875	1.440-1.500	25.53
MS9495-29	3.000	1.565-1.625	26.41
MS9495-30	3.125	1.690-1.750	27.29

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9495-31	3.250	1.815-1.875	28.17
MS9495-32	3.375	1.940-2.000	29.05
MS9495-33	3.500	2.065-2.125	29.93
MS9495-34	3.625	2.190-2.250	30.81
MS9495-35	3.750	2.315-2.375	31.70
MS9495-36	3.875	2.440-2.500	32.58
MS9495-37	4.000	2.565-2.625	33.46
MS9495-38	4.125	2.690-2.750	34.34
MS9495-39	4.250	2.815-2.875	35.22
MS9495-40	4.375	2.940-3.000	36.10
MS9495-41	4.500	3.065-3.125	36.98
MS9495-42	4.625	3.190-3.250	37.86
MS9495-43	4.750	3.315-3.375	38.74
MS9495-44	4.875	3.440-3.500	39.62
MS9495-45	5.000	3.565-3.625	40.50
MS9495-46	5.125	3.690-3.750	41.38
MS9495-47	5.250	3.815-3.875	42.26
MS9495-48	5.375	3.940-4.000	43.14
MS9495-49	5.500	4.065-4.125	44.02
MS9495-50	5.625	4.190-4.250	44.90
MS9495-51	5.750	4.315-4.375	45.78
MS9495-52	5.875	4.440-4.500	46.66
MS9495-53	6.000	4.565-4.625	47.54
MS9495-54	1.938	.502-.562	18.93

Ⓐ

Ⓐ 1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .026 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731.
6. MANUFACTURING SPECIFICATION: AMS 7477.
7. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
Ⓐ 8. SURFACE TEXTURE: USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON.
9. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
11. DO NOT USE UNASSIGNED PART NUMBERS.

Ⓐ AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
Ⓐ THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 5 May 1965 REVISED Ⓐ 17 Nov 69

User activities:

Review activities:
Army - MI, MI
USAF - 82, 85

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 11 Other Cust Army - AV USAF - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE Ⓐ BOLT, MACHINE - HEXAGON HEAD, FULL SHANK, AMS 5731, .5625-18 UNJF-3A	MILITARY STANDARD MS9495
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-093/S-3735

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.