
MS9744 (ASG)

FED SUP CLASS 5306

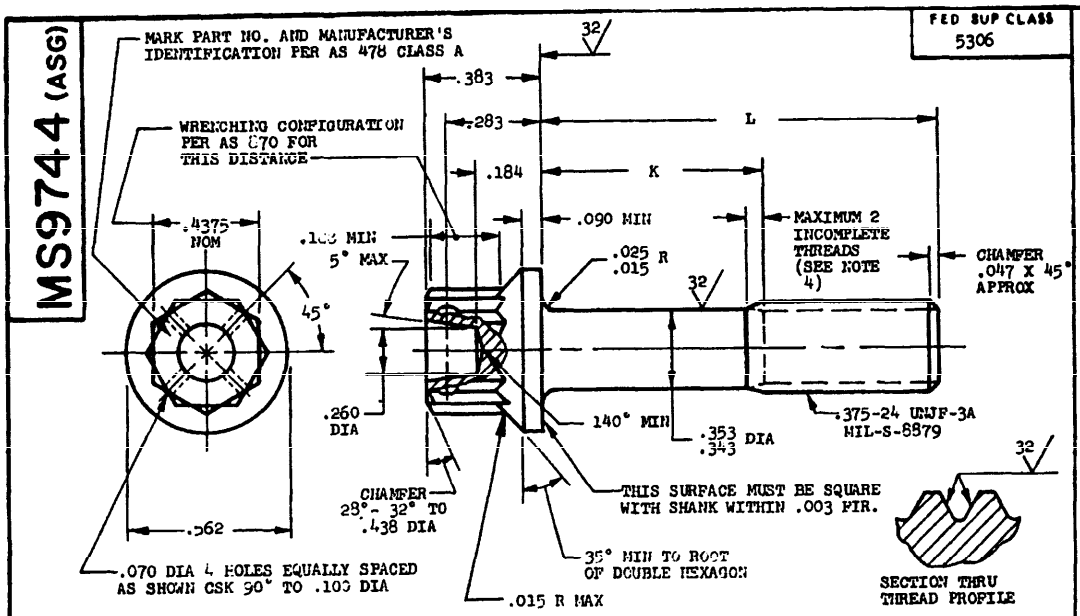

PART NO.	L	K	APPROX WEIGHT LB/100
MS9744-04	.625	.085-.105	3.44
MS9744-05	.688	.085-.105	3.61
MS9744-06	.750	.085-.105	3.77
MS9744-07	.812	.085-.105	3.94
MS9744-08	.875	.085-.105	4.10
MS9744-09	.935	.085-.105	4.27
MS9744-10	1.000	.085-.105	4.44
MS9744-11	1.062	.085-.105	4.60
MS9744-12	1.125	.085-.125	4.77
MS9744-13	1.188	.125-.185	4.94
MS9744-14	1.250	.190-.250	5.10
MS9744-15	1.312	.252-.312	5.27
MS9744-16	1.375	.315-.375	5.43
MS9744-17	1.438	.378-.438	5.60
MS9744-18	1.500	.440-.500	5.76
MS9744-19	1.562	.502-.562	5.93
MS9744-20	1.625	.565-.625	6.10
MS9744-21	1.688	.628-.688	6.26

PART NO.	L	K	APPROX WEIGHT LB/100
MS9744-22	1.750	.690- .750	6.43
MS9744-23	1.812	.752- .812	6.60
MS9744-24	1.875	.815- .875	6.76
MS9744-25	2.000	.940-1.000	7.09
MS9744-26	2.125	1.065-1.125	7.42
MS9744-27	2.250	1.190-1.250	7.75
MS9744-28	2.375	1.315-1.375	8.09
MS9744-29	2.500	1.440-1.500	8.42
MS9744-30	2.625	1.565-1.625	8.75
MS9744-31	2.750	1.690-1.750	9.08
MS9744-32	2.875	1.815-1.875	9.42
MS9744-33	3.000	1.940-2.000	9.75
MS9744-34	3.125	2.065-2.125	10.08
MS9744-35	3.250	2.190-2.250	10.41
MS9744-36	3.375	2.315-2.375	10.74
MS9744-37	3.500	2.440-2.500	11.08
MS9744-38	3.625	2.565-2.625	11.41
MS9744-39	3.750	2.690-2.750	11.7[illegible]

PART NO	L	K	APPROX WEIGHT LB/100
MS9744-40	3.875	2.815-2.875	12.07
MS9744-41	4.000	2.940-3.000	12.40
MS9744-42	4.125	3.065-3.125	12.74
MS9744-43	4.250	3.190-3.250	13.07
MS9744-44	4.375	3.315-3.375	13.40
MS9744-45	4.500	3.440-3.500	13.73
MS9744-46	4.625	3.565-3.625	14.06
MS9744-47	4.750	3.690-3.750	14.40
MS9744-48	4.875	3.815-3.875	14.73
MS9744-49	5.000	3.940-4.000	15.06
MS9744-50	5.125	4.065-4.125	15.39
MS9744-51	5.250	4.190-4.250	15.72
MS9744-52	5.375	4.315-4.375	16.06
MS9744-53	5.500	4.440-4.500	16.39
MS9744-54	5.625	4.565-4.625	16.72
MS9744-55	5.750	4.690-4.750	17.05
MS9744-56	5.875	4.815-4.875	17.38
MS9744-57	6.000	4.940-5.000	17.72

1. SHANK SHALL BE STRAIGHT WITHIN .0025 PER INCH OF BOLT LENGTH.
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .009 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CRES AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 3 Mar 67 REVISED

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF - 82, 85

P.A. USAF - 11 Other Cust Navy - AS	TITLE BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED PD SHANK, CRES AMS 5643, .375-24 UNJF-3A	MILITARY STANDARD MS9744 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2176-F053

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-518/A-1351

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.