
MS9965

FED. SUP CLASS
5306

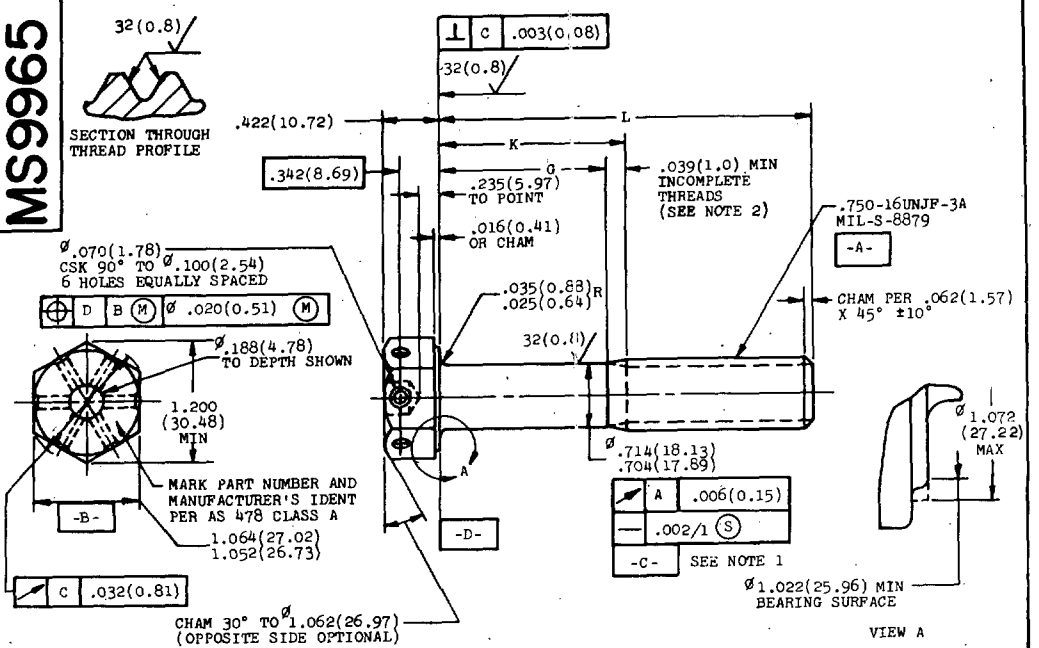

1. FOR PART NUMBERS MS9965-04 THRU MS9965-26 THE THREAD PD SHALL REPLACE DATUM C
2. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. MATERIAL: STEEL AMS 6322.
4. HARDNESS: ROCKWELL C26-32.
5. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
6. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
9. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES (3.2 MICROMETERS) EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. METRIC CONVERSIONS ARE IN PARENTHESES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010 (0.25), ANGULAR DIMENSIONS ±5°. INTERNATIONAL SYSTEM UNITS (SI) SHOWN ARE FOR REFERENCE ONLY.
12. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966; Ø = DIAMETER.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 27 Jun 74. REVISED

User activities: Army, Navy, Air Force, DLA

Review activities: Army, Navy, Air Force, DLA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force – 11 Other Cust Army – AV Navy – AS	TITLE BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .750-16UNJF-3A	MILITARY STANDARD MS9965
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

5306-0500

DD FORM 672-1
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.

MS9965

FED. SUP CLASS
5306

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9965-04	1.125	28.58	.035	0.89	.149	3.78	23.70	10.750
MS9965-05	1.188	30.18	.035	0.89	.149	3.78	24.39	11.063
MS9965-06	1.250	31.75	.035	0.89	.149	3.78	25.08	11.376
MS9965-07	1.312	33.32	.035	0.89	.149	3.78	25.77	11.689
MS9965-08	1.375	34.92	.035	0.89	.149	3.78	26.46	12.002
MS9965-09	1.437	36.52	.035	0.89	.149	3.78	27.15	12.315
MS9965-10	1.500	38.10	.035	0.89	.149	3.78	27.84	12.628
MS9965-11	1.562	39.67	.035	0.89	.149	3.78	28.53	12.941
MS9965-12	1.625	41.28	.035	0.89	.149	3.78	29.23	13.258
MS9965-13	1.688	42.88	.035	0.89	.149	3.78	29.92	13.571
MS9965-14	1.750	44.45	.035	0.89	.149	3.78	30.62	13.889
MS9965-15	1.812	46.02	.035	0.89	.149	3.78	31.31	14.202
MS9965-16	1.875	47.62	.035	0.89	.149	3.78	32.01	14.519
MS9965-17	1.938	49.22	.035	0.89	.188	4.77	32.70	14.832
MS9965-18	2.000	50.80	.065	1.66	.250	6.35	33.40	15.150
MS9965-19	2.125	53.98	.190	4.83	.375	9.52	34.79	15.780
MS9965-20	2.250	57.15	.315	8.01	.500	12.70	36.18	16.411
MS9965-21	2.375	60.32	.440	11.18	.625	15.88	37.57	17.041
MS9965-22	2.500	63.50	.565	14.36	.750	19.05	38.96	17.672
MS9965-23	2.625	66.68	.690	17.53	.875	22.22	40.35	18.302
MS9965-24	2.750	69.85	.815	20.71	1.000	25.40	41.74	18.933
MS9965-25	2.875	73.02	.940	23.88	1.125	28.57	43.13	19.563

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9965-26	3.000	76.20	1.065	27.06	1.250	31.75	44.52	20.194
MS9965-27	3.125	79.38	1.190	30.23	1.375	34.92	45.91	20.824
MS9965-28	3.250	82.55	1.315	33.41	1.500	38.10	47.31	21.459
MS9965-29	3.375	85.72	1.440	36.58	1.625	41.27	48.70	22.090
MS9965-30	3.500	88.90	1.565	39.76	1.750	44.45	50.09	22.720
MS9965-31	3.625	92.02	1.690	42.93	1.875	47.62	51.48	23.351
MS9965-32	3.750	95.25	1.815	46.11	2.000	50.80	52.87	23.981
MS9965-33	3.875	98.42	1.940	49.28	2.125	53.97	54.26	24.612
MS9965-34	4.000	101.60	2.065	52.46	2.250	57.15	55.65	25.242
MS9965-35	4.125	104.78	2.190	55.63	2.375	60.32	57.04	25.873
MS9965-36	4.250	107.95	2.315	58.81	2.500	63.50	58.43	26.503
MS9965-37	4.375	111.12	2.440	61.98	2.625	66.67	59.82	27.134
MS9965-38	4.500	114.30	2.565	65.16	2.750	69.85	61.21	27.764
MS9965-39	4.625	117.48	2.690	68.33	2.875	73.02	62.60	28.395
MS9965-40	4.750	120.65	2.815	71.51	3.000	76.20	63.99	29.025
MS9965-41	4.875	123.82	2.940	74.68	3.125	79.37	65.38	29.656
MS9965-42	5.000	127.00	3.065	77.86	3.250	82.55	66.77	30.286
MS9965-43	5.125	130.18	3.190	81.03	3.375	85.72	68.17	30.921
MS9965-44	5.250	133.35	3.315	84.21	3.500	88.90	69.56	31.552
MS9965-45	5.375	136.52	3.440	87.38	3.625	92.07	70.98	32.196
MS9965-46	5.500	139.70	3.565	90.56	3.750	95.25	72.34	32.813
MS9965-47	5.625	142.88	3.690	93.73	3.875	98.42	73.73	33.443
MS9965-48	5.750	146.05	3.815	96.91	4.000	101.60	75.12	34.074
MS9965-49	5.875	149.22	3.940	100.08	4.125	104.77	76.51	34.704
MS9965-50	6.000	152.40	4.065	103.26	4.250	107.95	77.90	35.335

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Air Force
Army
Navy
DSA

User activities:
Army
Navy
Air Force
DSA

APPROVED 27 Jun 74 REVISED

P.A. Air Force – 11
Other Cust
Army – AV
Navy – AS

PROCUREMENT SPECIFICATION

TITLE
BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .750-16UNJF-3A

SUPERSEDES:

MILITARY STANDARD
MS9965
SHEET 2 OF 2

DD FORM 1 SEP 67 672-1
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5306-0500

☆U.S. GOVERNMENT PRINTING OFFICE: 1974—603-109/1183

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.