METRIC


DOD-W-70336/3
8 January 1988

MILITARY SPECIFICATION SHEET

WASHER, LOCK, FLAT, INTERNAL TOOTH (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the washers described herein shall consist of this document and the latest issue of DOD-W-70336.

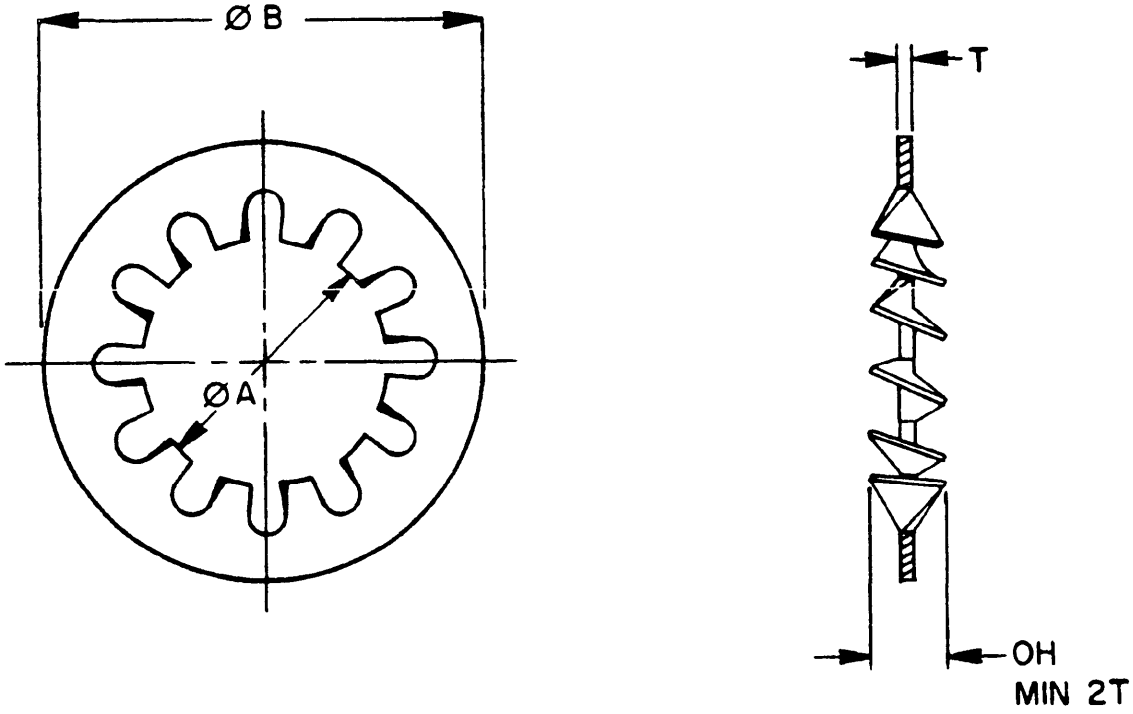

NOTE:

1. All dimensions are in millimeters, see Table I for dash numbers and dimensions.

FIGURE 1. WASHER, LOCK, FLAT, INTERNAL TOOTH (METRIC).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


1. Material. Carbon steel, 1050 thru 1064 (UNS G10500 thru UNS G10640), in accordance with ASTM A510M phosphor bronze, (UNS C51000), temper H04 in accordance with ASTM B139M, and austenitic corrosion resistant steel (CRES) 300 Series, non-magnetic in accordance with QQ-S-763. Series, non-magnetic in accordance with QQ-S-763.

2. Surface hardness. Carbon Steel washers shall have a hardness of 40-50 HRC. Phosphor bronze washers shall have a hardness of 85-95 HRB. Austenitic corrosion resistant steel washers shall be 35-43 HRC.

3. Protective coating and surface teratment. Carbon steel washers shall be cadmium plated (Code P) in accordance with QQ-P-416, Type II, Class 2. Phosphor bronze washers shall be tin plated (Code T) in accordance with MIL-T-10727, Type I. Carbon steel and phosphor bronze washers may be plain (no code), with a light film of oil or rust inhibitor. CRES washers shall be passivated (Code P) in accordance with ASTM A380, or black oxide coated (Code B) in accordance with MIL-C-13924.

4. Part number. The part number consists of the letter "D" the basic number of this specification sheet, the finish code letter, and a dash number taken from Table I.

EXAMPLE: D70336/3-C01

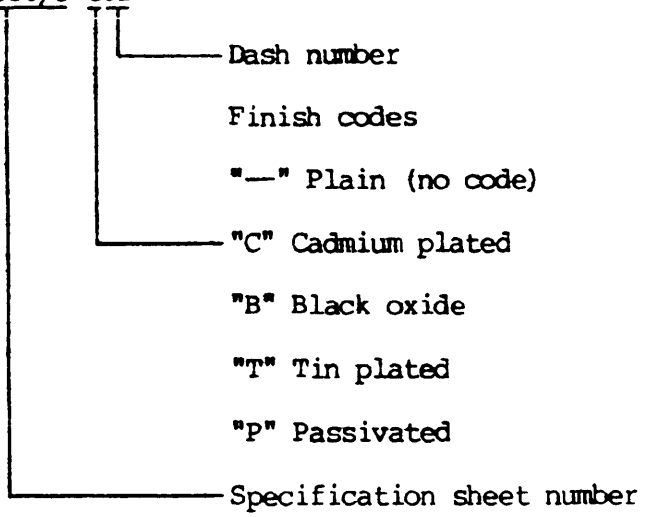

D70336/3-C01 Indicates - Washer, Lock, Flat, Internal Tooth; Spring Steel; Cadmium Plated; 1.7 mm ID; 3.6 mm OD; 0.3 mm thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND CHARACTERISTICS.

NOM SIZE	DASH NO.			ØA ID		ØB OD		THICKNESS T		FREE HEIGHT OH (REFERENCE) (2T, MIN)	NO. OF TEETH (MIN)
	CARBON STEEL	PHOSPHOR BRONZE	CRES		TOL		TOL		TOL		
1.6	01	21	41	1.7		3.6		0.3		0.6	6
1.8	02	22	42	1.8		3.9	0	0.3	±.02	0.6	6
2	03	23	43	2.2	+0.08	4.5	-0.08	0.3		0.6	6
2.5	04	24	44	2.7	0	5.5		0.4	±.03	0.8	6
3	05	25	45	3.2		6	0	0.4		0.8	6
3.5	06	26	46	3.7		7	-0.12	0.5		1	6
4	07	27	47	4.3		8		0.5	±.04	1	8
5	08	28	48	5.3	+0.12	10	0	0.6		1.2	8
6	09	29	49	6.4	0	11	-0.15	0.7	±.05	1.4	8
8	10	30	50	8.4	+0.15	15	0	0.8		1.6	8
10	11	31	51	10.5	0	18	-0.18	0.9		1.8	9
12	12	32	52	12.5		20.5		1	±.06	2	10
14	13	33	53	14.5	+0.18	24		1		2	10
16	14	34	54	16.5	0	26	0	1.2		2.4	12
18	15	35	55	19		30	-0.21	1.4	±.08	2.8	12
20	16	36	56	21	+0.21	33		1.4		2.8	12
					0						

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T03:23Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review Activities:
Army - AV, EA, MI
Navy - SH
Air Force - 82
DLA - IS
NSA - NS

User Activities:
Army - AT, CR, ER, ME
Navy - MC

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1550)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army ARDEC
ATTN: SMCAR-ESC-S
Picatinny Arsenal, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-W-70336/3	WASHER, LOCK, FLAT INTERNAL TOOTH (METRIC)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T03:23Z
Check the source to verify that this is the current version before use.