MILITARY SPECIFICATION SHEET

FITTINGS, WIRE REINFORCED HYDRAULIC HOSE AND CLAMP-HALVES: FIELD ATTACHABLE (REUSABLE), SCREW-ON TO 4-BOLT SPLIT-FLANGE, 90° BENT TUBE, FOR USE WITH TYPE 100R12 FOUR-SPIRAL-WRAP REINFORCEMENT HOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fittings described herein shall consist of this specification and the latest issue of specification MIL-F-52525.

REQUIREMENTS:

1. The fittings shall conform to figure 1 and table I.

FSC 4730

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:24Z
Check the source to verify that this is the currentversion before use.

TABLE I. Dimensions for type 10012 fittings, 90° bent tube.

Specification part number	Hose dash number	Hose I.D.		Hose O.D.		Tube dash number	Tube O.D.		Flange dash size
		inch	mm	inch	mm		inch	mm	
M52525/42-08-08	08	.50	12.7	.94	23.88	08	.50	12.7	08
M52525/42-12-12	12	.75	19.05	1.21	30.73	12	.75	19.05	12
M52525/42-16-16	16	1.00	25.4	1.50	38.1	16	1.00	25.4	16

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:24Z
Check the source to verify that this is the current version before use.

4. Marking shall include the manufacturer's name or

TABLE I. Dimensions for type 10012 fittings, 90° bent tube. - Continued

Specification part number	Hose dash number	A		B		C		D	
		Maximum		Maximum		Maximum		Minimum	
		inch	mm	inch	mm	inch	mm	inch	mm
M52525/42-08-08	08	3.60	91.44	1.65	41.91	1.29	32.77	.35	8.89
M52525/42-12-12	12	4.50	114.3	2.25	57.15	1.73	43.94	.56	14.22
M52525/42-16-16	16	5.50	139.7	2.50	63.5	2.02	51.31	.75	19.05

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:24Z
Check the source to verify that this is the current version before use.

2. The maximum working pressures shall be as specified in Table II.

TABLE II. Maximum working pressures of fittings.

Hose I.D. (REF) (inch)	Pounds per square inch (PSI)	Megapascals (MPa)
.50	5000	34.47
.75	4000	27.58
1.00	4000	27.58


3. Marking shall include the manufacturer's name or trademark, size, and hose identifier 100R12. Location of marking is optional.

4. This item must be listed on QPL-52525.

INTENDED USE: Type 100R12 fittings are for use with four-spiral-wrap reinforced hose conforming to MIL-H-52471, type 100R12.

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size fitting covered by this specification sheet. The military specification number, the military specification sheet number, code number for size of hose, and code number for size of tube are combined to form the military specification part number.

EXAMPLE: Military specification part number

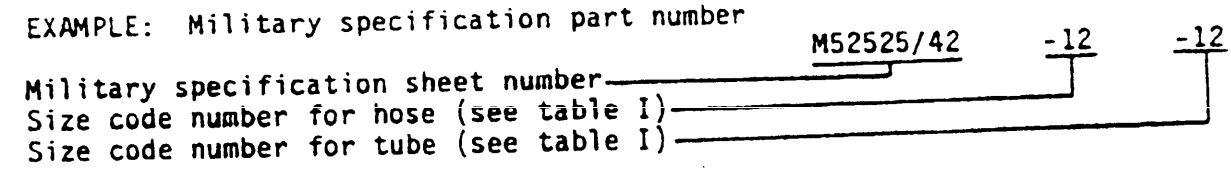

The approved item name of this item, in accordance with the Federal Item Name Directory for the Federal Catalog System, Handbook H6, Section A, is Elbow.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:24Z
Check the source to verify that this is the current version before use.

Custodian:
Army - ME

Review activities:
Army - GL
DLA - CS


User activities:

Navy - SH
Air Force - 99

Preparing activity:
Army - ME

Project 4730-0996

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:24Z
Check the source to verify that this is the current version before use.

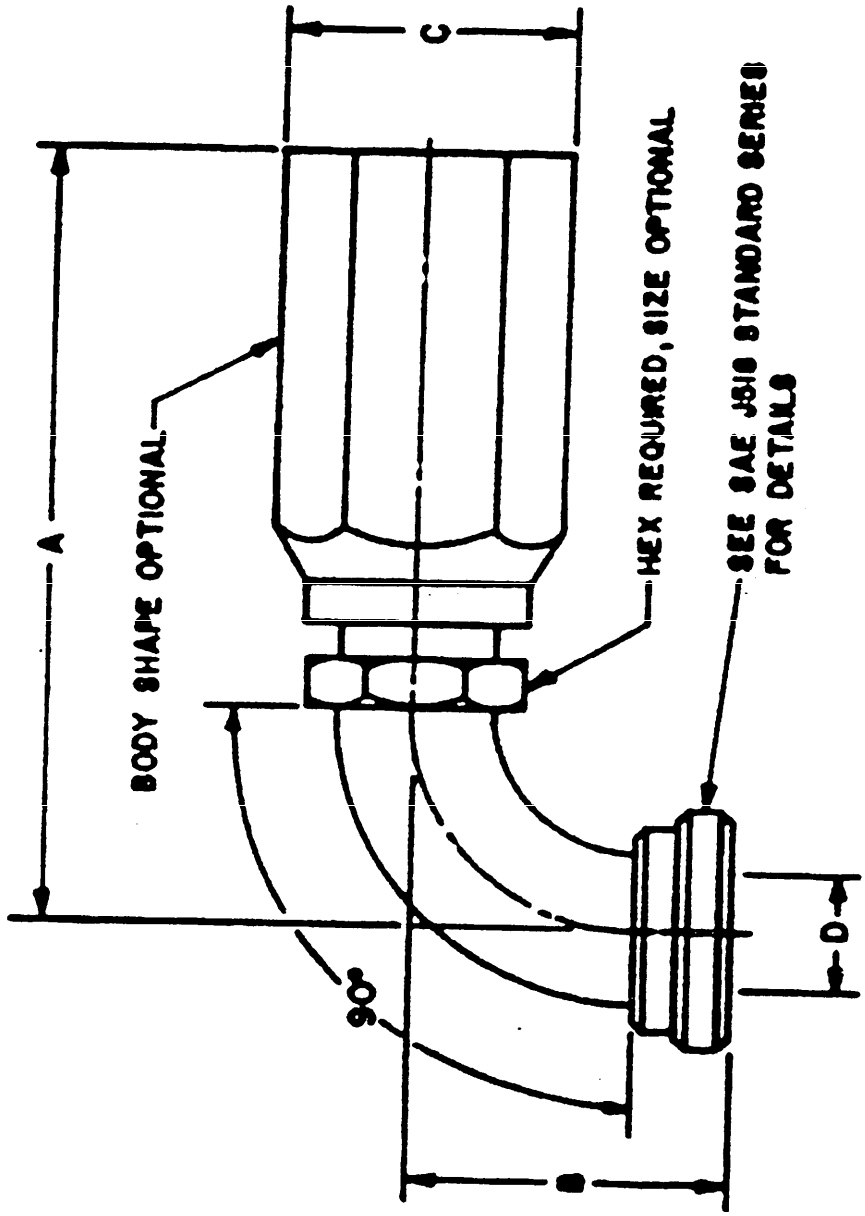

X-4307

FIGURE 1. Fitting, screw-on to 4 bolt split flange, 90° bent tube, for type RE hose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:24Z
Check the source to verify that this is the current version before use.