INCH-POUND

MIL-DTL-55446C
21 November 2006
SUPERSEDING
MIL-DTL-55446B
27 October 2000

DETAIL SPECIFICATION

CABLES, TELEPHONE, SWITCHBOARD: PLASTIC INSULATED, PLASTIC JACKETED

Inactive for new design after 16 June 1997

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers plastic insulated, plastic jacketed, telephone switchboard cables consisting of number 22 AWG conductors in combinations of pairs and singles ranging from 4 pairs to 201 pairs (see 1.2).

1.2 Classification. The types of switchboard cables (see 6.2) covered by this specification are listed in table I.

TABLE I. Switchboard cable types.

Number of pairs and singles (No.22 AWG)	Total number of conductors	Maximum average overall diameter of finished cables inches (mm) 1/
4 pairs	8	.360 (9.14)
5 pairs, 5 singles	15	.440 (11.18)
6 pairs	12	.390 (9.91)
8 pairs, 8 singles	24	.480 (12.19)
10 pairs, 10 singles	30	.540 (13.72)
11 pairs	22	.470 (11.94)
16 pairs	32	.530 (13.46)
20 pairs	40	.560 (14.22)
20 pairs, 10 singles	50	.610 (15.49)
20 pairs, 20 singles	60	.660 (16.76)
25 pairs	50	.610 (15.49)
26 pairs, 26 singles	78	.720 (18.29)
30 pairs	60	.640 (16.26)
40 pairs	80	.720 (18.29)
41 pairs, 41 singles	123	.830 (21.08)
51 pairs	102	.800 (20.32)
76 pairs	152	.910 (23.11)
101 pairs	202	1.030 (26.16)
101 pairs, 100 singles	302	1.250 (31.75)
201 pairs	402	1.410 (35.81)

1/ Dimensions are in inches. Metric equivalents are given for information only.

Comments, suggestions, ore questions on this document should be addressed to Defense Supply Center Columbus, ATTN: DSCC-VAI, P.O. Box 3990, Columbus, Ohio 43218-3990, or email to WireCable@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

FEDERAL STANDARD

FED-STD-228 - Cable and Wire, Insulated; Methods of Testing

COMMERCIAL ITEM DESCRIPTION

A-A-59551 - Wire, Electrical, Copper (Uninsulated)

DEPARTMENT OF DEFENSE STANDARD

MIL-STD-104 - Limits For Electrical Insulation Colors

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

NATIONAL CONFERENCE OF STANDARDS LABORATORIES (NCSL)

NCSL-Z540.1 - Calibration Laboratories and Measuring and Test Equipment, General Requirements.

(Copies of this document are available from http://www.ncsli.org or from the National Conference of Standards Laboratories (NCSL), 2995 Wilderness Place, Suite 107, Boulder, CO 80381-5404.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The cables covered by this specification are switchboard cables, the conductors of which are No. 22 AWG solid copper wire, tinned and individually insulated with an extruded polyvinyl chloride (PVC) covering. The insulation is color coded for convenient identification of pairs and single wires. The core is made up of pairs and single wires as required and cabled either concentrically in layers or in unit construction, depending on its size. The individual units of unit-constructed cables are bound with color coded spaced servings of yarn or polyethylene tape binders. The core is covered with an overlapped spiral winding of paper or, at the option of the manufacturer, polyester tape. Over this polyester covering and beneath the outer sheath is a nylon ripcord to facilitate stripping. The outer sheath is an extruded PVC jacket.

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life-cycle costs.

3.3 Construction. The cable shall be made up of the number of pairs and single wires as required (see 1.2). The pairs shall be twisted, with the maximum length of pair twist not to exceed 6 inches (152.40 mm). To minimize cross talk, each pair in a concentric type cable or each pair in a unit (for unit construction) shall have a twist with a length of lay different from that of any other pair in the cable or unit, respectively.

3.4. Materials. The materials for the cables covered by this specification shall be as specified herein. When a definite material is not specified, the best material commercially available for the purpose intended shall be used.

3.5 Conductors. Each conductor of the cables shall be No. 22 AWG solid, soft, or drawn and annealed tinned copper wire conforming to A-A-59551.

3.5.1 Joints in conductors. If joints are necessary, the joints shall be made by brazing with silver solder or by welding. The diameter of the wire measured at the joint shall be within the maximum diameter tolerance for the conductors (see 3.7.2). The conductor surface at the joint shall be smooth and free from lumps and sharp projections. The tensile strength of a section of the conductor containing a joint shall be not less than 90 percent of the tensile strength of an adjacent section of the conductor of equal length that is free from joints. The resistance of a section of the conductor not exceeding 6 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

(152.40 mm) in length, which includes the joint, shall be not more than 105 percent of the resistance of an adjacent section of equal length that is free from joints.

3.6 Insulation. Each conductor of the cable shall be insulated with an extruded layer of semi-rigid PVC, conforming to a medium-low temperature polyvinylchloride (PVC) and polyvinylchloride acetate type IP compound.

3.6.1 Insulation thickness. The extruded layer of insulating compound applied to each conductor shall be not less than .008 inch (.203 mm) thick.

3.6.2 Diameter of insulated conductor. The diameter of the insulated conductor shall be not more than .048 inch (1.22 mm).

3.6.3 Color code. The insulated conductors shall be color coded to allow identification of pairs and single conductors. The color code shall be specified in table II for pairs and in table III for singles.

3.6.3.1 Insulation color. The insulation color, including stripe colors, shall be within the limits specified in MIL-STD-104. The base color shall be integral. The color striping shall be either integral or applied to the insulation by any commercially accepted standard method, provided the colors are readily distinguishable on the insulation after the cable has been subjected to the tests of the specification, except for the flame retardation tests. The colors shall be durable and shall not abrade as a result of cable handling or abrasion.

TABLE II. Color code for pairs.

Pair No.	Wire		Mate	
	Wide stripe (base color)	Narrow stripe	Narrow stripe	Wide strip (base color)
P 1	Blue	White	Blue	White
P 2	Orange	White	Orange	White
P-3	Green	White	Green	White
P 4	Brown	White	Brown	White
P 5	Slate	White	Slate	White
P 6	Blue	Red	Blue	Red
P 7	Orange	Red	Orange	Red
P 8	Green	Red	Green	Red
P 9	Brown	Red	Brown	Red
P 10	Slate	Red	Slate	Red
P 11	Blue	Black	Blue	Black
P 12	Orange	Black	Orange	Black
P 13	Green	Black	Green	Black
P 14	Brown	Black	Brown	Black
P 15	Slate	Black	Slate	Black
P 16	Blue	Yellow	Blue	Yellow
P 17	Orange	Yellow	Orange	Yellow
P 18	Green	Yellow	Green	Yellow
P 19	Brown	Yellow	Brown	Yellow
P 20	Slate	Yellow	Slate	Yellow
Spare pair: SP 1	White		Red	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

TABLE III. Color code for singles.

Single No.	Color coding 1/		
	Base color	Stripe (wide)	Stripe (narrow)
S 1	Blue	-	-
S 2	Orange	-	-
S 3	Green	-	-
S 4	Brown	-	-
S 5	Slate	-	-
S 6	Blue	Red	White
S 7	Orange	Red	White
S 8	Green	Red	White
S 9	Brown	Red	White
S 10	Slate	Red	White
S 11	Blue	Black	White
S 12	Orange	Black	White
S 13	Green	Black	White
S 14	Brown	Black	White
S 15	Slate	Black	White
S 16	Blue	Yellow	White
S 17	Orange	Yellow	White
S 18	Green	Yellow	White
S 19	Brown	Yellow	White
S 20	Slate	Yellow	White
Spare single: SS 1	Red	White	-

1/ Approximate equal widths for both stripes is an acceptable alternative to wide and narrow stripe specified.

3.6.3.2 Color stripe length of lay. The color stripe length of lay shall not exceed 1 inch (25.4 mm).

3.7 Cabling. The required number of pairs and single conductors shall be cabled in layers as a concentric-type construction or in units as a unit-type construction, as shown on figure 1 through figure 6.

3.7.1 Binders. Each individual unit of unit-constructed cables shall be spirally bound with a color coded binder of nylon yarn servings or polypropylene or polyethylene tape. The color code of the binders shall conform to the binder colors specified in the applicable cable configuration on figures 2 through 6.

3.7.2 Core wrapping. The core shall be wrapped with an overlapping spirally applied Kraft electrical grade paper tape having a .005 inch nominal thickness, or with a polyester tape having a .002 inch (.0508 mm) nominal thickness. If a core binder polyethylene or polypropylene tape is used (similar to unit binders in 3.7.1), the core wrapping may be omitted.

3.8 Ripcord. A ripcord of double-ply nylon yarn shall be laid over the wrapped cable core directly beneath the cable jacket.

3.9 Jacket. The outer covering shall be a slate-colored plasticized PVC or its copolymer with polyvinyl acetate type JP. The jacketing compound shall be a medium-low temperature PVC and polyvinylchloride-acetate (PVCA). The jacket shall be suitably stabilized, compounded, and extruded to provide the cable with a tough, flexible, long-life protective covering. The wall thickness of the plastic jacket shall be .030 inch (.762 mm) minimum for core diameters less than 1 inch (25.4 mm), and .040 inch (1.02 mm) minimum for core diameters 1 inch and over.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

3.9.1 Diameter of finished cables. The outside diameter of the finished cable shall be in accordance with the applicable cable and diameter specified in table I.

3.10 Electrical requirements.

3.10.1 Continuity. Each conductor in each cable shall be continuous.

3.10.2 Short circuit. Each conductor shall be free of any contact with any other conductor.

3.10.3 Resistance. The dc resistance of each conductor shall not exceed 94Ω per mile of cable at 20°C.

3.10.4 Dielectric strength. The insulation of each conductor shall be capable of withstanding an ac potential of 1,500 volts for one minute.

3.10.5 Insulation resistance. The insulation resistance between each conductor and the remaining conductors connected together shall be not less than 4,000 megohms per 1,000 feet (305 m) at 20 °C.

3.11 Physical requirements for insulation.

3.11.1 Tensile strength. The insulation shall have a tensile strength of 2,500 psi.

3.11.2 Elongation. The insulation shall have an elongation of 100 percent minimum.

3.11.3 Adhesion. The maximum pull required to remove a 1.250 inch (31.8 mm) length of insulation shall be 3 pounds.

3.11.4 Shrinkage. The maximum allowable insulation shrinkback on the conductor shall not exceed .0625 inch (1.59 mm) when the conductor is exposed to solder at a temperature of 160 °C for 20 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.



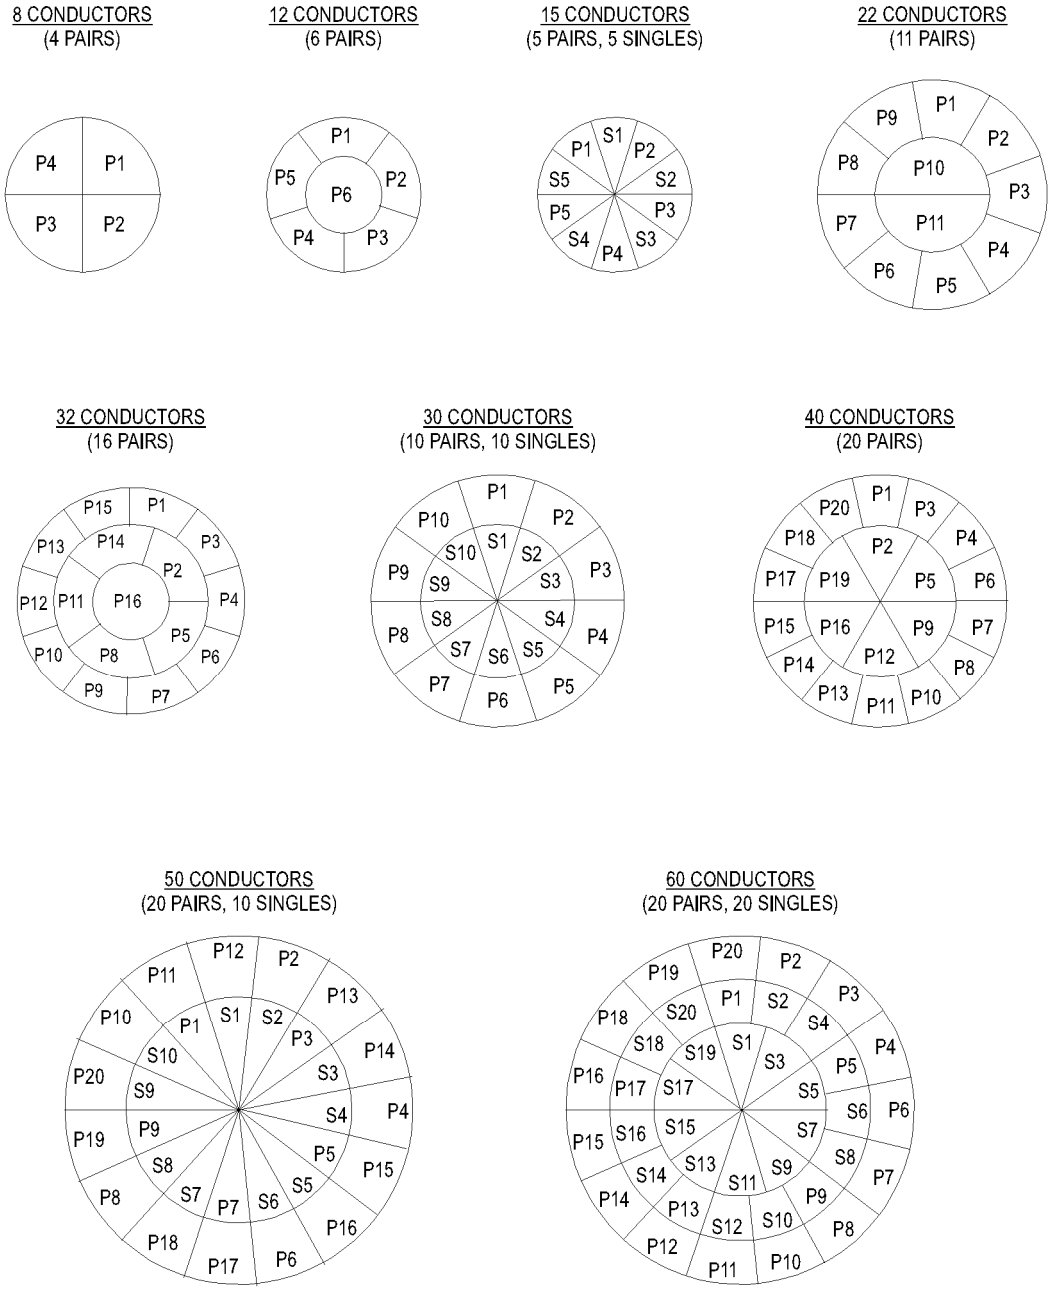


FIGURE 1. Cable configuration-layer type construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.



REFERENCE 2a. 24 CONDUCTORS (8 pairs, 8 singles).

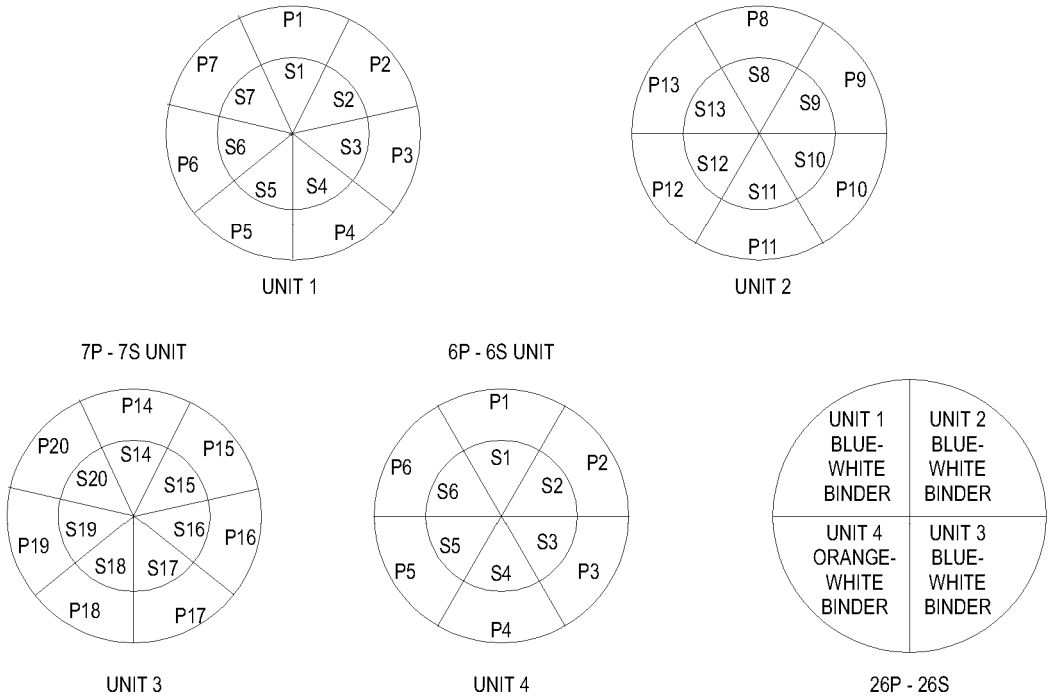

REFERENCE 2b. 78 CONDUCTORS (26 pairs, 26 singles)

FIGURE 2. Cable configuration-unit type construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

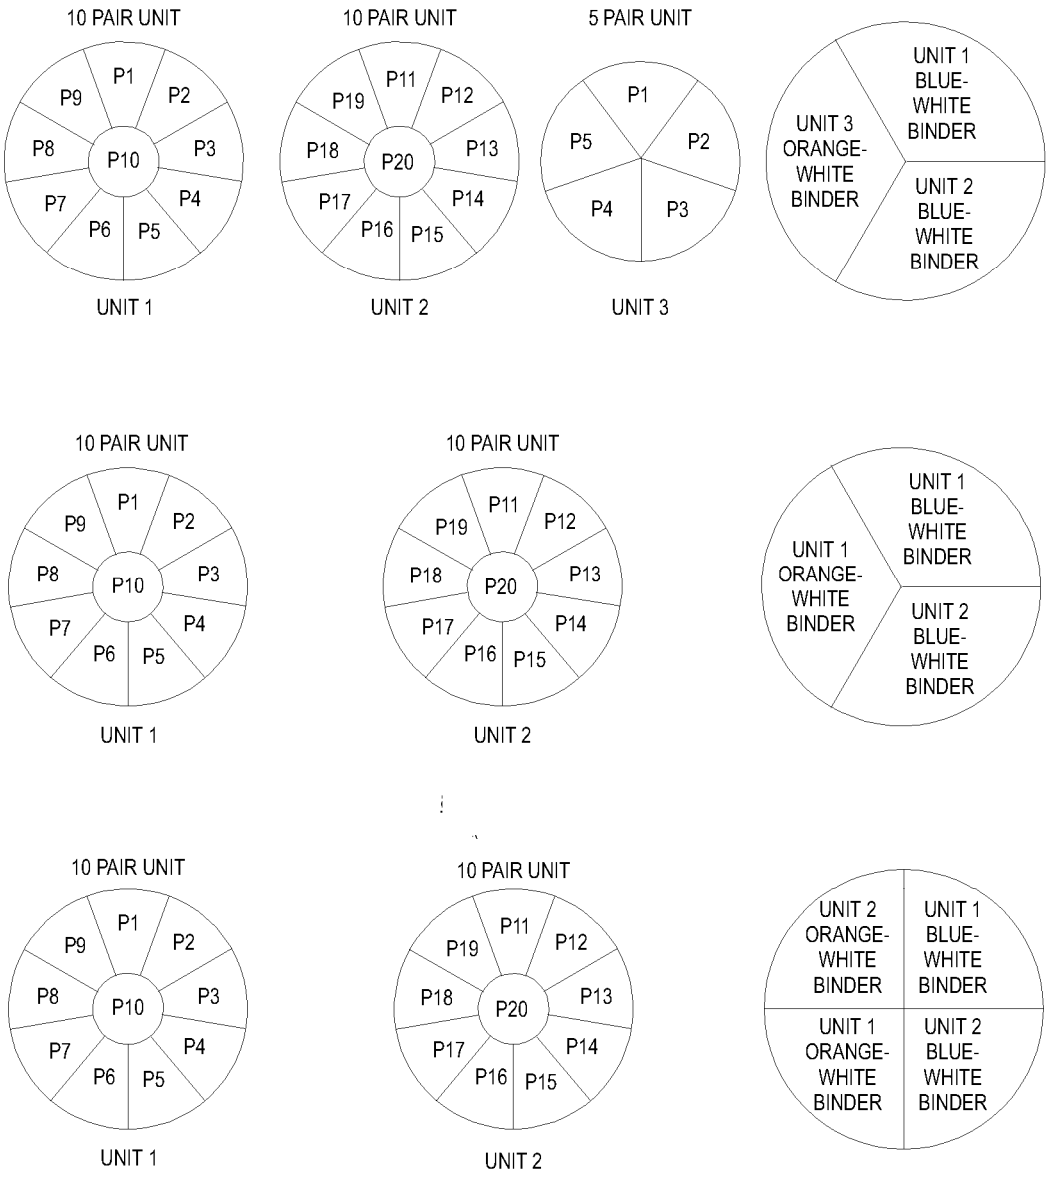


FIGURE 3. Cable configuration- 50, 60 and 80 conductors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

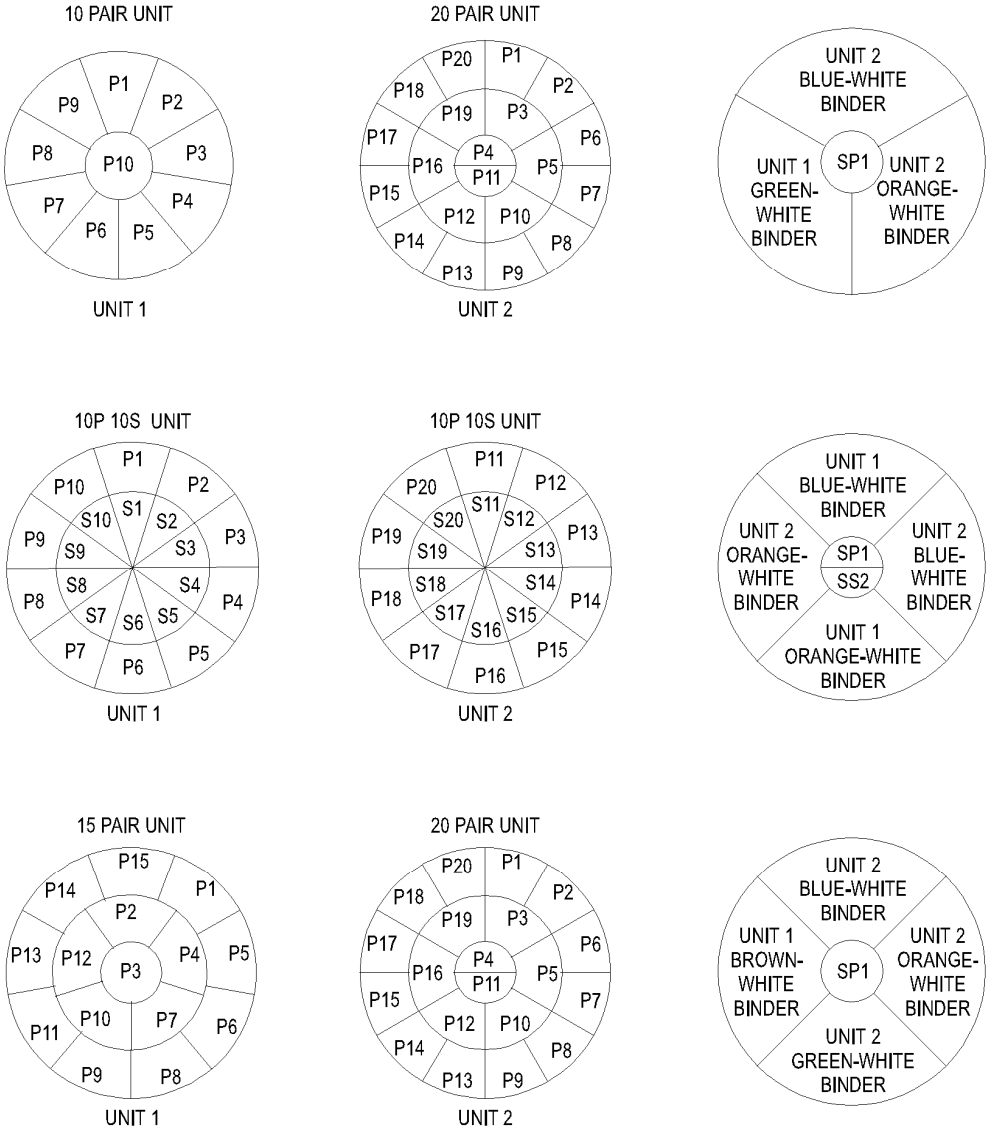


FIGURE 4. Cable configuration – 102, 123 and 152 conductors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

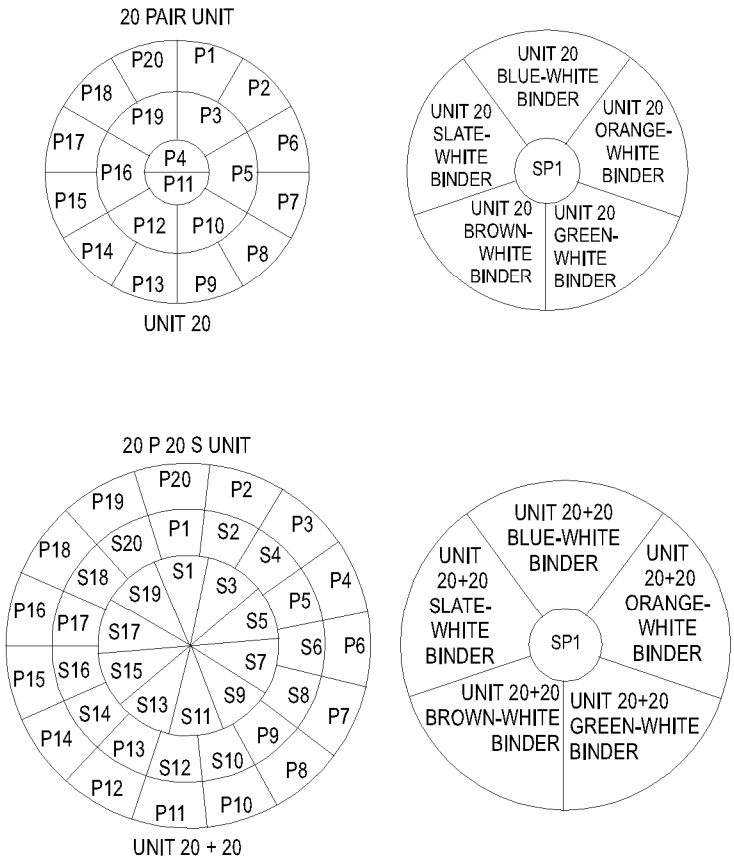


FIGURE 5. Cable construction –202 and 302 conductors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

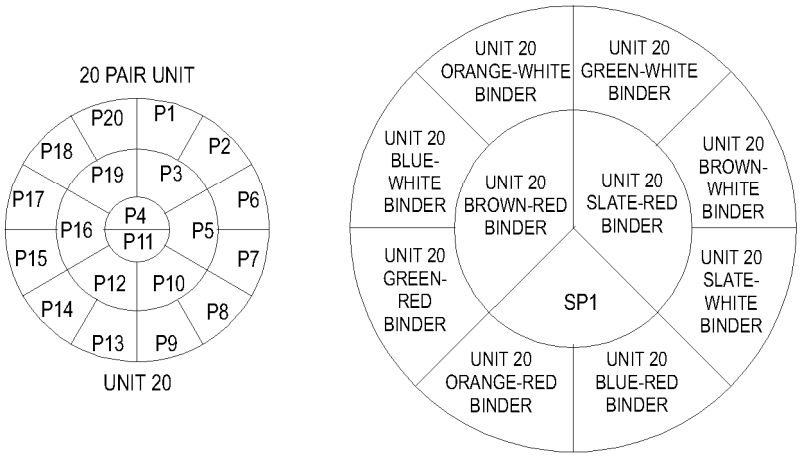


FIGURE 6. Cable construction – 402 conductors.

3.11.5 Cold bend. The insulation shall not develop any cracks visible to the unaided eye after being subjected to -18 °C for one hour and immediately bent over a .0625 inch (1.59 mm) diameter mandrel.

3.11.6 Flammability. The insulation on a conductor may burn when exposed to an open flame, but shall be self-extinguishing within 5 seconds after the flame is removed.

3.11.7 Compression strength. The insulation shall withstand a compression load of 1,000 pounds without failure.

3.12 Physical requirements for jacket.

3.12.1 Tensile strength. The jacket shall have a minimum tensile strength of 1,800 psi.

3.12.2 Elongation. The jacket shall have an elongation of 200 percent minimum.

3.12.3 Aged elongation. The jacket shall have a minimum elongation of 100 percent after aging for 48 hours at 120 °C.

3.12.4 Heat shock. The jacket shall show no cracks when the cable is exposed to heating of 120 °C for one hour while bent around a mandrel (see 4.4.3.4) and then subjected to straightening after cooling to room temperature.

3.12.5 Cold bend. The jacket shall not develop any cracks when exposed to cold temperatures of -18 °C for 24 hours and then subjected to bending.

3.12.6 Flammability. The jacket shall be self-extinguishing within 5 seconds after being exposed to flame for 15 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

3.12.7 Jacket stripping. The jacket shall not adhere to the cable and shall be freely skinned from the cable with the ripcord.

3.13 Workmanship. The cables shall be uniform in quality and free from defects that affect performance, serviceability, or appearance, including lumps, kinks, splits, abrasions, scrapes, corroded surfaces, skin impurities, and faulty extruded surfaces.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as conformance inspection (see 4.2).

4.2 Conformance inspection. Conformance inspection shall consist of the inspections listed for groups A, B, and C. Conformance inspection shall be performed on every lot of cable procured under this specification.

4.3 Test equipment and inspection facilities. Test and measuring equipment and inspection facilities of sufficient accuracy, quality, and quantity to permit performance of the required inspection shall be established and maintained by the contractor. The establishment and maintenance of a calibration system to control the accuracy of the measuring and test equipment (e.g., non-Government standard [NGS] or federal or military standard) shall be in accordance with NCSL-Z540.1 or equivalent.

4.3.1 Inspection lot. Unless otherwise specified (see 6.2), an inspection lot shall consist of all finished cable of the same Part or Identifying Number (PIN), produced under essentially the same conditions on the same machine, which is presented for inspection and shipment at one time.

4.3.2 Unit of product. The unit of product for determining lot size (see 6.4) for sampling shall be the quantity of cable offered for inspection on one coil, one reel, or one spool, as applicable.

4.3.3 Group A inspection. Group A inspection shall consist of the inspections specified in table IV. If these inspections cannot be performed on the finished cable as submitted for inspection, the inspections may be performed at an appropriate stage of the manufacturing operation. The inspections shall be performed on every lot of cable acquired under this specification.

4.3.4 Group B inspection. Group B inspection shall consist of the inspections specified in table V. Group B inspection shall be performed on sample specimens that have been subjected to and have passed the group A inspection. Group B inspection shall be performed in any order on randomly selected sample specimens (see 4.3.6) from an inspection lot.

4.3.4.1 Group B sampling. A random sample shall first be selected from the lot. The sample size shall be based on the inspection lot size from which the sample was selected for group A inspection. Inspection sample size shall be specified in table VII.

4.3.5 Group C inspection. Group C inspection shall consist of the inspections specified in table VI. Group C inspection shall normally be performed on sample specimens that have been subjected to and have passed group A and B inspections.

4.3.5.1 Group C sampling. Three sample specimens shall be randomly selected and inspected in any month that the cable is produced.

4.3.6 Specimen lengths. Unless otherwise specified herein, the specimen shall be of the length specified in the applicable test method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

TABLE IV. Group A inspection.

Inspection	Requirement	Verification
Visual and dimensional		4.4.4
Construction	3.3	
Materials	3.4	
Conductor	3.5	
Joints in conductors	3.5.1	
Insulation	3.6	
Insulation thickness	3. 6.1	
Diameter of insulated conductor	3.6.2	
Color code	3.6.3, 3.6.3.1, 3.6.3.2	
Cabling, binders	3.7, 3.7.1	
Core wrapping	3.7.2	
Ripcord	3.8	
Jacket	3.9	
Diameter of finished cables	3.9.1	
Workmanship	3.13	
Electrical		
Continuity	3.10.1	4.4.1.1
Short circuits	3.10.2	4.4.1.2
Resistance	3.10.3	4.4.1.3
Dielectric strength	3.10.4	4.4.1.4
Insulation resistance	3.10.5	4.4.1.5

TABLE V. Group B inspection.

Physical inspection	Requirement	Verification
Insulation		
Tensile strength	3.11.1	4.4.2.1
Elongation	3.11.2	4.4.2.2
Adhesion	3.11.3	4.4.2.3
Shrinkage	3.11.4	4.4.2.4
Cold bend	3.11.5	4.4.2.5
Jacket		
Tensile strength	3.12.1	4.4.3.1
Elongation	3.12.2	4.4.3.2
Heat shock	3.12.4	4.4.3.4
Jacket stripping	3.12.7	4.4.3.7

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Group C inspection.

Physical inspection	Requirement	Verification
Insulation		
Flammability	3.12.6	4.4.2.6
Compression strength	3.12.7	4.4.2.7
Jacket		
Aged elongation	3.13.3	4.4.3.3
Cold bend	3.13.5	4.4.3.5
Flammability	3.13.6	4.4.3.6

4.3.7 Rejected lot. Failure to pass any of the tests and inspections shall constitute failure of the lot and the lot shall be rejected. If an inspection lot is rejected, the lot may be reworked to correct the defects or screen out the defective units, and the lot submitted for re-inspection. Such lots shall be separated from new lots and shall be identified as re-inspected lots.

4.3.8 Non-compliance. If a sample fails to pass any of the inspections, the contractor shall notify the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, on all units of the product. Acceptance and shipment of the product shall be discontinued until corrective action has been taken. After the corrective action has been taken, the inspections shall be repeated on replacement articles. (This includes all tests and examinations, or only the test that the original sample failed, at the option of the cognizant inspection activity.) Where group A inspection is re-instituted, final acceptance and shipment shall be withheld until group B or C inspection has shown that the corrective action was successful. In the event of failure after re-inspection, information concerning the failure shall be provided to the cognizant inspection activity.

TABLE VII. Inspection sample.

Inspection lot size 1/	Sample size
1	1
2 to 8	2
9 to 90	3
91 to 150	12
151 to 280	19
281 to 500	21
501 to 1,200	27
1,201 to 3,200	36
3,201 to 10,000	38
10,001 to 35,000	46

1/ Lot size is based on number of reels, spools, or coils

4.4 Methods of inspection.

4.4.1 Electrical inspection.

4.4.1.1 Continuity. Test continuity of all conductors with a low dc voltage and an appropriate indicating meter.

4.4.1.2 Short circuit. Test each conductor individually to verify that each conductor is free of any contact with any of the other conductors that may be bunched together. Use a test voltage of 100 Vdc, minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

4.4.1.3 Resistance. Measure the resistance of the conductors to verify that the resistance does not exceed the 94Ω requirement at 20 °C.

4.4.1.4 Dielectric strength. Apply 1,500 V ac between each conductor in turn, and the remaining conductors connected together, for one minute to verify that the insulation meets the dielectric requirement. The conductors may be split into groups so that neither an adjacent single conductor nor both conductors of a pair are in the same group.

4.4.1.5 Insulation resistance. Following the dielectric strength test of 4.4.1.4, verify the insulation resistance between each conductor in turn and the remaining conductors connected together at 20 °C. Use a testing voltage of not less than 100 V dc nor more than 550 V dc. The measured value shall meet the requirement specified.

4.4.2 Physical inspections for insulation.

4.4.2.1 Tensile strength. A specimen of the insulation shall be tested in accordance with method 3021 of FED-STD-228.

4.4.2.2 Elongation. A specimen of the insulation shall be tested in accordance with method 3031 of FED-STD-228.

4.4.2.3 Adhesion. The insulation adhesion shall be verified by removing 4.5 inches (114 mm) of insulation from one end and .25 inch (6.35 mm) from the other end of a 6-inch sample of insulated conductor. The 4.5 inch (114 mm) end of the conductor shall be put through a .125-inch (3.17 mm) thick brass plate having a hole approximately .010 inch (.254 mm) larger than the diameter of the wire. A loop in the long end of the sample shall be made and a tension testing scale attached to this loop. The scale shall be pulled at the rate of approximately 10 feet per minute to verify that the maximum pull required to remove the conductor from the 1.25 inch (31.8 mm) of insulation is not over 3 pounds.

4.4.2.4 Shrinkage. Remove .5 inch (12.7 mm) of insulation from one end of a 6-inch (152 mm) sample of insulated conductor taken from the finished cable. Immerse the bare conductor .25 inch (6.35 mm) deep for 20 seconds into a pot of solder at approximately 160 °C. Examine the insulation to verify that it has shrunk not more than .0625 inch (1.59 mm) from the end of the conductor.

4.4.2.5 Cold bend. Condition an 8 inch (203 mm) sample of an insulated conductor and a .0625 inch (1.59 mm) diameter mandrel for one hour at -18±2 °C. At the end of the hour, while the sample and mandrel are still in the cold box, wrap the sample for five consecutive turns in a closed helix about the mandrel at the rate of approximately 60 turns per minute. Examine the insulation to verify that no cracks are visible to the unaided eye.

4.4.2.6 Flammability. Suspend an 18 inch (457.20 mm) length of insulated conductor vertically in a draft-free enclosure and apply the flame of a Bunsen burner for 5 seconds. The flame shall be applied so that the apex of the blue cone is played on the lower portions of the wire at the angle of approximately 45 degrees. After removing the flame, the insulation shall be observed for self-extinguishment.

4.4.2.7 Compression strength. Condition a test specimen of insulated wire for at least 1 hour at a temperature of 25±3 °C, at which temperature the compression strength shall be determined. Place the test specimen between 2 inch x 2 inch (50.80 mm) x (50.80 mm) plates and measure the crushing load required to cause contact between the wire and either of the plates when the approach speed of the plates is approximately 2.25 inches (57.1 mm) per minute.

4.4.3 Physical inspections for jacket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

4.4.3.1 Tensile strength. A specimen of the jacket shall be tested in accordance with method 3021 of FED-STD-228.

4.4.3.2 Elongation. A specimen of the jacket shall be tested in accordance with method 3031 of FED-STD-228.

4.4.3.3 Aged elongation. Oven-age a specimen of the jacket for 48 hours at 120±2 °C and then test in accordance with method 4001 of FED-STD-228.

4.4.3.4 Heat shock. Wind six close turns of a finished cable around a mandrel and fasten the ends securely to the mandrel. The diameter of the mandrel shall be three times the overall diameter of the cable for all cables under .75 inch (19 mm). For cables .75 inch (19 mm) and larger, the mandrel diameter shall be eight times the overall diameter of the cable. Place the cable on the mandrel in an oven maintained at 120±2 °C for a period of 1 hour. Remove from the oven and allow to cool to room temperature, then, remove the cable from the mandrel and straighten. Slit the jacket lengthwise and remove from the core. Examine the jacket to verify that there are no visible cracks to the unaided eye.

4.4.3.5 Cold bend. Condition a sample of finished cable in a cold box at –18±2 °C for 24 hours. After the 24 hours of exposure, remove the sample from the cold box and immediately bend it 180 degrees around a mandrel of the size specified below at a uniform rate of bend. Complete the bending within 10 seconds. Examine the jacket to verify that there are no cracks visible to the unaided eye.

Number of conductors	Mandrel diameter inches (mm)
8 - 13	.5 (12.70)
14 - 24	1.5 (38.10)
25 - 65	2.0 (50.80)
66 - 109	2.5 (63.50)
110 - 205	4.0 (101.60)
206 - 305	8.0 (203.20)
306 - 405	12.0 (304.80)

4.4.3.6 Flammability. Expose a sample of the jacket to a Bunsen burner flame for 15 seconds in a draft-free area. Remove the Bunsen flame and verify that the jacket flame goes out within 5 seconds. Repeat three times at 15-second intervals to verify that the jacket is self-extinguishing and does not continue to burn.

4.4.3.7 Jacket stripping. Pull the ripcord to cut a section of the jacket. Remove the jacket to determine that it skins freely and clearly.

4.4.4 Visual and dimensional inspection. Inspect the finished cable to verify that the materials, dimensions, and all workmanship comply with this specification. Certification as to the materials and splices may be accepted at the option of the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD personnel or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The switchboard cable covered by this specification is intended for use indoors for interconnecting multiple appearances of circuits on military switchboards with the distributing frame.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. The quantity required.

c. Type of cable (number of pairs and singles to be furnished) (see 1.2).

d. The specific issue of individual documents referenced (see 2.2.1 and 2.3).

e. Inspection lot size, if different than specified (see 4.3.1).

f. Packaging and packing requirements (see 5.1).

6.3 Subject term (key word) listing.

Conductors
Electrical
PVC
Ripcord

6.4 Definitions. For the purpose of this specification, the definitions given below should apply.

Lot size. A lot size is the number of units of product in an inspection lot (see 4.3.1). The minimum and maximum lot sizes for inspection purposes should be determined by the Government and may differ from the quantity designated in the contract or order as a lot for production, shipment, or other purposes.

Sample. A sample is one or more sample units selected from an inspection lot to represent that inspection lot for inspection purposes.

Sample unit. A sample unit is a unit of product (see 4.3.2), selected in an unbiased manner to be a sample, from which specimens are taken for inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.

Specimen. A specimen is a single piece of finished cable that is taken from a sample unit and subjected to inspection.

Finished cable. Finished cable is cable on which all manufacturing operations have been completed and which is ready to be submitted for acceptance.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

6.6 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. Table VIII lists the Environmental Protection Agency (EPA) top seventeen hazardous materials targeted for major usage reduction. Use of these materials should be minimized or eliminated unless needed to requirements specified herein (see section 3).

TABLE VIII. EPA top seventeen hazardous materials.

Benzene	Dichloromethane	Tetrachloroethylene
Cadmium and Compounds	Lead and Compounds	Toulene
Carbon Tetrachloride	Mercury and Compounds	1,1,1 Trichoroethane
Chloroform	Methyl Ethyl Ketone	Trichloroethylene
Chromium and Compounds	Methyl Isobutyl Ketone	Xylene
Cyanide and Compounds	Nickel and Compounds	

CONCLUDING MATERIAL

Custodians:
Army - CR
Air Force - 11
DLA –CC

Preparing activity:
DLA - CC

(Project 6145-2006-021)

Review activity:
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, please verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:22Z
Check the source to verify that this is the current version before use.