MILITARY SPECIFICATION

FUZE, PIBD, XM740, SECOND ENVIRONMENT SENSOR FOR

This specification is approved for use by US Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

1.0 SCOPE

1.1 This specification establishes the requirements for the manufacture and acceptance of the Second Environment Sensor (SES) critical item.

2.0 APPLICABLE DOCUMENTS

2.1 Government documents - Except as noted, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-S-634	Steel Bar, Carbon, Cold Finished, (Standard Quality)
PPP-T-97	Tape, Pressure Sensitive, Adhesive, Filament Reinforced

Military

MIL-B-117	Bag, Sleeve and Tubing - Interior Packaging

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

FSC:1390

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn: DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests For
MIL-STD-810	Environmental Test Methods

DRAWINGS

Army

9302283	Housing, Sensor, Second Environment
9307250	Sensor Assembly, Second Environment

Other Publications

AR700-15	Packaging of Material

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3.0 REQUIREMENTS

3.1 Item definition - The Second Environment Sensor (SES) provides an electrical signal when the magnetic coupling with external magnetic material is broken. The SES is used in pairs mounted on the surface of projectiles to sense projectile muzzle velocity.

One SES mounted on the surface of a projectile provides power and start signal to the associated electronic circuit when the magnetic coupling to the gun tube is broken during cannon launch of the projectile. A second sensor, spaced physically some known distance aft of the first SES, provides a second signal to the electronics. The spacing and the time between signals are used to enable arming of the projectile fuze when launched at a minimum safe velocity. The SES can be used in either location interchangeably.

3.2 Characteristics

3.2.1 Performance

3.2.1.1 Inductance - The inductance of the coil of the SES assembly shall be 1.53 ± 0.1 millihenrys when measured at a frequency of 1000 ± 3% Hz and with a Q factor of 1.23 ± 0.10.

3.2.1.2 Resistance - The resistance of the coil of the SES shall be 7.25 ± 1.0 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

3.2.1.3 Insulation resistance - The insulation resistance measured from either the red or white leadwire, to the housing and pole disk shall be 100 megohms minimum.

3.2.1.4 Magnetic strength - The magnetic strength shall be 3.2 pounds minimum when tested in accordance with 4.5.2.4.

3.2.1.5 Signal polarity - The polarity of the signal generated at separation in 3.2.1.4 shall be red leadwire positive and white leadwire negative.

3.2.1.6 Leadwire integrity - Each leadwire shall support a static load of not less than five (5) pounds for a period of not less than thirty (30) seconds and meet the requirements of paragraph 3.2.1.2 thereafter.

3.2.2 Environmental conditions

3.2.2.1 High temperature - The SES shall meet the performance requirements specified in 3.2.1.1 through 3.2.1.5 when stabilized at temperatures up to 145°F.

3.2.2.2 Low temperature - The SES shall meet the performance requirements specified in 3.2.1.1 through 3.2.1.5 when stabilized at temperatures down to −25°F.

3.2.2.3 Acceleration high g - The SES shall meet the performance requirements specified in 3.2.1 following exposure to acceleration of 9000 +1500, -300 g's at temperatures from -25°F to 145°F. The direction of acceleration is shown in Figure 1. The acceleration/time curve shall have no sharp discontinuities and shall remain above 8000 G's for at least 1.5 milliseconds.


3.2.2.4 Transportation vibration - The SES shall withstand and meet the performance requirements specified in 3.2.1.1 through 3.2.1.5 following exposure to the following vibration levels at temperatures from -50°F to 160°F.

Frequency (Hz)	Level ± 10%
5-11	0.4 inch displacement, peak to peak
12-37	2.5 g acceleration, peak
38-52	0.036 inch displacement, peak to peak
53-500	5.0 g acceleration, peak

3.2.2.5 Humidity - The SES shall meet the performance requirements specified in 3.2.1.1 through 3.2.1.5 following exposure to atmosphere with a relative humidity of 94 ± 4 percent over a temperature range of 68°F to 149°F.

3.2.2.6 Five-foot drop - The SES shall meet the performance requirements specified in 3.2.1.1 through 3.2.1.5 following a drop of 5 feet onto a steel plate solidly supported by concrete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

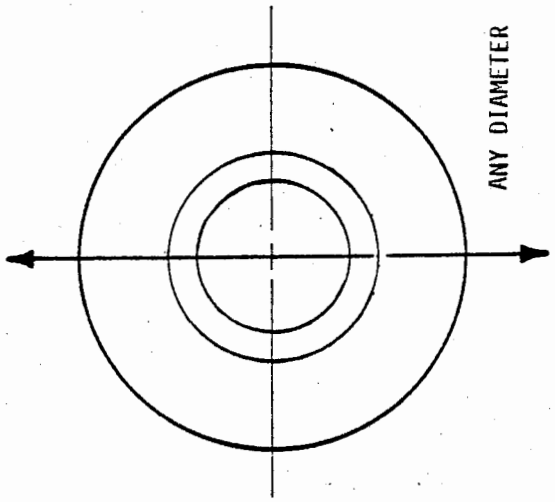

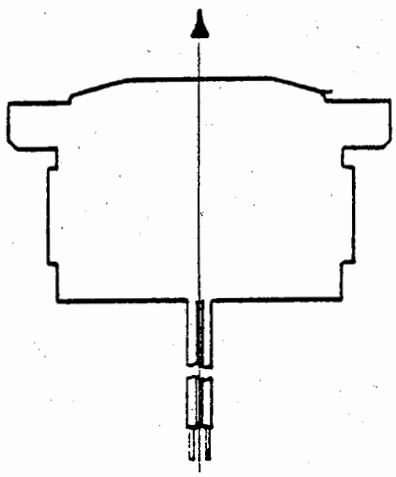


FIGURE 1 DIRECTION OF APPLIED ACCELERATION FORCES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

3.2.2.7 Thermal shock - The SES shall meet the performance requirements specified in 3.2.1.1 through 3.2.1.5 following thermal shock between -50°F and 160°F in a one minute period.

3.2.2.8 Axial acceleration - The SES shall meet the performance requirements specified in 3.2.1.1 through 3.2.1.5 following exposure to an axial shock load of 750 ± 50 g's for a period of less than one millisecond along the longitudinal axis of the SES. The direction of the acceleration force shall be as shown in Figure 1.

3.3 Design and construction

3.3.1 Production drawings - The SES shall be fabricated and assembled in accordance with the requirements specified on Drawing 9307250 and the applicable specifications referenced thereon.

3.3.2 Workmanship - All parts shall be fabricated and finished in a thorough workmanlike manner. Except as otherwise specified, the parts shall be free of cracks, scratches, burrs, dents, gouges, surface defects or any surface discontinuities. The items shall be free from dirt, chips, grease, corrosion, and other foreign material. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat and sharply defined. Exterior surface coatings shall be continuous except for a few scratches not exposing base metal and voids in potting material not exceeding 0.1 inch width, 0.1 inch length and 0.05 inch depth which do not expose the coil, edge of the magnet pole disk or inside surface of the housing.

3.4 First article inspection - This specification makes provisions for first article inspection. First article samples shall meet all the requirements of this specification. Requirements for submission of the first article samples by the contractor shall be as specified in the contract.

4.0 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the procuring activity. The procuring activity reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection - The following types of inspections shall be conducted in this item:

(a) First article inspection (4.3)

(b) Quality conformance inspection (4.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

4.3 First article inspection

4.3.1 Submission - The contractor, when required by contract, shall submit a first article sample of 20 assemblies, for examination and test by the procuring activity in accordance with Table I. The first article sample shall have been inspected in accordance with Table II. The contractor shall additionally submit 5 complete sets of parts and subassemblies as listed in "Classification of Defects and Tests," Table II. Environmental tests shall be conducted in the sequence indicated. Performance of each assembly shall be as indicated in each environmental test method. The testing shall be considered destructive and the tested assemblies shall not be returned to a lot for delivery. All assemblies and components shall have been produced by the contractor or furnished by a supplier using the same production processes, procedures, and equipment which will be used in fulfilling the contract. All parts and material shall be obtained from the same source(s) of supply as will be used in regular production. Prior to submission, the contractor shall inspect the sample to the degree necessary to ensure that it conforms to the requirements of the contract and submit a record of this inspection with the sample, including statements of findings for materials, processes, and tests. A sample containing known defects will not be submitted unless specifically authorized by the procuring activity. A first article sample, or portion thereof, as directed by the procuring activity, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days, or whenever a change occurs in manufacturing process, material used, drawing or specification, such as to significantly affect the product uniformity as determined by the procuring activity.

4.3.2 Inspections to be performed - First article test specimens may be subjected by the procuring activity to any or all of the examinations and tests specified in this specification and to any or all requirements of the applicable drawings.

4.3.3 First article rejection - If any test specimen fails to comply with any of the applicable requirements, the first article samples shall be rejected. The procuring activity reserves the right to terminate its inspection upon failure of any test specimen in the sample to comply with any of the stated requirements.

4.4 Quality conformance inspection

4.4.1 Inspection lot - Unless otherwise specified herein or by the procuring activity, inspection lot size, lot formation, and presentation of lots shall be in accordance with the inspection and sampling procedures herein and the "submission of product" provisions of MIL-STD-105. Lot size shall be not greater than 1 month's production. Parts and subassemblies shall each be of one dash number of the same drawing number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

4.4.2 Inspections

4.4.2.1 Sampling inspection - Each lot of assemblies shall consist of hardware which has been inspected per Table II. Unless otherwise specified, sampling shall be to level II of MIL-STD-105. Lots failing to meet the requirements of Table II shall be rejected.

4.4.2.2 Lot acceptance testing - Each lot of assemblies shall be inspected in accordance with Table III. Sampling shall be to level S-3 of MIL-STD-105. Tests shall be conducted in the sequence shown except that the High and Low Temperature tests may be interchanged. The sample shall meet the requirements of Table III for acceptance of the lot. If the sample fails to meet these requirements the lot shall be rejected.

4.5 Test methods

4.5.1 Test conditions

4.5.1.1 Environmental conditions - Unless otherwise specified for the purpose of test, testing shall be conducted at the following conditions:

(a)	Temperature	$72^{o} \pm 18^{o}F$ ($22.2^{o} \pm 10^{o}C$)
(b)	Relative Humidity	90 percent maximum
(c)	Barometric Pressure	28 to 32 inches of mercury

4.5.1.2 Test tolerances - All tolerances specified herein are absolute with no allowance made for measuring equipment inaccuracy. Measurements shall ensure that the values measured are within the tolerances or limits specified.

4.5.1.3 Inspection equipment - The inspection equipments required to perform the examinations and tests prescribed herein are described in the "Paragraph Reference/Inspection Method" column in the inspection tables included herein. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6.4.

4.5.2 Performance - Unless otherwise noted the test measurements shall be performed with SES free of magnetic influence such as steel plates or magnets within a distance of four inches.

4.5.2.1 Inductance - The inductance shall be as specified in 3.2.1.1 when measured between the red and white leads of the SES.

4.5.2.2 Resistance - The coil resistance shall be as specified in 3.2.1.2 when measured between the red and white leads of the SES.

4.5.2.3 Insulation resistance - The insulation resistance between the housing and pole disk of the SES to either lead shall be as specified in 3.2.1.3 when a voltage of 50 $\pm$ 5 vdc is applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

4.5.2.4 Magnetic strength - Secure the SES with its pole disc up in a holding fixture (a minimum of two full threads or rigidly clamped). Place a type 1010 to 1018 steel disk per QQ-S-634 (2.00 ± .06 inch diameter, .25 ± .02 inch thick with one side flat and the other end adapted to attach to a force gage) over the SES pole disk. Ensure the steel disk is centered on the SES housing.

Slowly apply a vertical force through the force gage until separation of the steel disk and the pole disk occurs. The separation force shall be as specified in 3.2.1.4.

4.5.2.5 Signal polarity - The pulse polarity shall be as specified in 3.2.1.5 when tested as specified in 4.5.2.4.

4.5.2.6 Leadwire integrity - Mount the SES such that each lead can be separately tested by attaching a force gage and pulling on the leads. The lead shall withstand without damage the force specified in 3.2.1.6. The SES shall be tested as specified in 4.5.2.2 and 4.5.2.3 following the lead-wire integrity test.

4.5.3 Physical and dimensional characteristics - The physical and dimensional characteristics shall be inspected to the requirements of Drawing 9307250.

4.5.4 Workmanship - The SES shall be examined to verify conformance with the workmanship requirements of 3.3.2.

4.5.5 Marking - The marking shall be as specified on Drawing 9307250.

4.5.6 Packaging and shipping - The packaging and preservation for shipping shall be inspected for compliance with the requirements of 5.0.

4.5.7 Environmental tests

4.5.7.1 High temperature - The SES shall be conditioned at 145 ± 5°F for a minimum of one hour. The units shall be tested as specified in 4.5.2.1 through 4.5.2.5. These tests may be performed out of the temperature chamber if accomplished within one minute after removal from the chamber.

4.5.7.2 Low temperature - The SES shall be conditioned at -25 ± 5°F for a minimum of one hour. The units shall be tested as specified in 4.5.2.1 through 4.5.2.5. These tests may be performed out of the temperature chamber if accomplished within one minute after removal from the chamber.

4.5.7.3 Acceleration high-g, high temperature - The SES assembly shall be mounted in a carrier. The carrier/SES assembly shall then be conditioned at 145 ± 5°F for a minimum of one hour. The carrier/SES assembly shall be mounted in a test projectile or simulated projectile and subjected to the acceleration of 3.2.2.3 within 10 minutes after removal from the temperature chamber.

Remove the carrier/SES assembly from the test projectile. Remove the SES from the carrier and condition it at 145 ± 5°F for one hour. Test the unit as specified in 4.5.7.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

4.5.7.4 Acceleration high-g, low temperature - The SES assembly shall be mounted in a carrier. The carrier/SES assembly shall then be conditioned at -25 ± 5°F for a minimum of one hour. The carrier/SES assembly shall be mounted in a test projectile or simulated projectile and subjected to the acceleration of 3.2.2.3 within 10 minutes after removal from the temperature chamber.

Remove the carrier/SES assembly from the test projectile. Remove the SES from the carrier and condition it at -25 ± 5°F for one hour. Test the unit as specified in 4.5.7.2.

4.5.7.5 Transportation vibration

4.5.7.5.1 First article - The SES shall be tested to the requirements as specified in MIL-STD-331, Test 119, Procedure 1, with the following exceptions:

(a) The cold temperature shall be -50°F rather than -65°F.

(b) The stabilization time shall be 1 hour rather than 4 hours.

Following vibration, the SES shall be tested as specified in 4.5.7.1 and 4.5.7.2.

4.5.7.5.2 Lot acceptance - The SES shall be tested to the requirements as specified in MIL-STD-331, Test 119, Procedure 2, except the units shall be vibrated in each axis for 30 minutes with a sweep time of 15 minutes. Following vibration, the SES shall be tested as specified in 4.5.2.1 thru 4.5.2.5.

4.5.7.6 Humidity - The SES shall meet the requirements of 4.5.2.1 through 4.5.2.5 after being subjected to Humidity in accordance with MIL-STD-810, Method 507.1, Procedure II.

4.5.7.7 Five-foot drop - The SES shall meet the requirements of 4.5.2.1 thru 4.5.2.5 after being subjected to a five foot drop at ambient conditions in accordance with MIL-STD-331, Test 111.1, Procedure 1, Criteria B. One SES shall be dropped in each orientation and no SES shall be subjected to more than one drop.

4.5.7.8 Thermal shock - The SES shall meet the requirements of 4.5.2.1 thru 4.5.2.5 after being subjected to temperature shock per MIL-STD-810, Method 503.1, with the following exceptions:

(a) The cold temperature in each cycle shall be -50 ± 2.5°F.

(b) The exposure time at each temperature in a cycle shall be one hour.

(c) The transfer time from one temperature to the other shall be less than one minute.

4.5.7.9 Axial acceleration - The SES shall meet the requirements of 4.5.2.1 thru 4.5.2.5 after being exposed to an axial shock load of 750 ± 50 g's with a shock pulse of less than one millisecond. The direction of the applied acceleration force shall be as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

5.0 PREPARATION FOR DELIVERY

5.1 Preservation and packaging - Place each item in a bag in accordance with Type II, Class C, Style 1 of MIL-B-117 and seal. Place the bagged items in a 275 pound test corrugated fiberboard carton having 0.050 inch solid fiber partitions with cell size of 1.5 inches by 1.25 inches by 0.75 inch high. Seal the carton with filament tape in accordance with PPP-T-97, Type IV. Preservation shall be in accordance with AR700-15, Level B.

5.2 Packing - Overpack the sealed cartons in quantities such that the gross weight will not exceed 65 pounds in 200 pound test corrugated boxes using anti-static cushion dunnage to ensure a light, secure pack. Seal the overpack with reinforced sealing tape.

5.3 Marking - The shipping boxes shall be marked in accordance with MIL-STD-129.

6.0 NOTES

6.1 Intended use - The item described by this specification is intended for use in the XM712 Projectile.

6.2 Ordering data - Procurement documents shall specify the following:

6.2.1 Procurement requirements

(a) Title, number and date of this specification.

(b) Quantity required and delivery schedules.

(c) Serialization requirements, if applicable.

(d) Quality Conformance Inspection, if other than specified in Section 4 of this specification.

(e) First Article Sample requirements, if other than specified in Section 4 of this specification.

(f) Packaging requirements, if other than specified in Section 5 of this specification.

(g) Certificates of conformance for each lot or shipment of product.

(h) Requirements for lot control.

6.2.2 Contract data requirements

(a) Contract data requirements for inspection equipment designs (conforming to Data Item Description DI-E-1118 or DI-R-1714 with appropriate addendum to each).

(b) Data Cards - When required by incorporation of DD Form 1423 into the contract, data cards shall be prepared for each lot in accordance with Data Item Description DI-L-1410, except that for propellant or explosive lots, Acceptance and Description Sheets will be prepared in accordance with MIL-STD-1171.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

6.3 Definitions

6.3.1 Contractor - Unless otherwise specified, the word contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors, subcontractors, Government Owned, Contractor Operated (GOCO) plants.

6.3.2 Technical data package (TDP) - A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance. It consists of all applicable technical data such as plans, drawings, and associated lists of specifications, standards, models, performance requirements, quality assurance provisions, and packaging data.

6.4 Inspection equipment design - Inspection equipment designs are of two types--Government Special Inspection Equipment (SIE) designs and contractor designs. SIE designs are designated by drawing numbers under the "Method of Inspection" heading in Section 4, or on the equipment lists referenced on the equipment tabulation, whichever is specified in the item detail specification. Design responsibility for all other inspection equipment is assigned to the contractor. The contractor need not furnish any design when a complete government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.4.2 and 6.4.3 should he elect to do so.

6.4.1 SIE designs - SIE designs may consist of any of the following:

(a) Detailed drawings which completely depict all information necessary for the fabrication and use of the item of inspection equipment.

(b) A source control drawing or a specification control drawing as defined in MIL-STD-100.

(c) An envelope drawing, as defined in MIL-STD-100, which establishes the criteria which a detailed design shall meet. When envelope drawings are specified, the contractor shall prepare designs which comply with the criteria therein.

6.4.2 Contractor design - Contractor designs are required for all inspection equipment for which SIE designs are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public). Contractor designs shall include appropriate operation instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by catalog listings or other means which provide sufficient information to permit identification and evaluation by the Government and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment, or with SIE designs if not otherwise covered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

6.4.3 Submission of designs for approval - Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements Lists (DD Form 1423). Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

TABLE I
FIRST ARTICLE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title Sensor Assembly, Second Environment	Sheet 1 of 3		Drawing Number 9307250
				Next Higher Assembly 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
Critical	None defined			
Major				
101	Inductance	100%	3.2.1.1	4.5.2.1
102	Resistance	100%	3.2.1.2	4.5.2.2
103	Insulation resistance	100%	3.2.1.3	4.5.2.3
104	Magnetic strength	100%	3.2.1.4	4.5.2.4
105	Signal polarity	100%	3.2.1.5	4.5.2.5
106	Lead wire integrity	100%	3.2.1.6	4.5.2.6
107	Lead wire length (min)	100%	Dwg.	Gage
108	Distance end to shoulder	100%	Dwg. 9302283	Gage
109	Distance, shoulder to top surface (maximum)	100%	Dwg. 9302283	Gage
110	Housing thread (pitch dia.)	100%	Dwg. 9302283	Gage
Minor				
201	Workmanship	100%	3.3.2	4.5.4

Notes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

TABLE I
FIRST ARTICLE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title: Sensor Assembly, Second Environment	Sheet 2 of 3		Drawing Number: 9307250
				Next Higher Assembly: 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
	GROUP I - 10 SES ASSEMBLIES			
Critical	None defined			
Major				
111	Performance	100%	3.2.1	4.5.2
112	Thermal shock	100%	3.2.2.7	4.5.7.8
113	Acceleration, axial	100%	3.2.2.8	4.5.7.9
114	Five-foot drop	100%	3.2.2.6	4.5.7.7
115	High temperature*	100%	3.2.2.1	4.5.7.1
116	Low temperature*	100%	3.2.2.2	4.5.7.2
Minor	None defined			

Notes:
* Five units at each temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

TABLE I
FIRST ARTICLE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title: Sensor Assembly, Second Environment	Sheet 3 of 3		Drawing Number: 9307250
				Next Higher Assembly: 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
	GROUP II - 10 SES ASSEMBLIES			
Critical	None defined			
Major				
117	Performance	100%	3.2.1	4.5.2
118	Humidity	100%	3.2.2.5	4.5.7.6
119	Transportation vibration	100%	3.2.2.4	4.5.7.5.1
120	Acceleration high - g*	100%	3.2.2.3	--
	High temperature		--	4.5.7.3
	Low temperature		--	4.5.7.4
Minor	None defined			

Notes:
* Five units at each temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

TABLE II
CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title: Sensor Assembly, Second Environment	Sheet 1 of 1		Drawing Number: 9307250
				Next Higher Assembly: 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
Critical	None defined			
Major				
101	Inductance	100%	3.2.1.1	4.5.2.1
102	Resistance	100%	3.2.1.2	4.5.2.2
103	Insulation resistance	100%	3.2.1.3	4.5.2.3
104	Magnetic strength	100%	3.2.1.4	4.5.2.4
105	Signal polarity	100%	3.2.1.5	4.5.2.5
106	Lead wire integrity	0.40%	3.2.1.6	4.5.2.6
107	Lead wire length (min)	0.40%	Dwg.	Gage
108	Distance end to shoulder	0.40%	Dwg. 9302283	Gage
109	Distance, shoulder to top surface (maximum)	0.40%	Dwg. 9302283	Gage
110	Housing thread (pitch dia)	0.40%	Dwg. 9302283	Gage
Minor				
201	Workmanship	0.65%	3.3.2	4.5.4

Notes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

TABLE III
LOT ACCEPTANCE TESTS
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title Sensor Assembly Second Environment	Sheet 1 of 1		Drawing Number 9307250
				Next Higher Assembly 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
Critical	None defined			
Major				
101	Thermal shock	1.0%	3.2.2.7	4.5.7.8
102	Transportation vibration	1.0%	3.2.2.4	4.5.7.5.2
103	High temperature	1.0%	3.2.2.1	4.5.7.1
104	Low temperature	1.0%	3.2.2.2	4.5.7.2
Minor	None defined			
Notes:				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

CUSTODIAN
ARMY-AR

PREPARING ACTIVITY
ARMY-AR
PROJECT NUMBER; 1390-A206

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.