MILITARY STANDARD

MIL-STD-1320-167
(NAVY)


31 OCTOBER 1975

TRUCKLOADING OF HAZARDOUS MATERIALS

MINE, UNDERWATER; MK 55 IN CRATE MK 55 MOD 1
"CONFIGURATION B" SUB ASSEMBLY
WITH ASSOCIATED FLIGHT GEAR

LOAD DATA

SEE TABLE I
(PAGE 2)

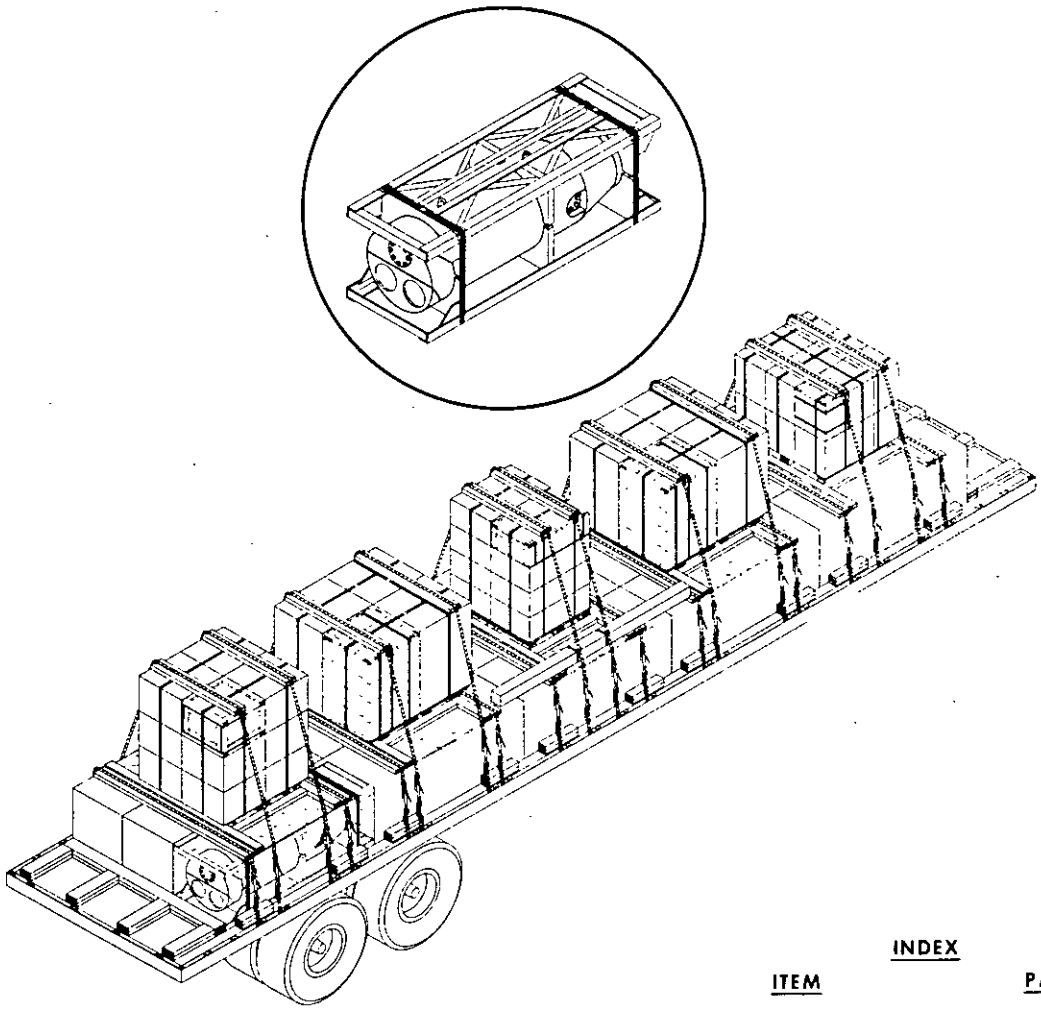

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER	2 & 3
DETAILS	4

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

M.S. Young NWEH 10-2-75
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

E.E. Kelly 10/31/75
SIGNATURE SEA SYSCOM. BY DIRECTION DATE

ORIGINATOR R.F. Stone
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 20261O-23T23:45Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE MK 55 & MODS UNDERWATER MINE, "CONFIGURATION B", IN CRATE MK 55 MOD 1, FIVE DOMESTIC UNIT LOADS OF RELATED FLIGHT GEAR AND ONE WOOD BOX OF ARMING WIRES, (SEE TABLE I, BELOW).

NOTE

THE FLIGHT GEAR SHALL BE PALLETIZED IN ACCORDANCE WITH THE PALLETIZING WR'S LISTED IN TABLE I. THE UNIT LOADS OF FLIGHT GEAR MAY BE OMITTED FROM THE TRUCKLOAD OR ANY COMBINATION OF FLIGHT GEAR UNIT LOADS MAY BE LOADED. THE CORRECT PALLET BASE, DETAILS D OR E, SHALL BE USED FOR THE UNIT LOAD BEING SHIPPED.

2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS, WITH THE TRAILERS' TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. THE MINES ONLY SHALL BE COVERED WITH A FIRE RESISTANT, WATERPROOF TARPAULIN. MINES SHALL BE COVERED WITH THE TARPAULIN PRIOR TO APPLYING THE TIE-DOWN CHAINS.
4. PROTECTOR BOARDS SHALL BE USED BETWEEN THE TARPAULIN AND THE CHAINS. TARPAULINS ARE NOT REQUIRED FOR THE FLIGHT GEAR. THE LOAD SHOWN ON PAGE 3 HAS HAD THE TARPAULIN OMITTED FOR CLARITY.

NOTE

LOCATE PROTECTOR BOARDS ONE IMMEDIATELY FORWARD AND ONE IMMEDIATELY AFT OF THE PALLET BOARD (DETAIL D OR E) TO PREVENT FORE AND AFT MOVEMENT OF PALLET BOARD.

5. THE UNIT LOADS IN THE SECOND LAYER SHALL BE POSITIONED ON THE APPROPRIATE PALLET BASE, SEE DETAILS C AND D. THE PALLET BASE IS POSITIONED ON TOP OF THE TARPAULIN COVERED MINES AND LOCATED SO THAT IT RESTS OVER THE MINES CRATE TOP OUTER TWO CROSS MEMBERS.
6. CHAINS AND LOAD BINDERS SHALL BE USED FOR TIEDOWNS TO SECURE THE LOAD TO THE TRAILER AND THEY SHALL MEET THE FOLLOWING REQUIREMENTS.
   A. CHAINS AND FITTINGS SHALL BE 3/8 INCH AND LOAD BINDERS 3/8 INCH CAPACITY.
   B. CHAINS, FITTINGS AND LOADBINDERS SHALL HAVE A MINIMUM SAFE WORKING LOAD OF 5000 LBS.
   C. "LEBUS" TYPE LOADBINDERS SHALL BE SAFETY WIRED WITH 16 GAUGE SOFT ANNEALED IRON WIRE OR SECURED USING THE END PIECE OF THE 3/8 CHAIN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVWEPS OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTION SHALL CONFIRM THAT THE CHAINS AND LOADBINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE ON ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR A REJECTION OF A CHAIN OR LOADBINDER.
8. THE LADING SHALL BE PROTECTED FROM CHAIN DAMAGE WHERE THE CHAIN GOES OVER THE MINE CRATE AND THE UNIT LOADS BY INSERTING A 2 X 6 BETWEEN THE CHAIN AND THE UNIT LOAD.
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWANCE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO DUNNAGE IN AN ACCESSIBLE AREA AND ATTACH PLACARD "EXPLOSIVES A" TO BOTH SIDES, FRONT AND BACK OF TRAILER.
11. APPLICABLE MATERIAL SPECIFICATIONS. DUNNAGE LUMBER; MM-L-751. NAILS; FF-N-105; TYPE II, STYLE 10, COMMON BRIGHT. STRAPPING; QQ-S-781, TYPE I, CLASS A. PLYWOOD; COMMERCIAL STANDARD CS45, GRADE EXTERIOR C-C.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).


TABLE I

"CONFIGURATION B" MINE, UNDERWATER; MK 55					
UNIT LOAD TITLE & DOCUMENT NUMBER	NO. OF UNIT LOADS	WEIGHT OF ONE UNIT LOAD (APPROX)	DIMENSIONS OF UNIT LOAD	CUBE OF UNIT LOAD	DOT HAZARD CLASSIFICATION
UNDERWATER MINE, MK 55 - WR-53/714	15	2318 LBS	84L X 28 3/4W X 28 7/8H	40.3 CU FT	EXPLOSIVES A
FAIRING; MK 20 TYPE - WR-53/833	2	730 LBS	57 1/2L X 54 1/2W X 47 5/8H	86.3 CU FT	INERT
FIN, TAIL; MK 18 TYPE - WR-53/831	1	602 LBS	45 1/2L X 34 7/8W X 54H	49.5 CU FT	INERT
RELEASE MECHANISM; MK 20 - WR-53/747	1	1584 LBS	51 3/8L X 41 1/4W X 43H	52.7 CU FT	INERT
PARAPAC ASSEMBLY; MK 36 - WR-53/841	1	1198 LBS	48L X 48W X 55 3/4H	65.0 CU FT	INERT
ARMING WIRES; BOX, WOOD	1	39 LBS	108L X 5 1/2W X 5 1/2H	1.9 CU FT	INERT


Source: https://assist.dla.mil -- Downloaded: 202610-23T23:45Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-1320-167, dated 31 Oct 1975 does not include the foldout page 3/4. If you need a copy it must be ordered separately from the ASSIST SERVICE DESK at 215-737-8000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

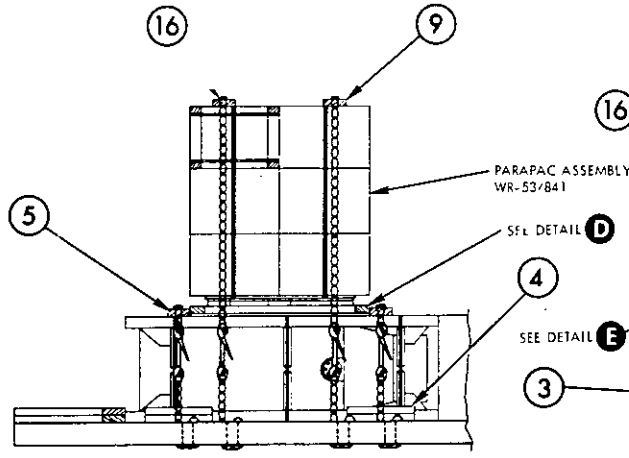


VIEW B-B

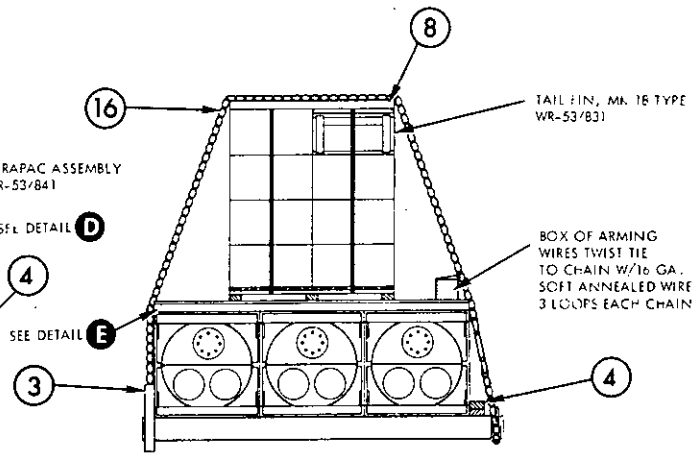


SECTION C-C

TABLE II		
40 X 48 PALLET	DIM "X"	DIM "Y"
WOOD	19	48 1/2
STEEL	21	44 1/2

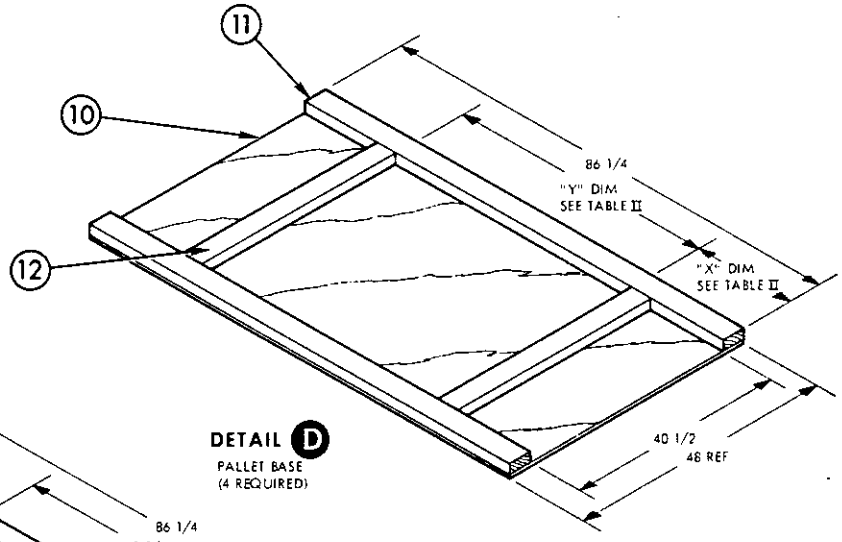

DETAIL D
PALLET BASE
(4 REQUIRED)

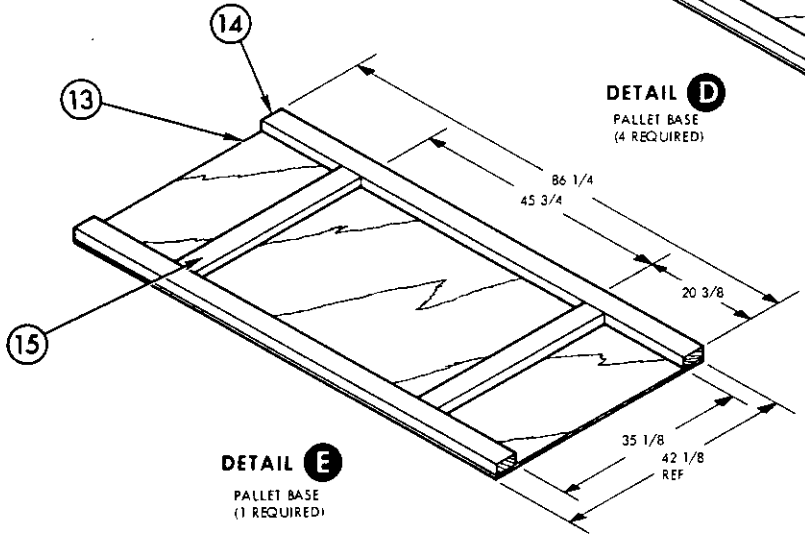

DETAIL E
PALLET BASE
(1 REQUIRED)

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:45Z
Check the source to verify that this is the current version before use.