MILITARY STANDARD


MIL-STD-1320-221 (NAVY)

9 APRIL 1985

TRUCKLOADING MOTOR, 5.0 INCH ROCKET MK 22 MOD 4 (LOADED ASSEMBLY) IN CONTAINER MK 697 MOD 0

CONTAINER DATA

DIMENSIONS	92 L X 14W X 21 1/4H
CUBE	15.8 CU. FT.
GROSS WT.	270 LBS
CONTAINER DWG	5167151
DOT HAZARD CLASSIFICATION	EXPL. B
CG HAZARD CLASSIFICATION	II-B

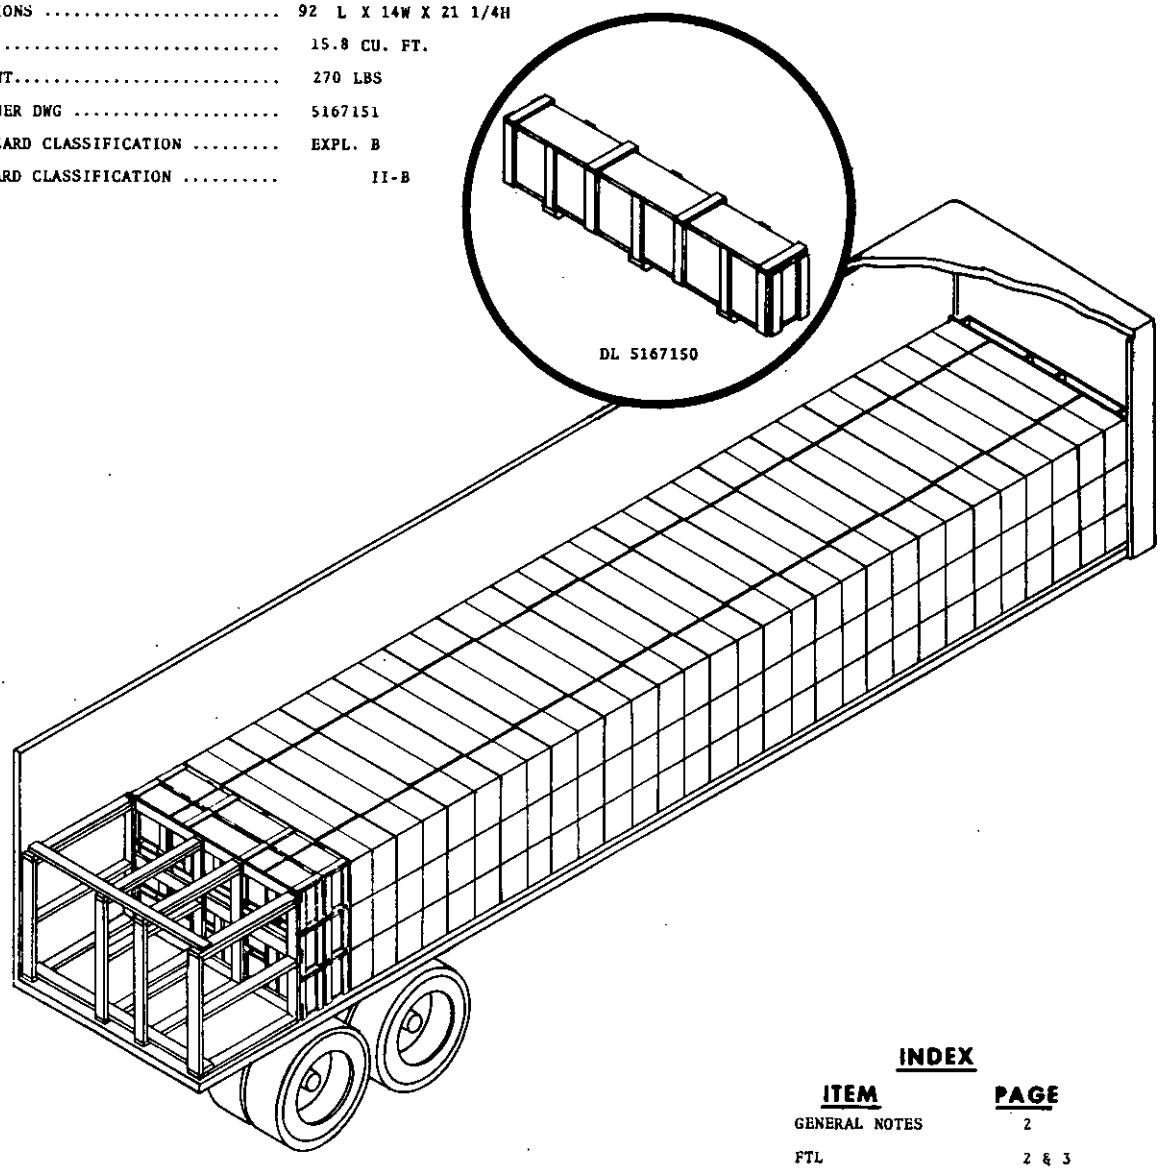

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL	2 & 3
LTL	4
UNITIZING	5

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING, AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

M.S. Gray NWHC 4/9/85
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 4/9/85
SIGNATURE SEASYSCOM, BY DIRECTION DATE

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

ORIGINATOR S.R. Caruso 4/9/85
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE 5.0 INCH ROCKET MOTOR MK 22 MOD 4 IN CONTAINER MK 697 MOD 0.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44 AND 45 FT. TRAILERS (VAN). A FULL TRUCKLOAD (FTL) MAY BE SHIPPED IN VANS WITH BOTH NAILABLE AND NONNAILABLE FLOOR. A LESS THAN TRUCKLOAD (LTL) MUST BE SHIPPED IN A VAN WITH NAILABLE FLOORS.
3. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIIONS.
4. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA. CLOSE AND SEAL TRAILER DOORS AND ATTACH EXPLOSIVES B PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
5. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

CAUTION

VANS USED FOR THIS SHIPMENT MUST HAVE A MINIMUM INSIDE SIDTH OF 93 INCHES

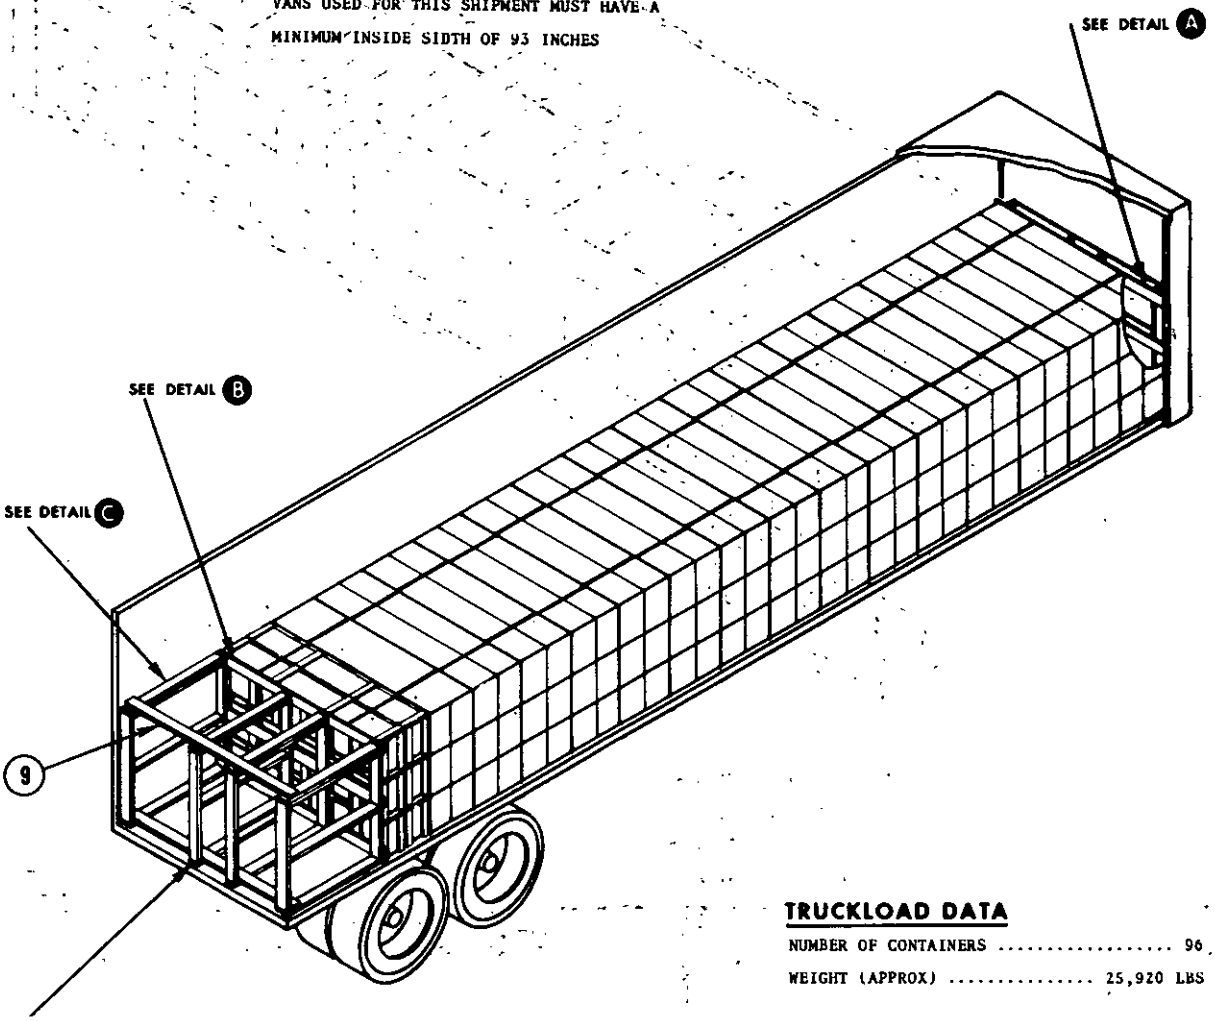

NOTE: NAIL FRAME TO GATE UPRIGHT (PIECE 4 OF DETAIL B) W 8-10d NAIL PER FRAME

TRUCKLOAD DATA

NUMBER OF CONTAINERS 96

WEIGHT (APPROX) ..... 25,920 LBS

FTL 40 FT TRAILER (VAN)


Source: https://assist.dla.mil -- Downloaded: 2020-10-23T23:48Z
Check the source to verify that this is the current version before use.

FTL 40,42,44 &45 FT TRAILERS (VAN)


1. A FTL CONSISTS OF

40 FT. TRAILER	- 96 ROCKET MOTORS
42 FT. TRAILER	- 99 ROCKET MOTORS
44 & 45 FT TRAILER	- 102 ROCKET MOTORS

2. LENGTH OF STRUT, PIECE 8 OF DETAIL C. SHALL BE SUCH AS TO CAUSE THE GATE FRAMES, DETAIL C, TO BEAR AGAINST THE REAR GATE, DETAIL B, AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED.

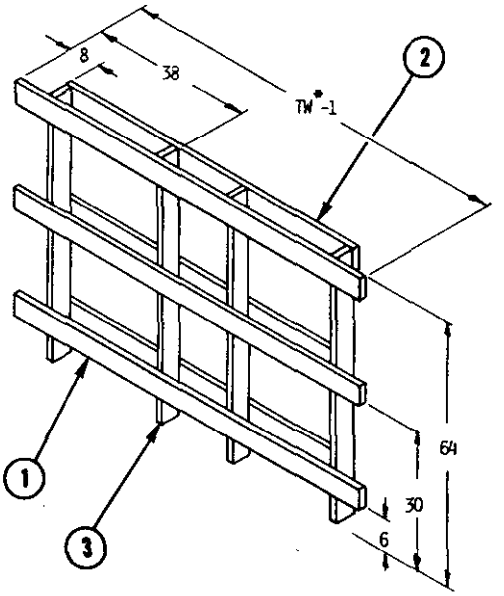


DETAIL A
FRONT BULKHEAD
(1 REQUIRED)

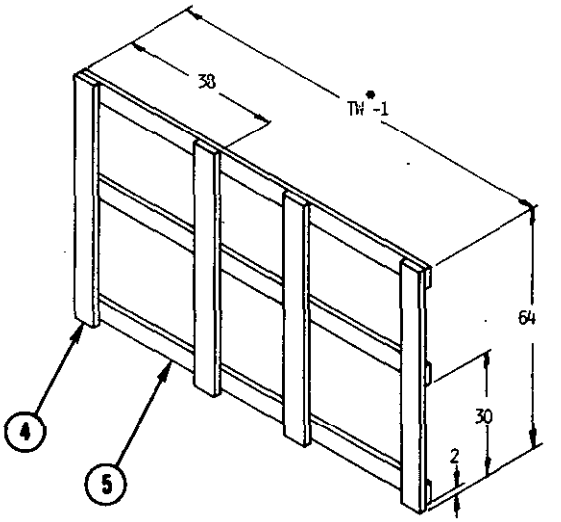

DETAIL B
REAR GATE
(1 REQUIRED)

* TW = TRAILER WIDTH

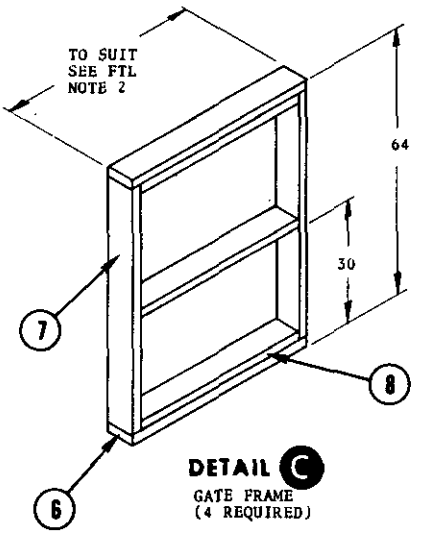

DETAIL C
GATE FRAME
(4 REQUIRED)


ITEM NO.	DESCRIPTION	DIMENSIONS	NO. REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
9	TIE PIECE	2 X 4 X TW*-1	2	11	2 JOINT	16d
8	STRUT	2 X 4 X TO SUIT	12	SEE 10	-	-
7	UPRIGHT	2 X 6 X 61	8	11	2 JOINT	16d
6	LONGITUDINAL	2 X 6 X TO SUIT	8	10	2 JOINT	16d
5	CROSSMEMBER	2 X 6 X TW*-1	4	SEE 7	-	-
4	VERTICAL	2 X 6 X 64	4	8	3 JOINT	10d
3	VERTICAL	2 X 4 X 64	4	SEE 4 & 5	-	-
2	FWD CROSSMEMBER	2 X 6 X TO SUIT	3	6	3 JOINT	10d
1	AFT CROSSMEMBER	2 X 6 X TW*-1	3	6	3 JOINT	10d

LIST OF MATERIALS & NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL ALL LENGTH TRAILERS (VAN)


1. WHEN REQUIRED TO SHIP LTL, FIRST TAKE UNIT LOADS FROM REAR ATTEMPTING TO MAINTAIN 3 HIGH STACKS. (DO NOT USE 3 HIGH STACKS FOR FEWER THAN 78 CONTAINERS.) IF THIS CANNOT BE DONE, THEN ARRANGE UNIT LOADS IN A 2 HIGH STACK AS SHOWN ABOVE. SIMILARLY, 1 HIGH STACKS CAN REPLACE 2 HIGH STACKS IF REQUIRED.
2. BECAUSE OF UNIT LOAD CONFIGURATION, ODD NUMBERS OF CONTAINERS CANNOT BE SHIPPED UNLESS ONE UNIT LOAD IS BROKEN DOWN AND THE EXTRA SINGLE CONTAINER IS BLOCKED AND BRACED SEPARATELY AT THE REAR OF THE TRAILER.

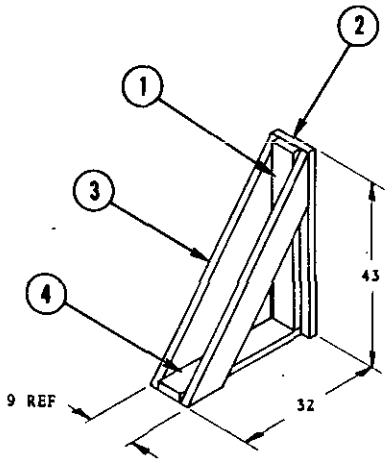

DETAIL D
KNEE BRACE
FOR 2 HIGH STACK



KNEE BRACE
FOR 1 HIGH STACK

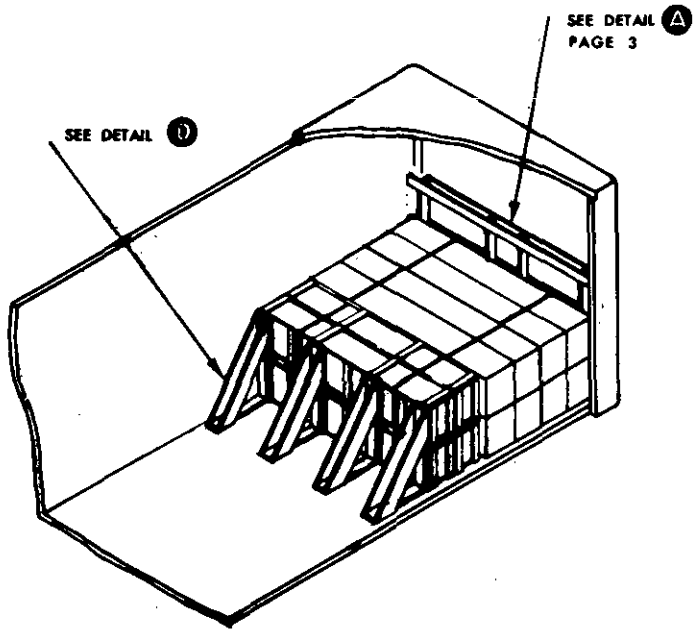


ITEM NO.	DESCRIPTION	DIMENSIONS	NO. REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
11	SEAL	3/4	2 EA	-	-	-
10	STEEL STRAPPING	3/4 X 035 X 9 FT	2 EA	-	-	-
9	UNITIZING BATTEN	2 X 4 X 26	2 EA	-	-	-
8	BRACE, CLEAT	2 X 6 X 14 1/2	4	TRAILER FLOOR	6	16d
7	BRACE, DIAGONAL	2 X 6 X TO SUIT	8	5 + 8	4/JOINT	16d
6	BRACE, BACKUP	2 X 10 X 22	4	8	3	16d
5	BRACE, UPRIGHT	2 X 6 X 20 1/2	4	6	6	10d
4	BRACE, CLEAT	2 X 6 X 30 1/2	4	TRAILER FLOOR	6	16d
3	BRACE, DIAGONAL	2 X 6 X TO SUIT	8	4 + 1	4/JOINT	16d
2	BRACE, BACKUP	2 X 10 X 43	4	4	3	16d
1	BRACE, UPRIGHT	2 X 6 X 41 1/2	4	2	6	10d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

1. THIS UNIT LOAD IS DETAILED IN MIL-STD-1322-71 AND IS TO BE USED IN ALL TRANSPORTATION AND HANDLING OPERATIONS.

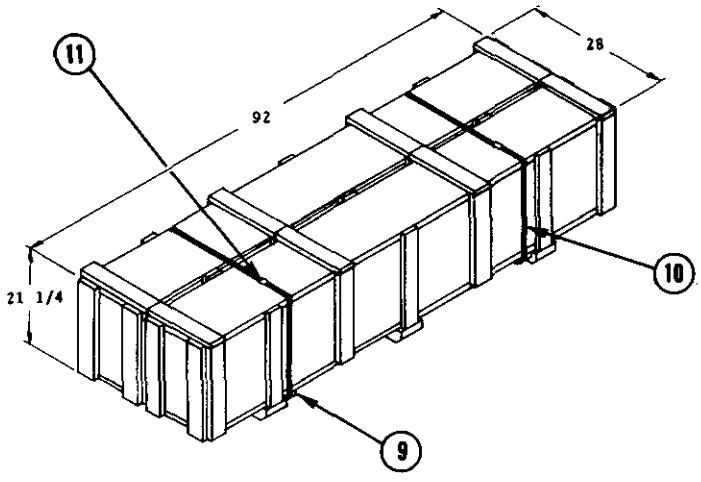

A. PLACE UNITIZING BATTENS, ITEM 9, INSIDE THE OUTBOARD SKIDS AS SHOWN, SECURE WITH 3/4 STRAPPING, ITEM 10, AND DOUBLE NOTCH SEAL, ITEM 11.

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 605-036/24495

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.