MILITARY STANDARD

MIL-STD-1320-244
(NAVY)

25 October 1990

TRUCKLOADING
MINE, UNDERWATER,
MK 67 MOD 0 (SLMM) BARE

MINE DATA

DIAMETER ..... 19 INCHES


LENGTH ..... 161 INCHES

WEIGHT ..... 1760 POUNDS △


CUBE ..... 41.1 CUBIC FEET

△ DO NOT USE FOR SHIPPING WEIGHT

HAZARD CLASSIFICATION		
DODIC/NALC	ITEM NAME	DOT
UM89	OA-01 CONFIG A	CLASS A
UM90	OA-02 CONFIG A	CLASS A
R962	ACTUATION	CLASS B
R682	LAYING	INERT
R683	SHOP	INERT
R684	HANDLING	INERT

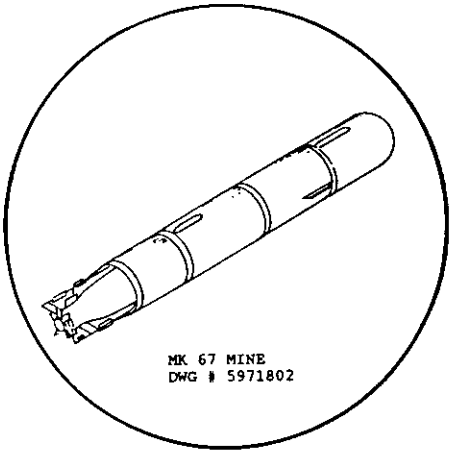

MK 67 MINE
DWG # 5971802

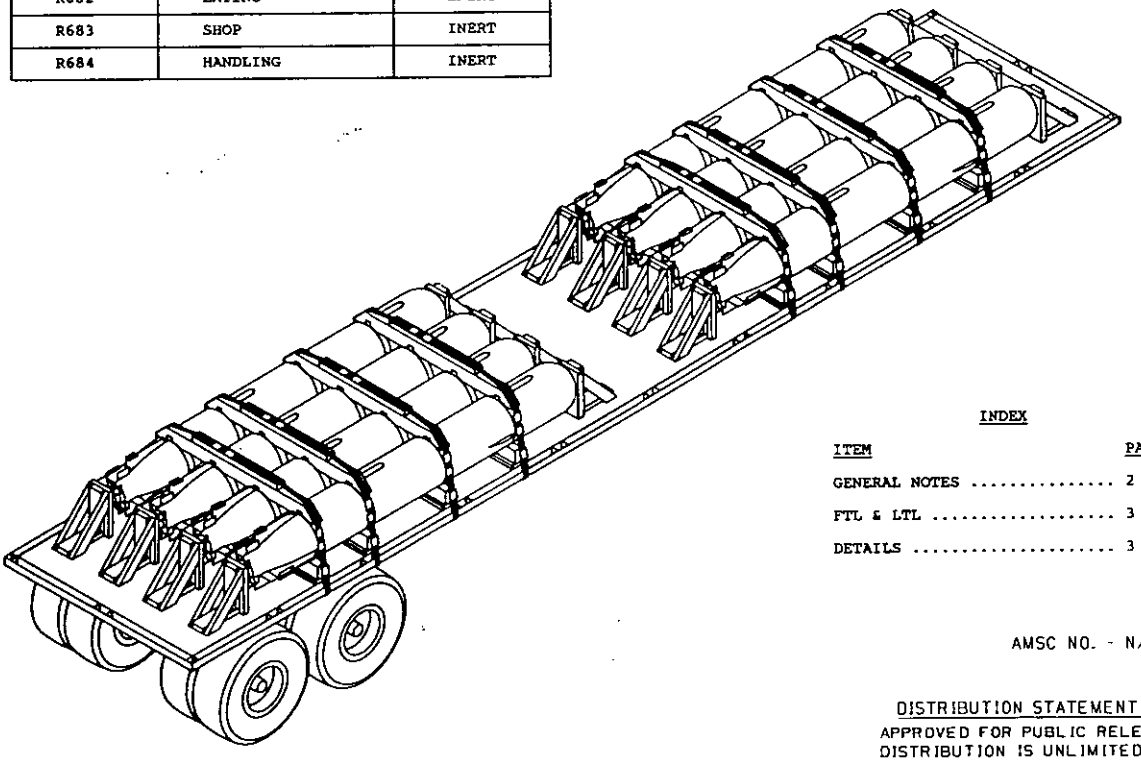

INDEX

ITEM	PAGE
GENERAL NOTES	2 & 5
FTL & LTL	3 & 5
DETAILS	3 & 4

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) — DATE 10/11/90

SIGNATURE SEASYSCOM BY DIRECTION — DATE 10/11/90

ORIGINATOR — DATE 10/10/90


WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


GENERAL NOTES

1. THIS STANDARD PROVIDES DETAILED INSTRUCTION FOR TRUCKLOADING THE MK 67 MOD 0 MINE (SLMM) BARE ON CHOCKS.
2. THE PROCEDURES AND PRACTICES CONTAINED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS. THE TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER) AND HAVE NAILABLE FLOORS.
3. DOUBLE FLATBED TRAILERS MAY BE USED, STATE LAWS PERMITTING, BY LOADING ONE STACK OF MINES PER TRAILER USING THE APPROPRIATE PRINCIPLES OF THIS DOCUMENT.
4. ONLY STEEL STRAPS SHALL BE USED FOR TIEDOWNS. STRAPS SHALL BE 2 X .050 AND SHALL BE APPLIED AS SPECIFIED IN THE BASIC TRUCKLOADING DOCUMENT, MIL-STD-1320, AND THIS DOCUMENT.
5. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THEY WILL NOT BE EXCEEDED.
6. AFTER THE BLOCKING, BRACING AND TIEDOWNS HAVE BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO THE DUNNAGE IN AN ACCESSIBLE AREA.
7. ALL MK 67 MINES SHALL BE COMPLETELY COVERED WITH A WATERPROOF TARPAULIN.
8. UNLESS OTHERWISE SPECIFIED ALL MATERIAL SHALL BE SPECIFIED BY THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.
9. FOR GENERAL TRUCKLOADING PROCEDURES, REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

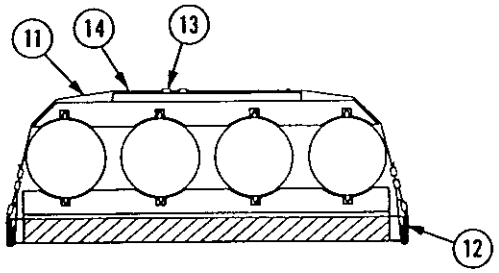


SECTION A-A

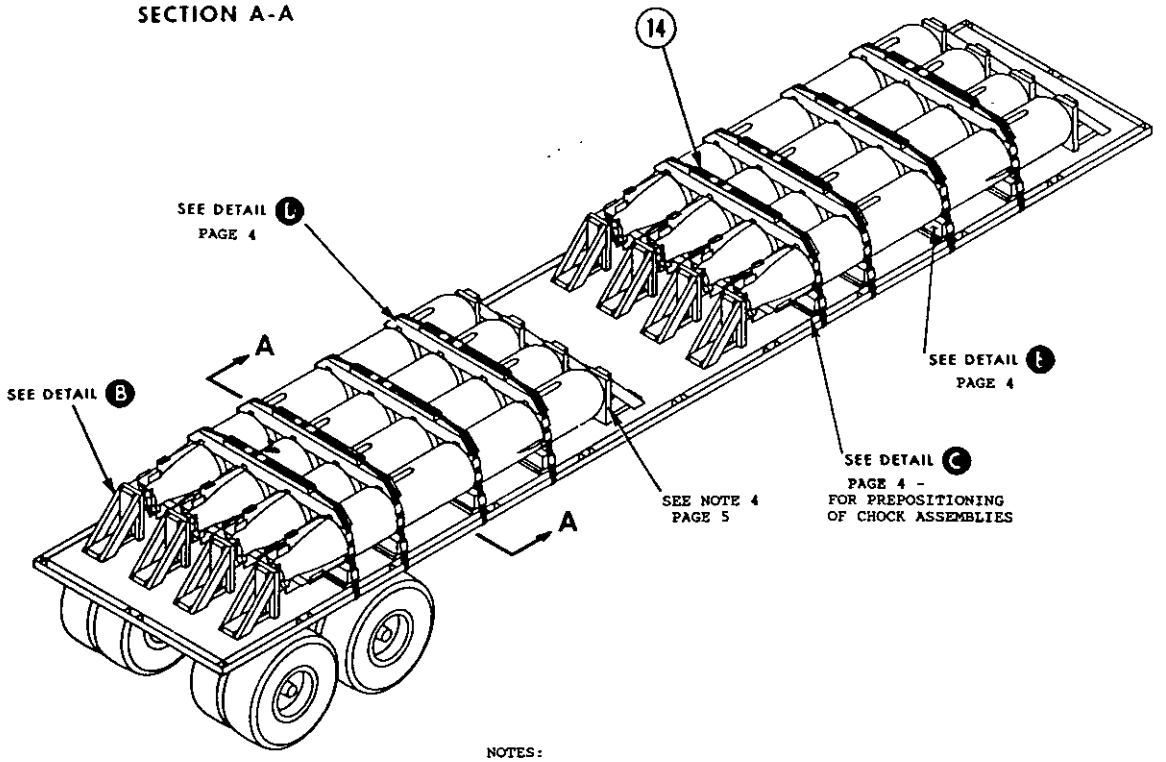

NOTES:


1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1320 (NAVY).
2. DO NOT USE TYPE 1 STRAPPING WITH POWER TOOLS.

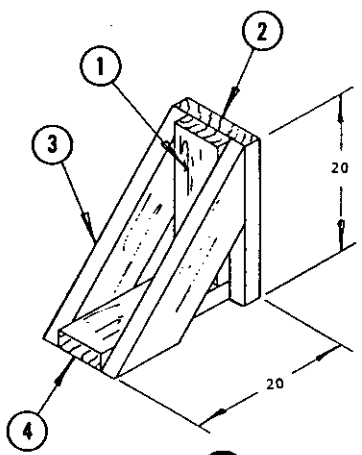

DETAIL B
(16 REQ'D)


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
AR	15	ADHESIVE	MMM-A-121 NOTE 5 PAGE 5	
AR	14	STAPLE	F/2-INCH STRAP	
64	13	SEAL	F/2-INCH STRAP	
16	12	PAD (STEEL STRAP)		2 X .050 X 18 FT
8	11	STEEL, STRAP		2 X .050 X 16FT 6IN
8	10	CLEAT		2 X 4 X 44
64	9	PAD, RUBBER	MIL-R-6855 CL 2 NOTE 4 PAGE 5	1/4 X 3-1/2 X 5
8	8	CHOCK, TOP	DETAIL D	4 X 6 X 85
64	7	PAD, RUBBER	MIL-R-6855, CL 2, TYPE A NOTE 4 PAGE 5	1/4 X 3-1/2 X 5
8	6	CHOCK, BOTTOM	DETAIL E	4 X 6 X 20
8	5	BASE, CHOCK	DETAIL E	2 X 6 X 20
16	4	BRACE, CLEAT	DETAIL B	2 X 4 X 18-1/2
32	3	BRACE, DIAGONAL	DETAIL B	2 X 6 X TO SUIT
16	2	BRACE, BACKUP	DETAIL B	2 X 10 X 20
16	1	BRACE, UPRIGHT	DETAIL B	2 X 6 X 18-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

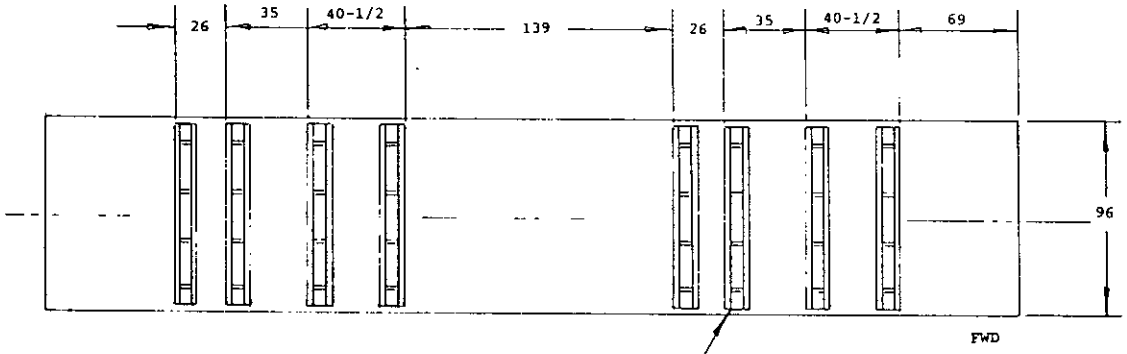


5 6 SEE DETAIL E FOR NAILING PROCEDURES

DETAIL C
(CHOCK PREPOSITIONING)

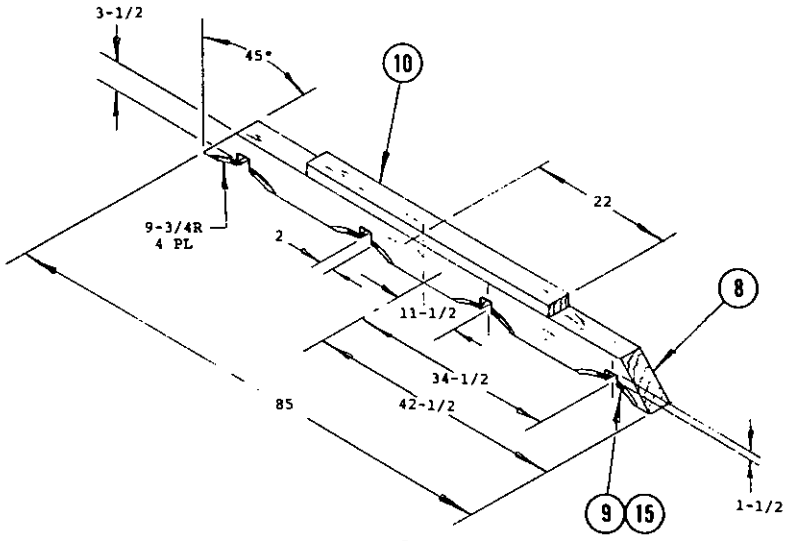

DETAIL D
(8 REQUIRED)

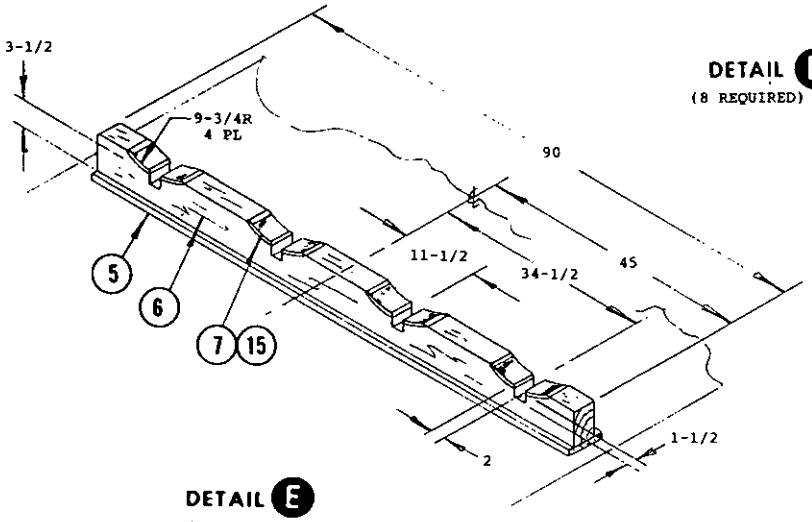

DETAIL E
8 REQUIRED
PREPOSITIONED

NAILING NOTES:

1. NAIL CHOCK BASE, ITEM 5 TO TRAILER FLOOR W/6-16d NAILS.
2. TOE NAIL BOTTOM CHOCK, ITEM 6 TO ITEM 5, W/6-16d NAILS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

FTL & LTL 40 FT FLATBED TRAILER - BARE MK 67 MINE ON CHOCKS

1. A FULL TRUCKLOAD FOR A TRAILER CONSISTS OF EIGHT (8) MINES (BARE). LESS THAN THIS AMOUNT MAY BE SHIPPED BY MODIFYING THE TOP AND BOTTOM CHOCKS TO SUIT THE QUANTITY BEING SHIPPED. THE METHOD AND NUMBER OF TIEDOWNS SHALL BE THE SAME IN ALL CASES.
2. SEE DETAIL C PAGE 4 FOR PREPOSITIONING OF THE BOTTOM CHOCK ASSEMBLIES PRIOR TO LOADING THE MINES.
3. WHEN POSITIONING THE MINES ON THE CHOCKS, THE JOINT BANDS OF THE MINE SHALL REST ON THE CHOCKS.

WARNING

WHEN LOWERING THE MINES ONTO THE CHOCKS, EXERCISE CARE TO SEE THAT THE BOTTOM RUNNER IS IN THE SLOT PROVIDED *IN THE CHOCKS*.

4. BOND PADS ITEMS 7 AND 9 TO TOP AND BOTTOM CHOCKS (DETAILS D AND E) WITH ADHESIVE ITEM 15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.