MILITARY STANDARD

MIL-STD-1320-250
(NAVY)
1 DECEMBER 1989


TRUCKLOADING

ROCKET MOTOR, MK 114 MOD 0


IN CONTAINER MK 733 MOD 0

UNIT LOAD DATA

DIMENSIONS . . . . 85 3/4 L X 24 3/4 W X 27 1/2 H
GROSS WEIGHT . . . . . , 1025 LBS Δ
CUBE . . . . . 33.8 CU FT
Δ DO NOT USE FOR SHIPPING WEIGHT



HAZARD CLASSIFICATION		
DODIC/NALC	ITEM NAME	DOT
1337	MK 114 MOD 0	CLASS B
N/A	EMPTY CONTAINER	INERT

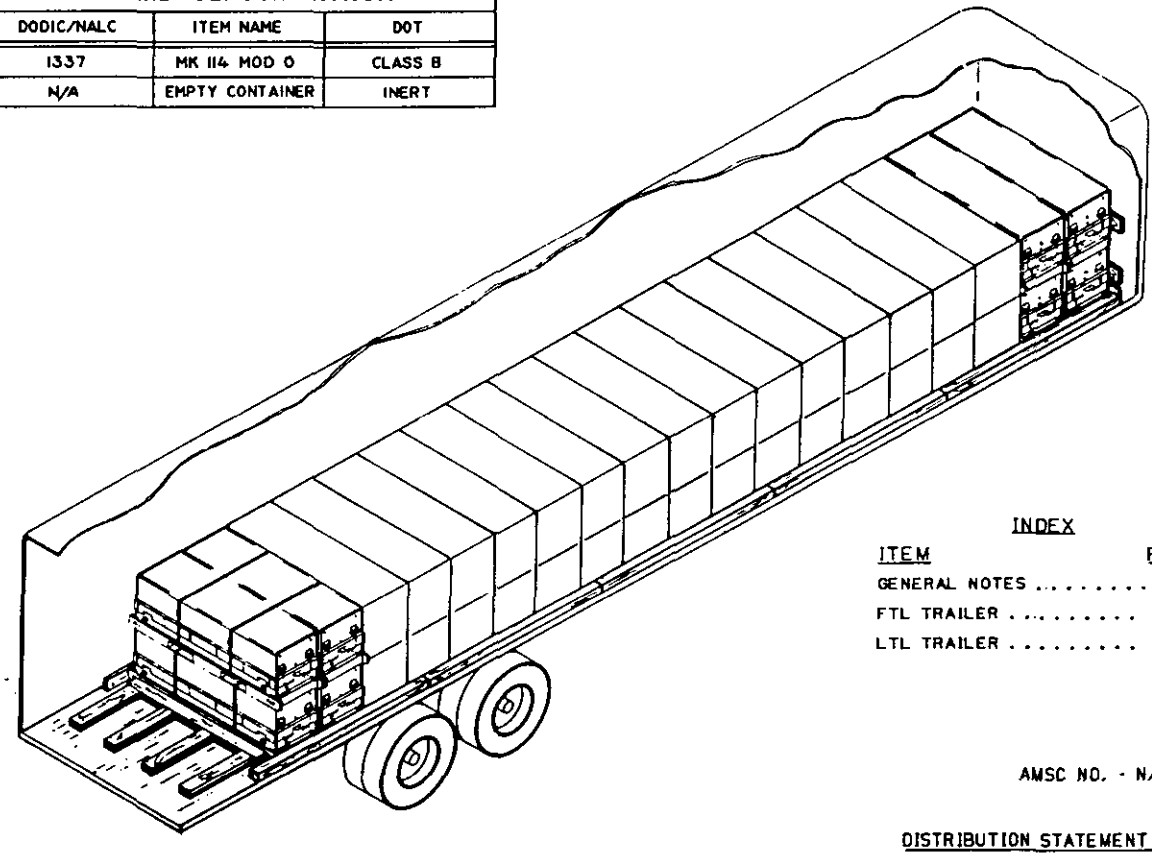

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	2 & 3
LTL TRAILER	4 & 6

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE TDA, WPNSTA EARLE 12/1/89 DATE

SIGNATURE AIRSYSCOM BY DIRECTION 12/1/89 DATE

ORIGINATOR David W Fogg 1 DEC 89 DATE

WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING MK 114 ROCKET MOTORS IN THE MK 733 MOD 0 CONTAINER.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 45-FT VAN TRAILERS. ALL TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED 10 FT MINIMUM FORWARD FROM THE EXTREME REAR OF THE TRAILER.
3. THE CONTAINERS, WHEN STACKED 2 HIGH, SHALL BE UNITIZED TOGETHER AS SHOWN IN DETAIL C OF PAGE 5.
4. THE LAST 4 CONTAINERS, WHEN STACKED 2 HIGH, SHALL BE STRAPPED TOGETHER AS SHOWN IN DETAIL D OF PAGE 5.
5. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
6. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA. CLOSE AND SEAL THE TRAILER DOORS.
7. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
8. ON LESS THAN TRUCKLOADS REDUCE CONTAINERS AS REQUIRED FROM THE REAR OF THE TRAILER. THE FRONT STACKS MAY BE REDUCED TO 1 HIGH TO ACHIEVE DESIRED AXLE LOADING DISTRIBUTION. WHERE A 2 CONTAINER HIGH STACK MEETS A SINGLE CONTAINER, USE THE BLOCKING OF DETAIL E OF PAGE 6.
9. FOR 45-FT TRAILERS WITH THE REAR WHEELS IN THE EXTREME REAR (WESTERN POSITION), LOAD 36 CONTAINERS WITH THE FIRST 2 STACKED 1 HIGH AND SEPARATED BY DETAIL E.
10. FOR 48-FT TRAILERS LOAD 38 CONTAINERS WITH THE FIRST 4 STACKED 1 HIGH AND SEPARATED BY DETAIL E. NAIL DOUBLED 2 X 6 BOARDS FOR SLEEPERS ON LEFT SIDE OF TRAILER FLOOR AND DOUBLED 2 X 8 BOARDS FOR SLEEPERS ON RIGHT SIDE OF TRAILER FLOOR.
11. FOR 40-FT TRAILERS LOAD 34 CONTAINERS 2 LAYERS HIGH USING THE SAME BLOCKING AS SHOWN ON 45-FT FTL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


FTL 45 FT TRAILER (VAN)

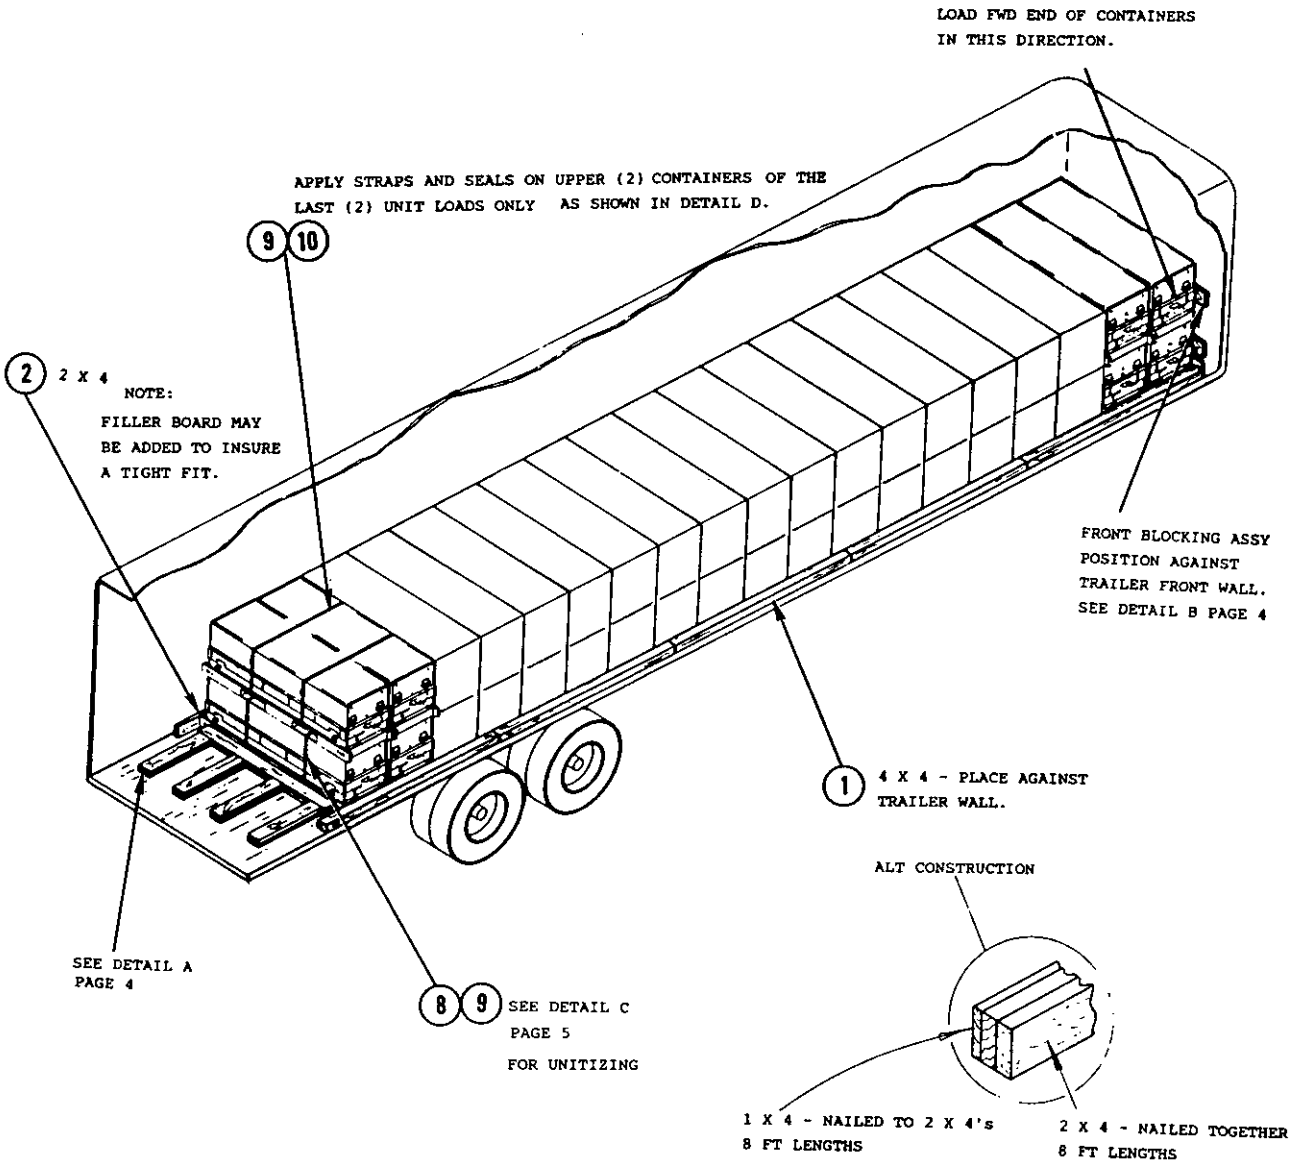


* TW = TRAILER WIDTH

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
LIST OF MATERIALS				
2	10	STRAPPING	DETAIL D	3/4 X .035 X 14 FT 6 IN.
40	9	SEAL	DETAIL C & D	3/4 X .035
38	8	STRAPPING	DETAIL C	3/4 X .035 X 10 FT
3	7	HORIZONTAL REAR	DETAIL B	2 X 6 X 72
3	6	HORIZONTAL FRONT	DETAIL B	2 X 6 X TW-1
4	5	POST	DETAIL B	4 X 4 X 48
2	4	CROSS MEMBER	DETAIL A	2 X 6 X 72
8	3	BACKUP CLEAT	DETAIL A	2 X 6 X 36
5	2	SIDE CLEAT		2 X 4 X 96
5	1	SIDE CLEAT		4 X 4 X 96

Source: https://assist.dla.mil -- Downloaded: 2020-10-23 23:49Z
Check the source to verify that this is the current version before use.

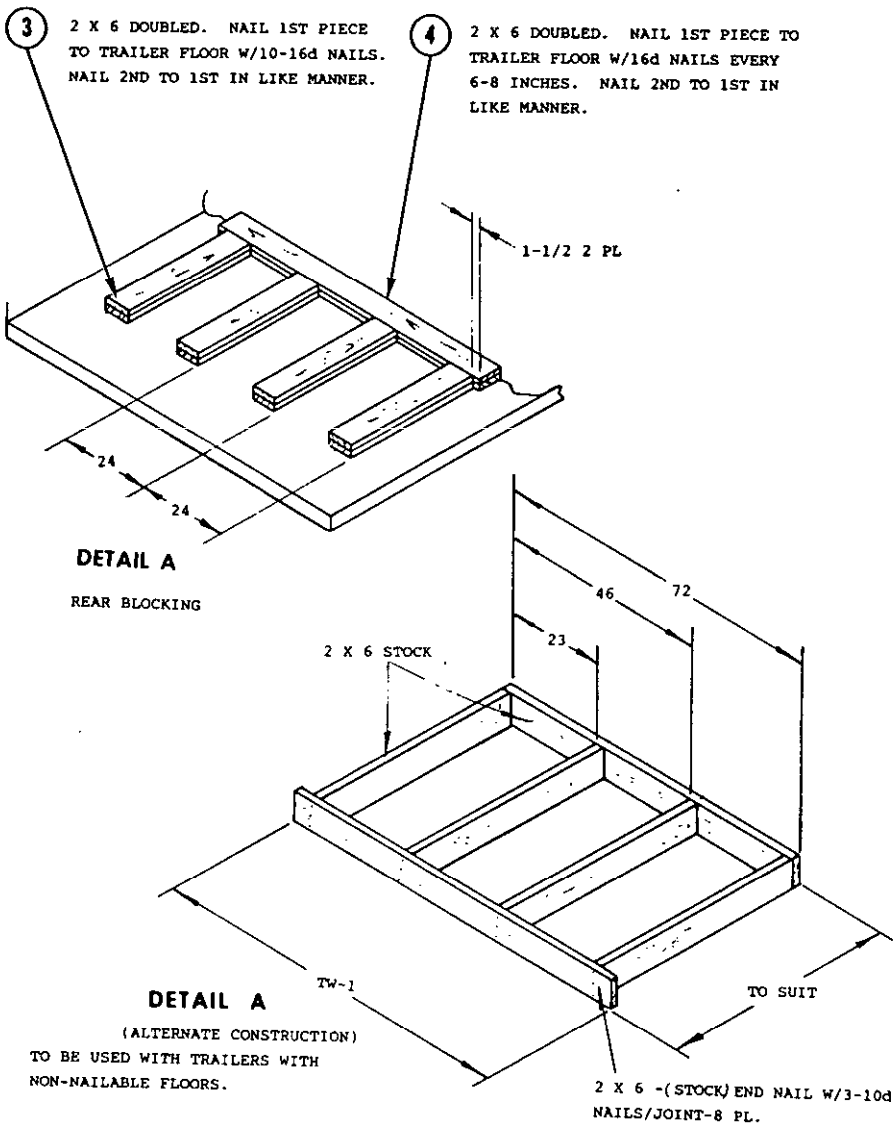


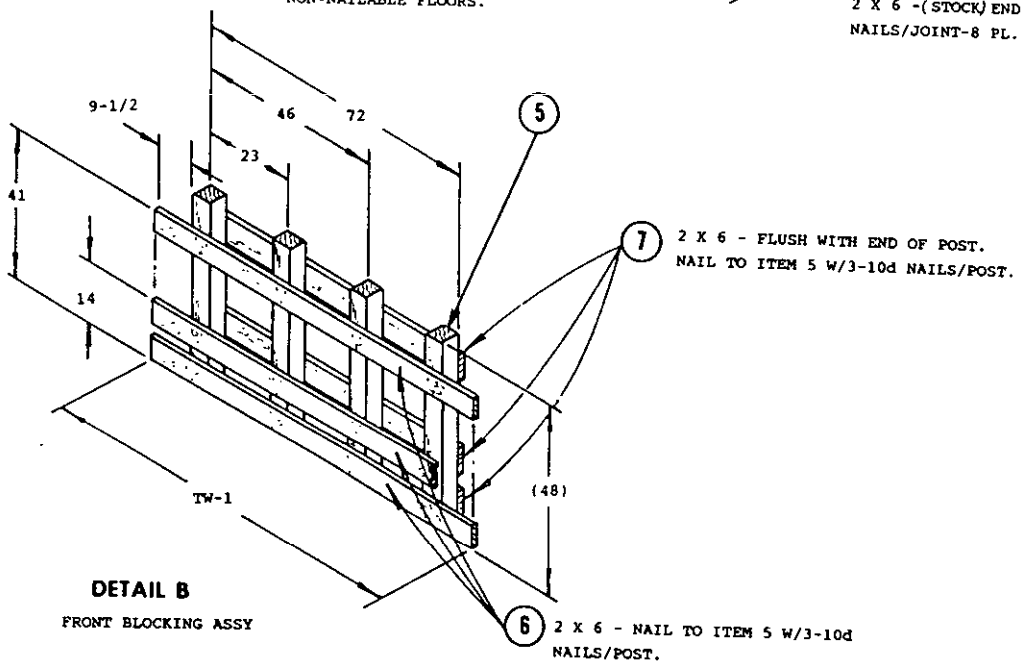

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE


1. PLACE STRAP, ITEM 8, THROUGH FORK POCKETS OF BOTH CONTAINERS, TENSION AND DOUBLE NOTCH THE SEALS, ITEM 9

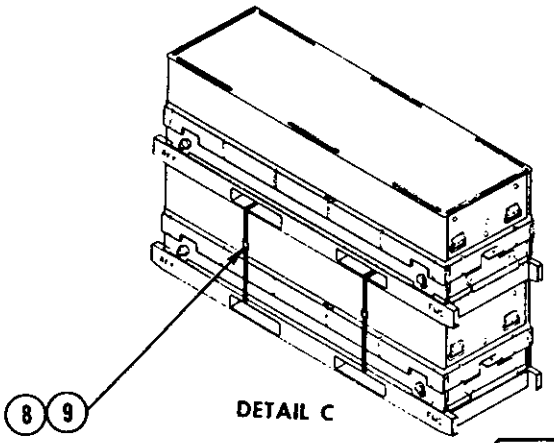

DETAIL C

WARNING

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS TWO (2) HIGH IS AUTHORIZED FOR LOADING AND UNLOADING OF TRAILERS ONLY. ANY MOVEMENT OF THESE LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

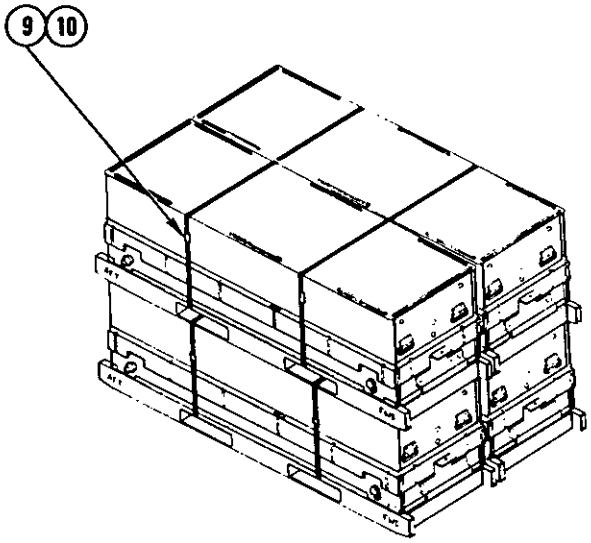

DETAIL D

DOUBLE UNITIZING
(LAST 4 CONTAINERS ONLY)

1. ALIGN TWO UNIT LOADS ALONGSIDE OF ONE ANOTHER.


2. PLACE STRAP, ITEM 10, THROUGH THE FORK POCKETS OF THE TWO UPPER CONTAINERS.

3. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


LTL (VAN)

USE DETAIL F WHEN SHIPPING ONE STACK HIGH AGAINST TWO STACK HIGH.

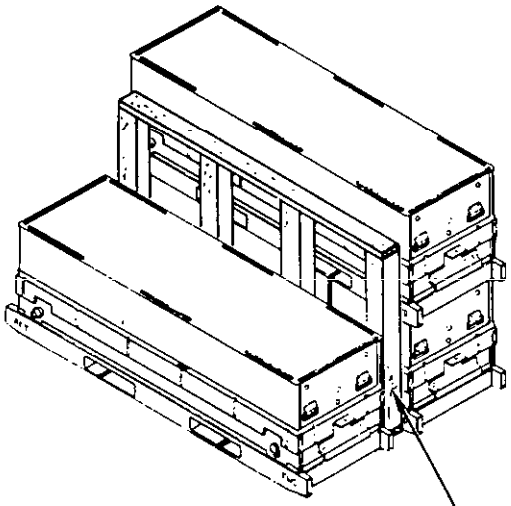

DETAIL E

SEE DETAIL F

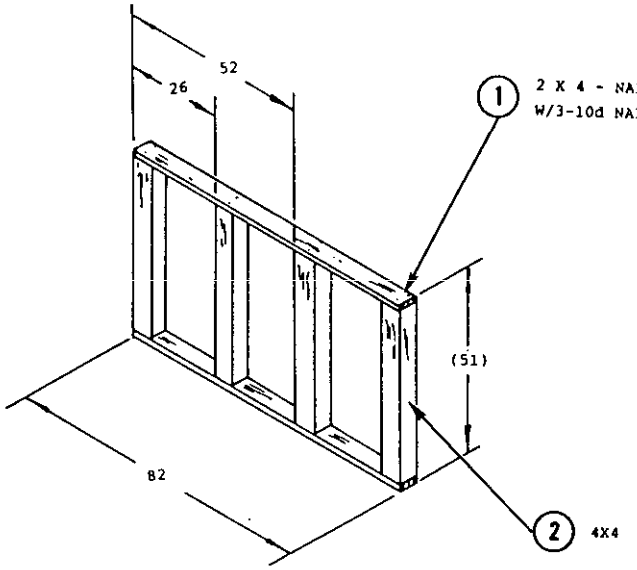

DETAIL F

(SEPARATOR ASSY)

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	2	SUPPORT POST		4 X 4 X 48
2	1	PLATE		2 X 4 X 82

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.